CROW WING COUNTY S108
COUNTY SURVEYOR-1981 TIES

1

CRow WiNG Co.

1981 Remonumentation Contract S-108

TWP 136N, RGE 26 W OF THE 5th P.M.

NOTE: CROW WING County LCB REFERS TO CWCSO INDEX CARDS AT THE TIME OF SEARCH.

TJB.
10/5/81

CROW WING CO. HWY. DEPT.
RECEIVED
OCT - 5 REC'D
INDEXED 10/6/81 TJB
BY
BRAINERD, MINN.

Sept 1, 1981

INDEX

TWP 136 · RGE. 26 5th P.M.

Page	Cor. Desc.	Page	Cor. Desc.
1.	So 1/4 Cor Sec. 10	25.	EAST 1/4 Cor Sec. 4
2.	SE Cor Sec 10	26.	MC North Line Sec. 7 ON Goggle Lake
3.	N 1/4 Cor Sec 16		
4.	NW Cor Sec 16	27.	MC North Line Sec 2 WEST Side Bass Lake
5.	NE Cor Sec 18		
6.	N 1/4 Cor Sec 17		
7.	N.W. Cor Sec 2		
8.	WEST 1/4 Cor Sec 4		
9.	N 1/4 Cor Sec 28		
10.	MC EAST Line Sec 31		
11.	MC EAST Line Sec 35		
12.	NE Cor Sec 35		
13.	MC North Line Sec 36		
14.	NE Cor Sec 32		
15.	N 1/4 Cor Sec. 33		
16.	N 1/4 Cor Sec 18		
17.	MC. EAST Line Sec 4		
18.	NE Cor of SE 1/4 NE 1/4		
19.	SW Cor Sec 2		
20.	EAST 1/4 Cor Sec 10		
21.	MC North Line Sec 10		
22.	E 1/4 Cor Sec 7		
23.	NE Cor Sec 19		
24.	E 1/4 Cor Sec 19		

NO. 447

TELEDYNE

Time Spent 1 hour

1/4 cor. Common to Sec 10-15 136-26

J-15

Sept 1, 1981

Tom Garlinghouse

Steve Blanich

Terry Savaloja

3

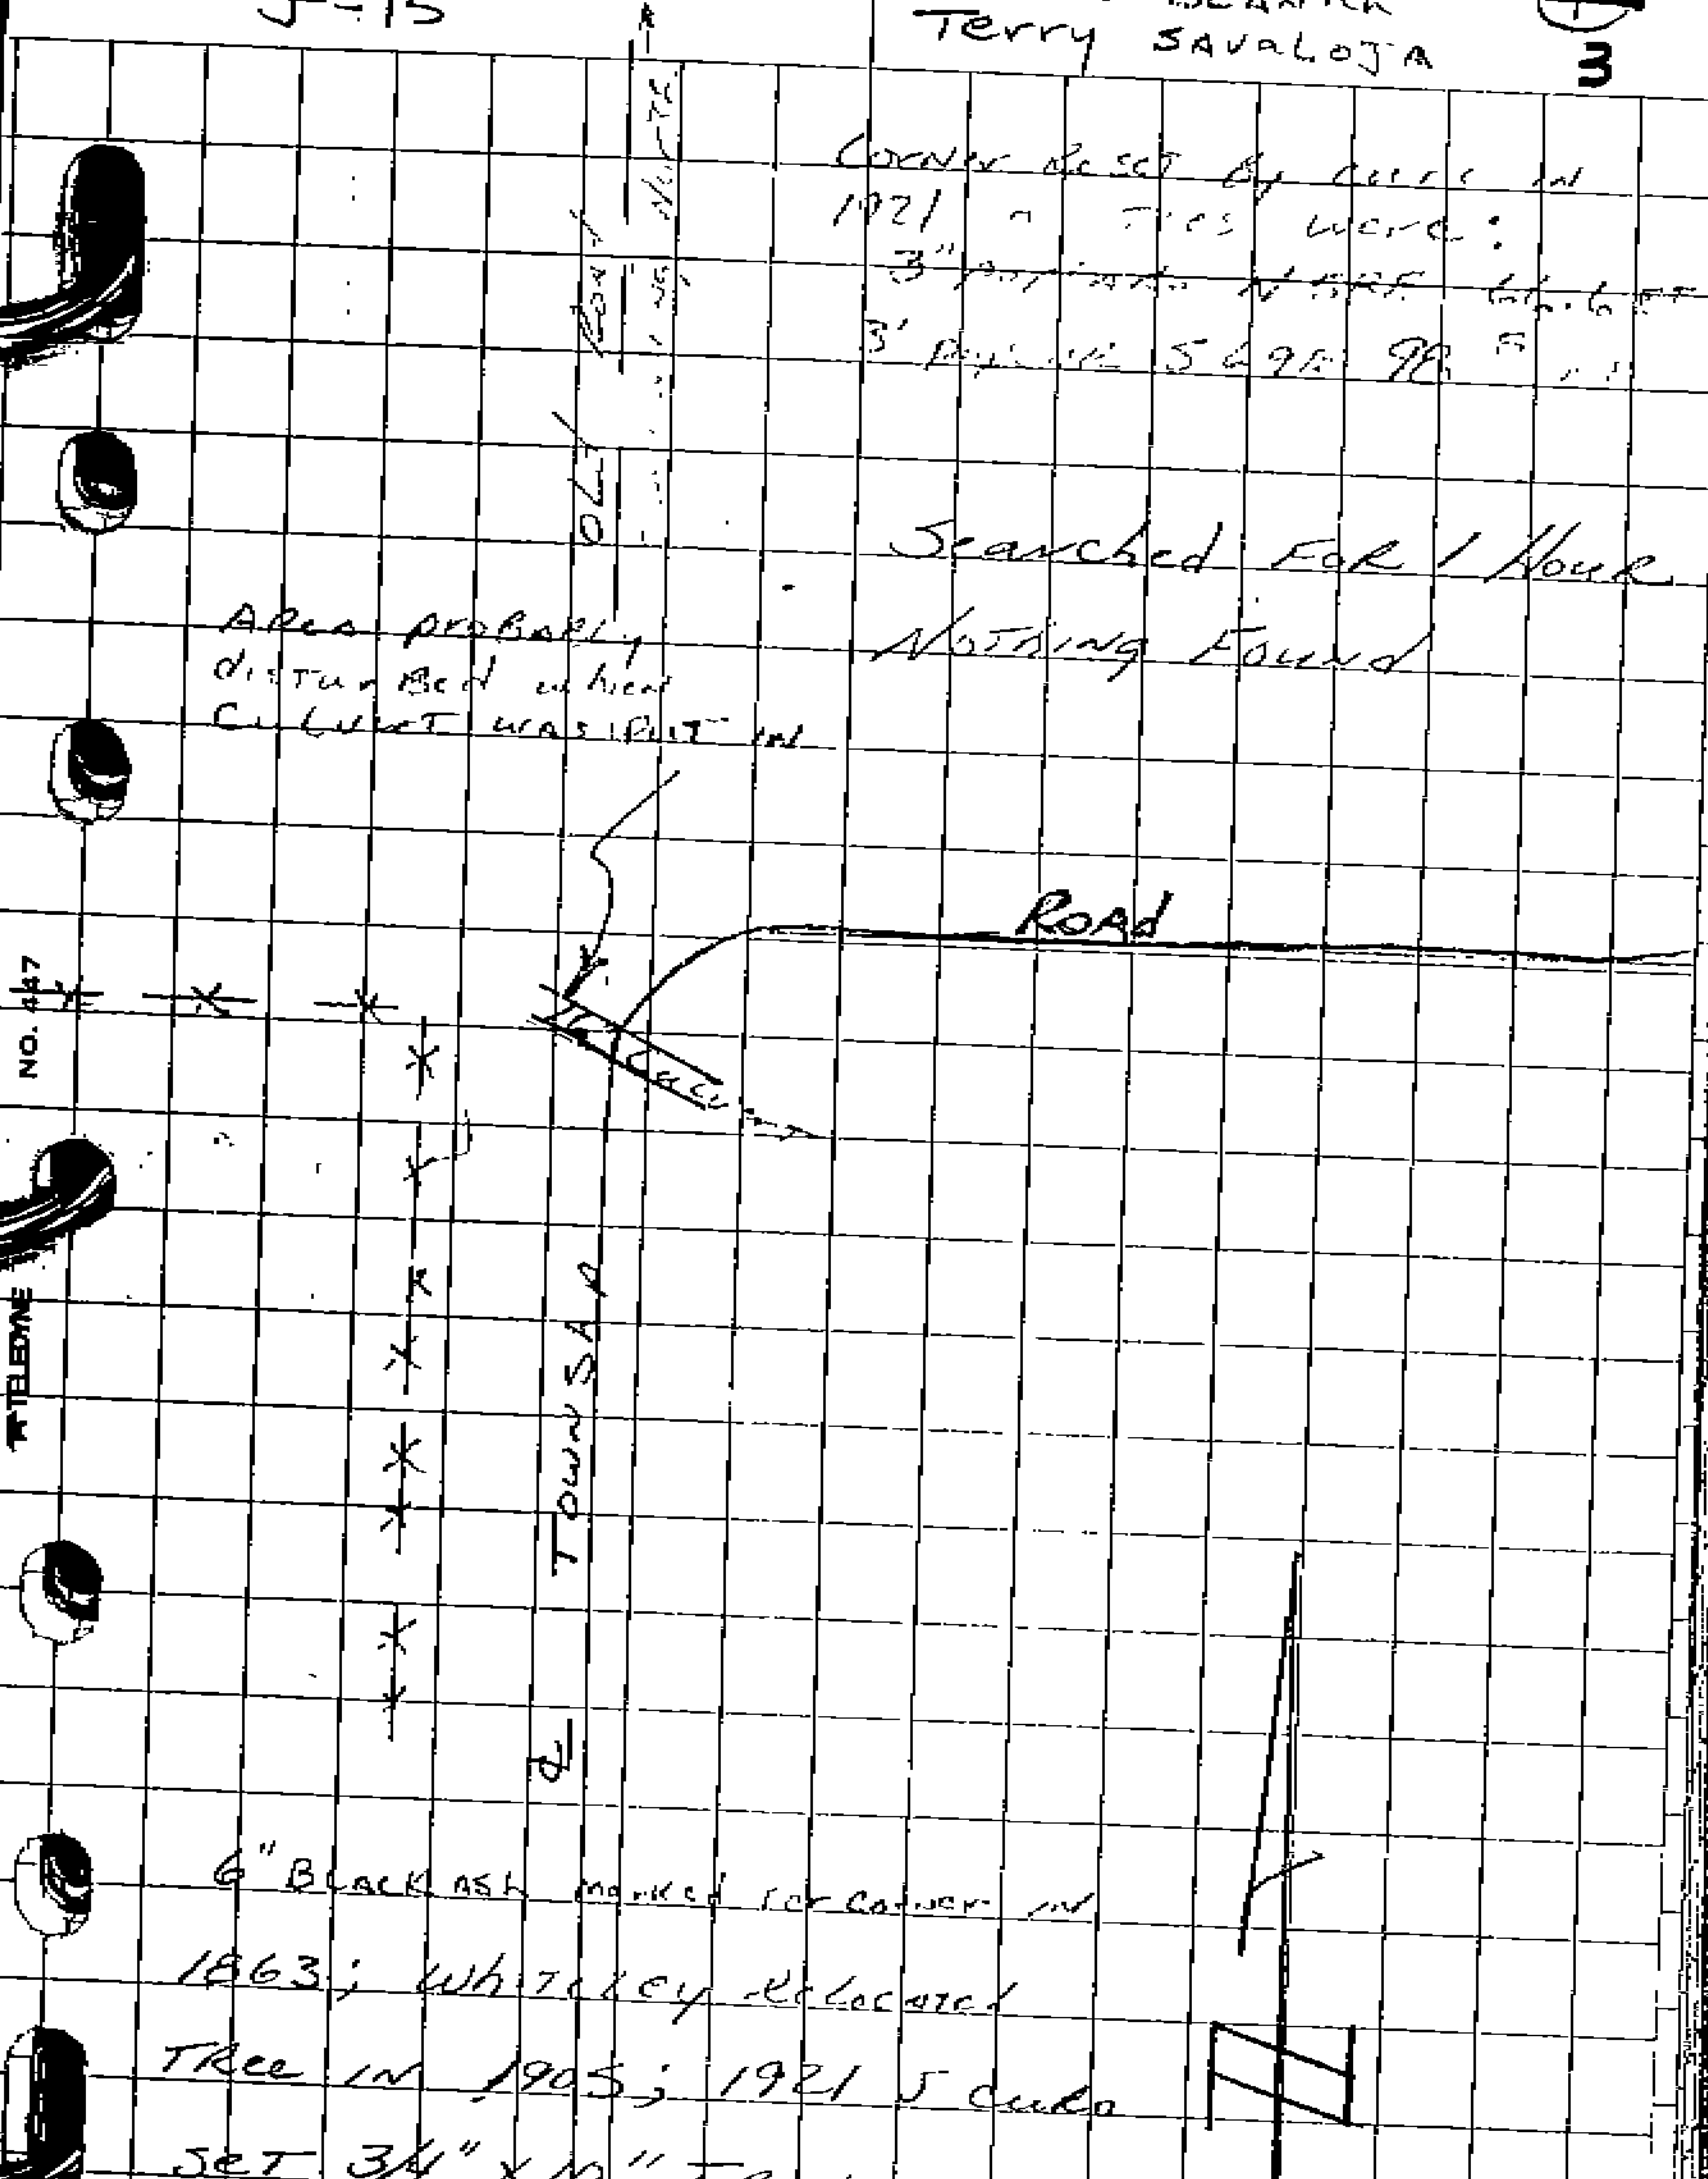

Corner Reset by [illegible] in 1921 & Ties were:

3" [illegible] N [illegible] [illegible]

3' [illegible] S 69E 98 [illegible]

Searched For 1 Hour

Nothing Found

Area probably disturbed when culvert was put in

6" Black ash marked for corner in 1863; Whitley relocated Tree in 1905; 1921 J Cula

Set 3/4" x 10" Iron monument.

Sept 1, 1981
Tom Garlinghouse
Steve Blanick
Terry Savaloja

Corner Common To
Sections 10-11
14-15 T 136-26
J-17

~~2~~ 4

Nail in 18 Red oak West/NW		97^{30}
Nail in 12" Poplar	NW	95^{60}
Nail in 4" Poplar	SW	119^{20}

Time 5 [illegible] 1 Hour

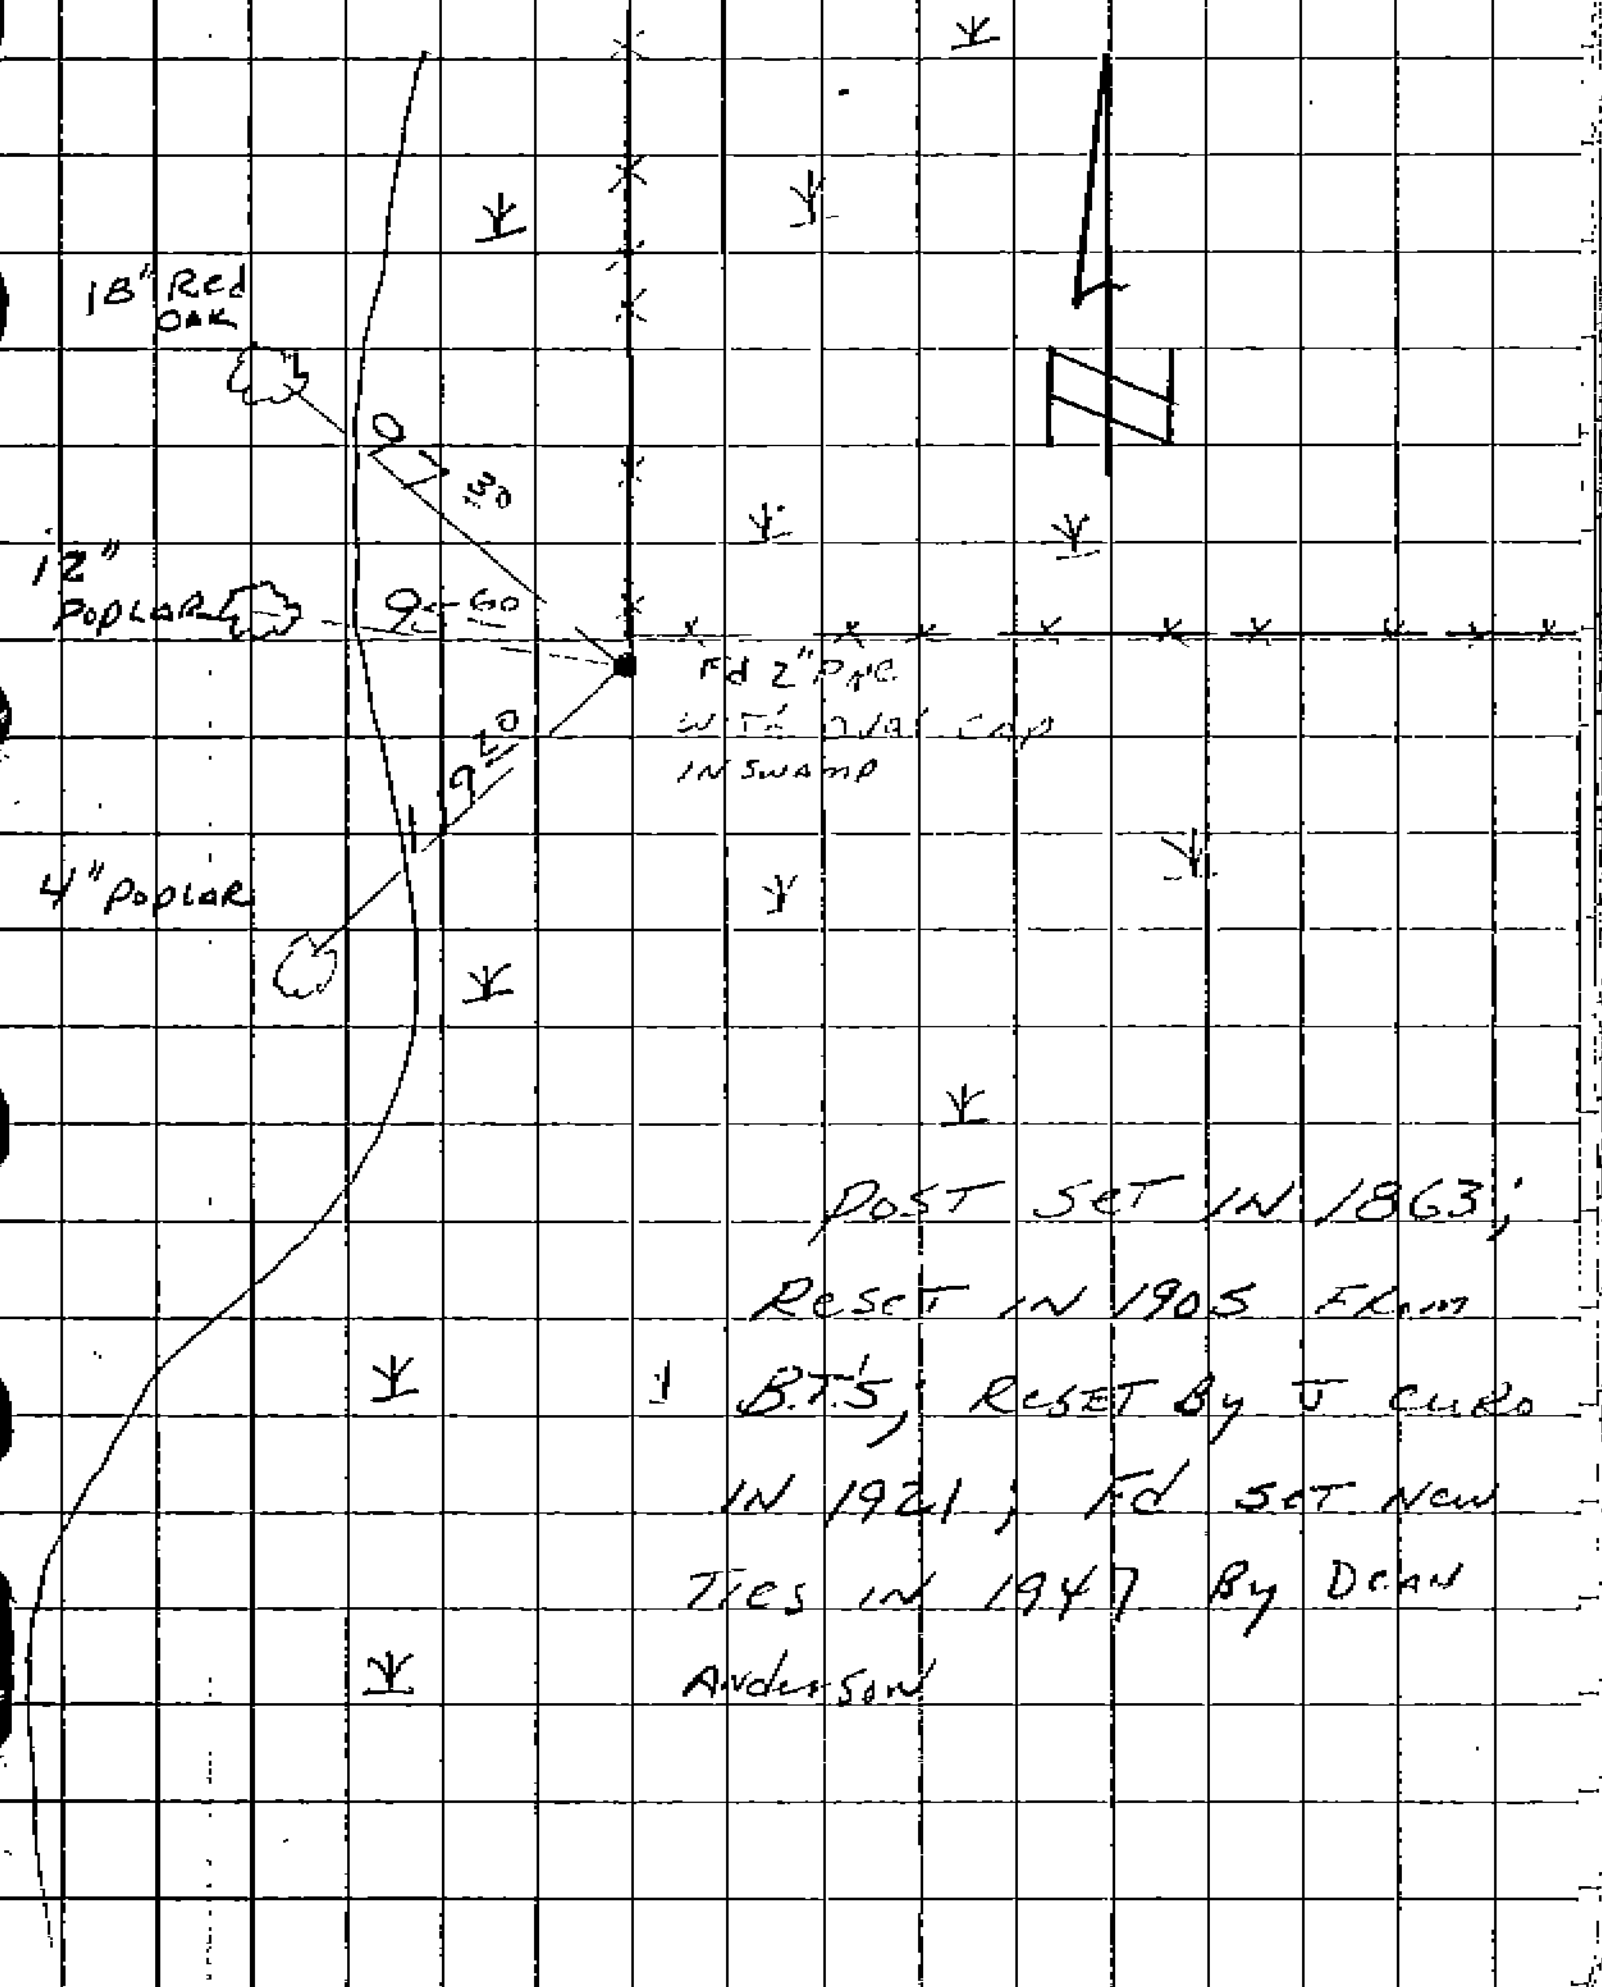

Post set in 1863; Reset in 1905 From 1 BT'S; Reset By J Curo in 1921; Fd set New Ties in 1947 By Dean Anderson

126

September 1, 1981
Tom Garling [illegible]
Steve Blanick
Terry Savaloja

N 1/4 Cor Sec 16-136-26
J-11
③
Time Spent 1/2 hour 5

Fd 3" Iron pipe in place
0^{1} above ground S.W. of PI of Road

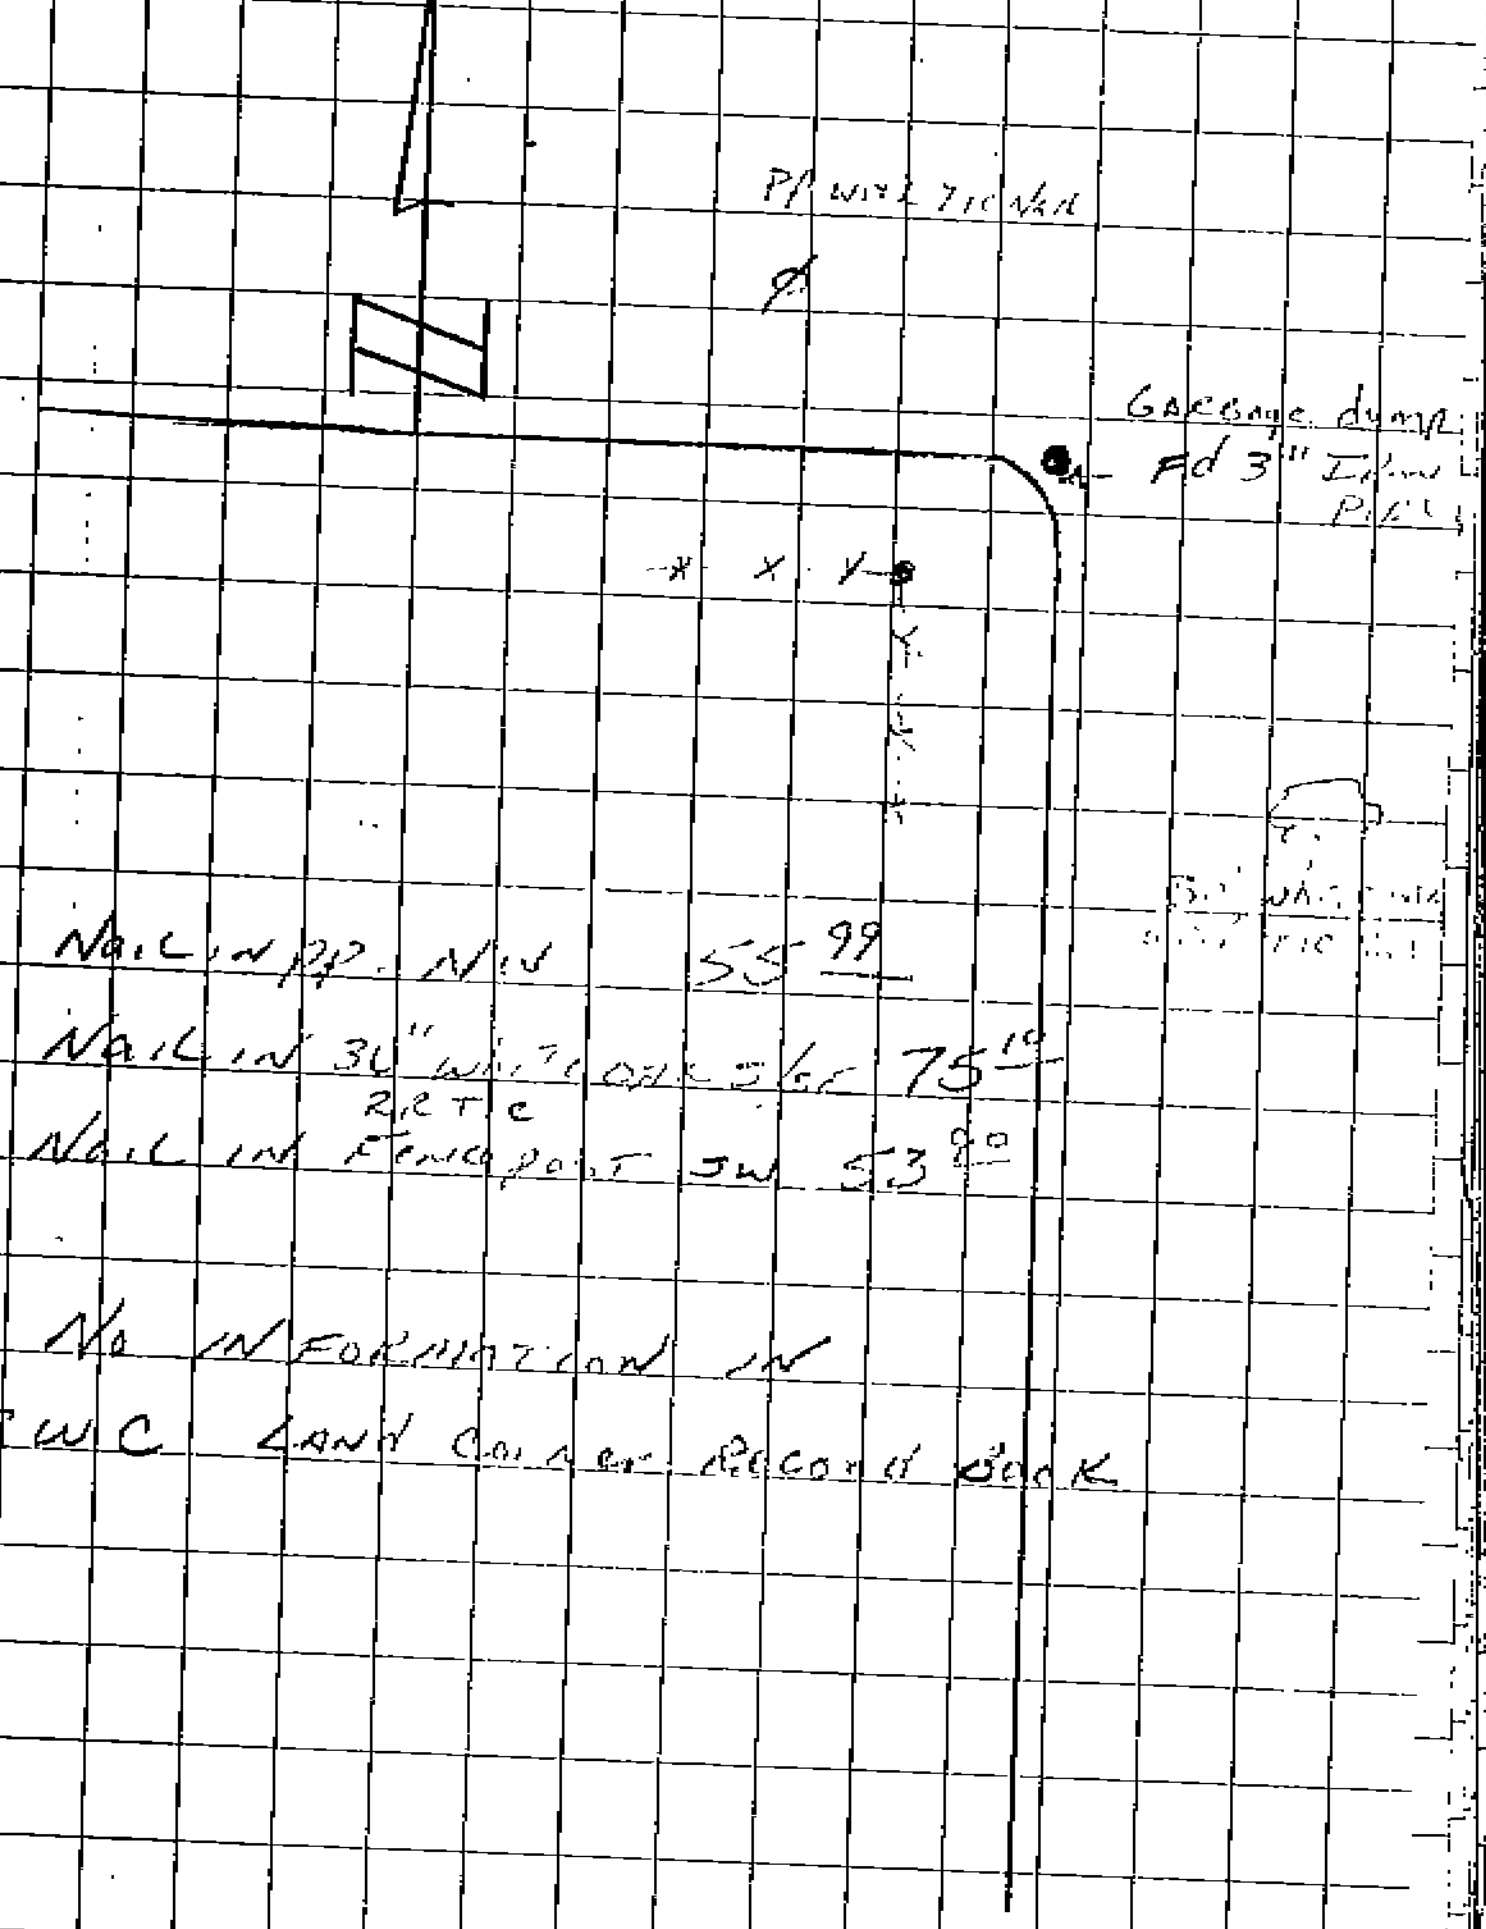

Nail in PP. NW 55^{99}
Nail in 30" white oak SE 75^{10}
RR Tie
Nail in Fencepost SW 53^{90}

No information in
CWC Land Corner Record Book

Sept 1, 1981
Tom Garlinghouse
Steve Blanick
Terry Savalgia

J-9

NW cor Sec 16-26-13
Corner common to
8-9 - 16-17

~~4~~
6

Time Spent 1 hour

Fd 1" Solid pin in ℄ Road on extended. Fence line going south 0.2 deep

Ties Nail in 14" Red Oak S/SE 41.60
Nail in Fence post South 29.26
Nail in 8" White Oak SW. 47.73

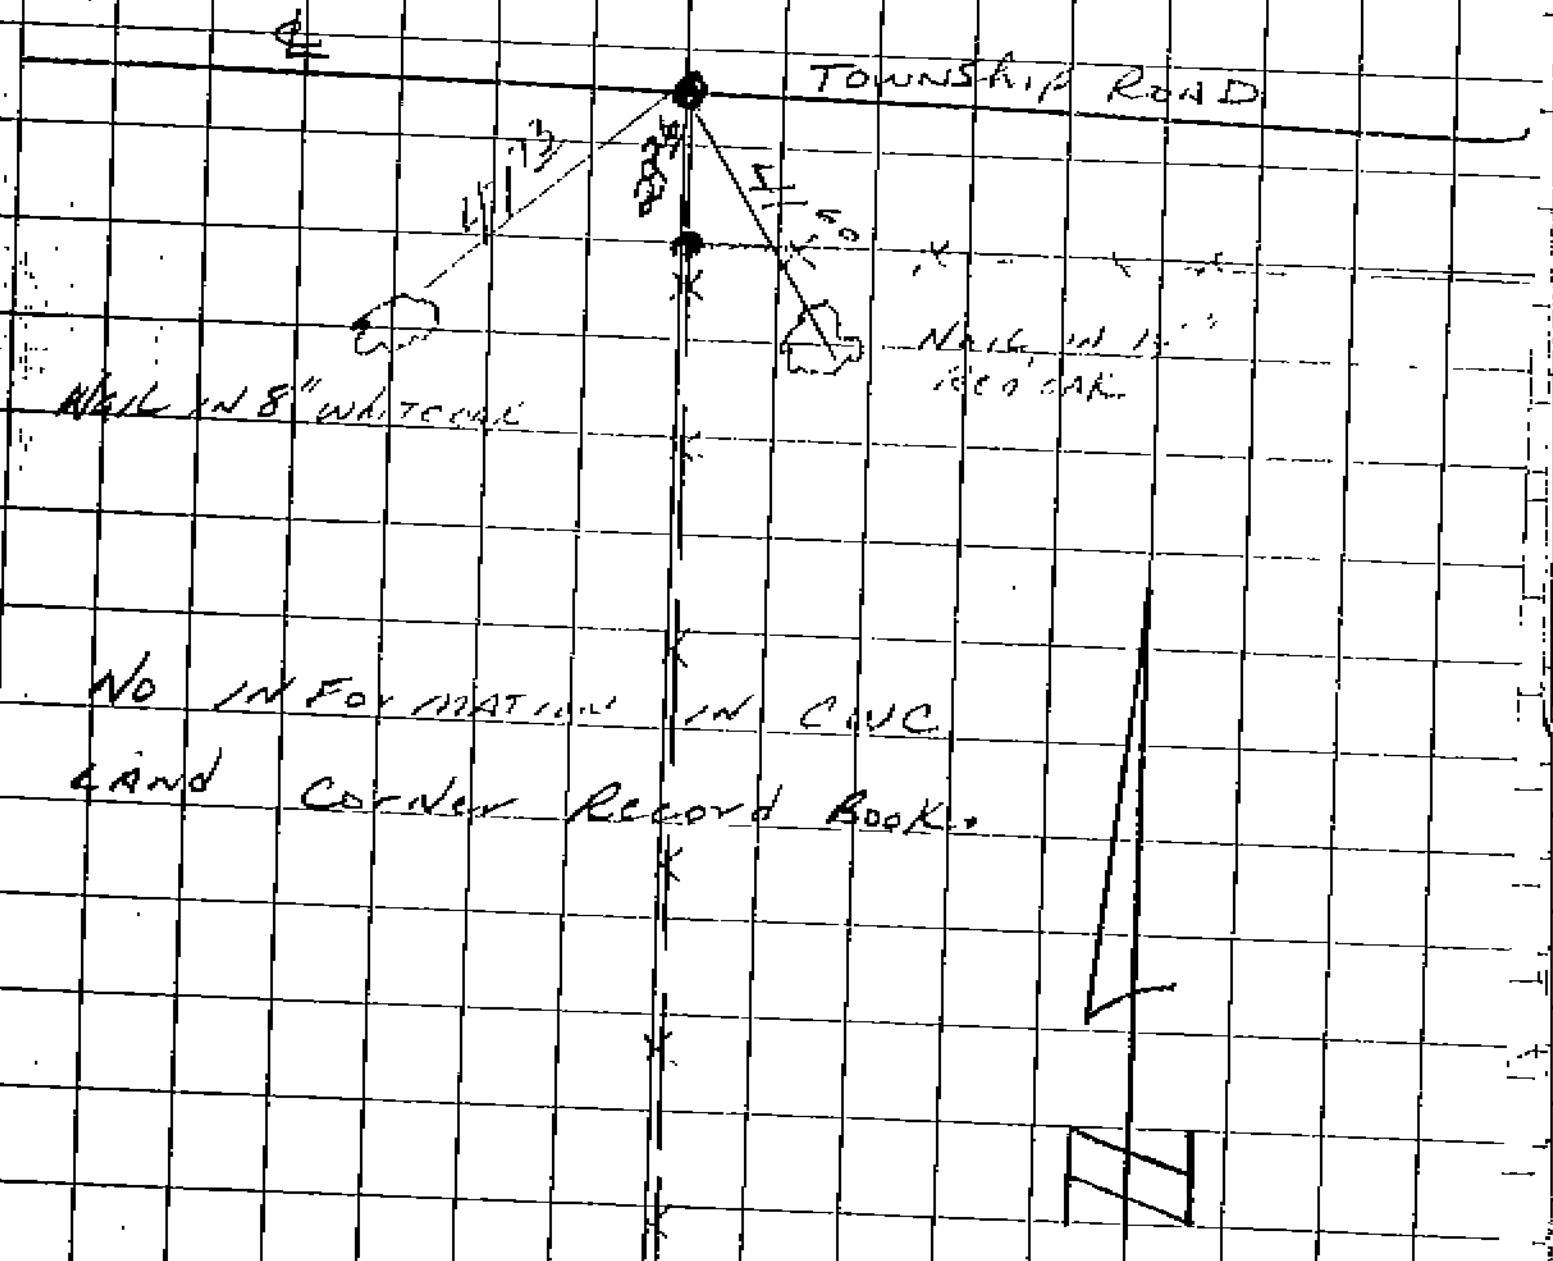

No information in CNC Land Corner Record Book.

Time Spent 1/2 hr — Sept 1, 1981
Tom Garlinghouse
Steve Blanick
Terry Savaloja

J-5

Ⓢ 7

NE Cor Sec 18-26-13-1⁄4

Ties to Corner Common To Sec 7-8-17-18

Nail in 18" White oak	South/SE	58^{80}
Nail in 16" Red oak	South west	32^{19}
Nail in Telephone pole	SE	36^{56}
Nail in power pole	NW	32^{40}

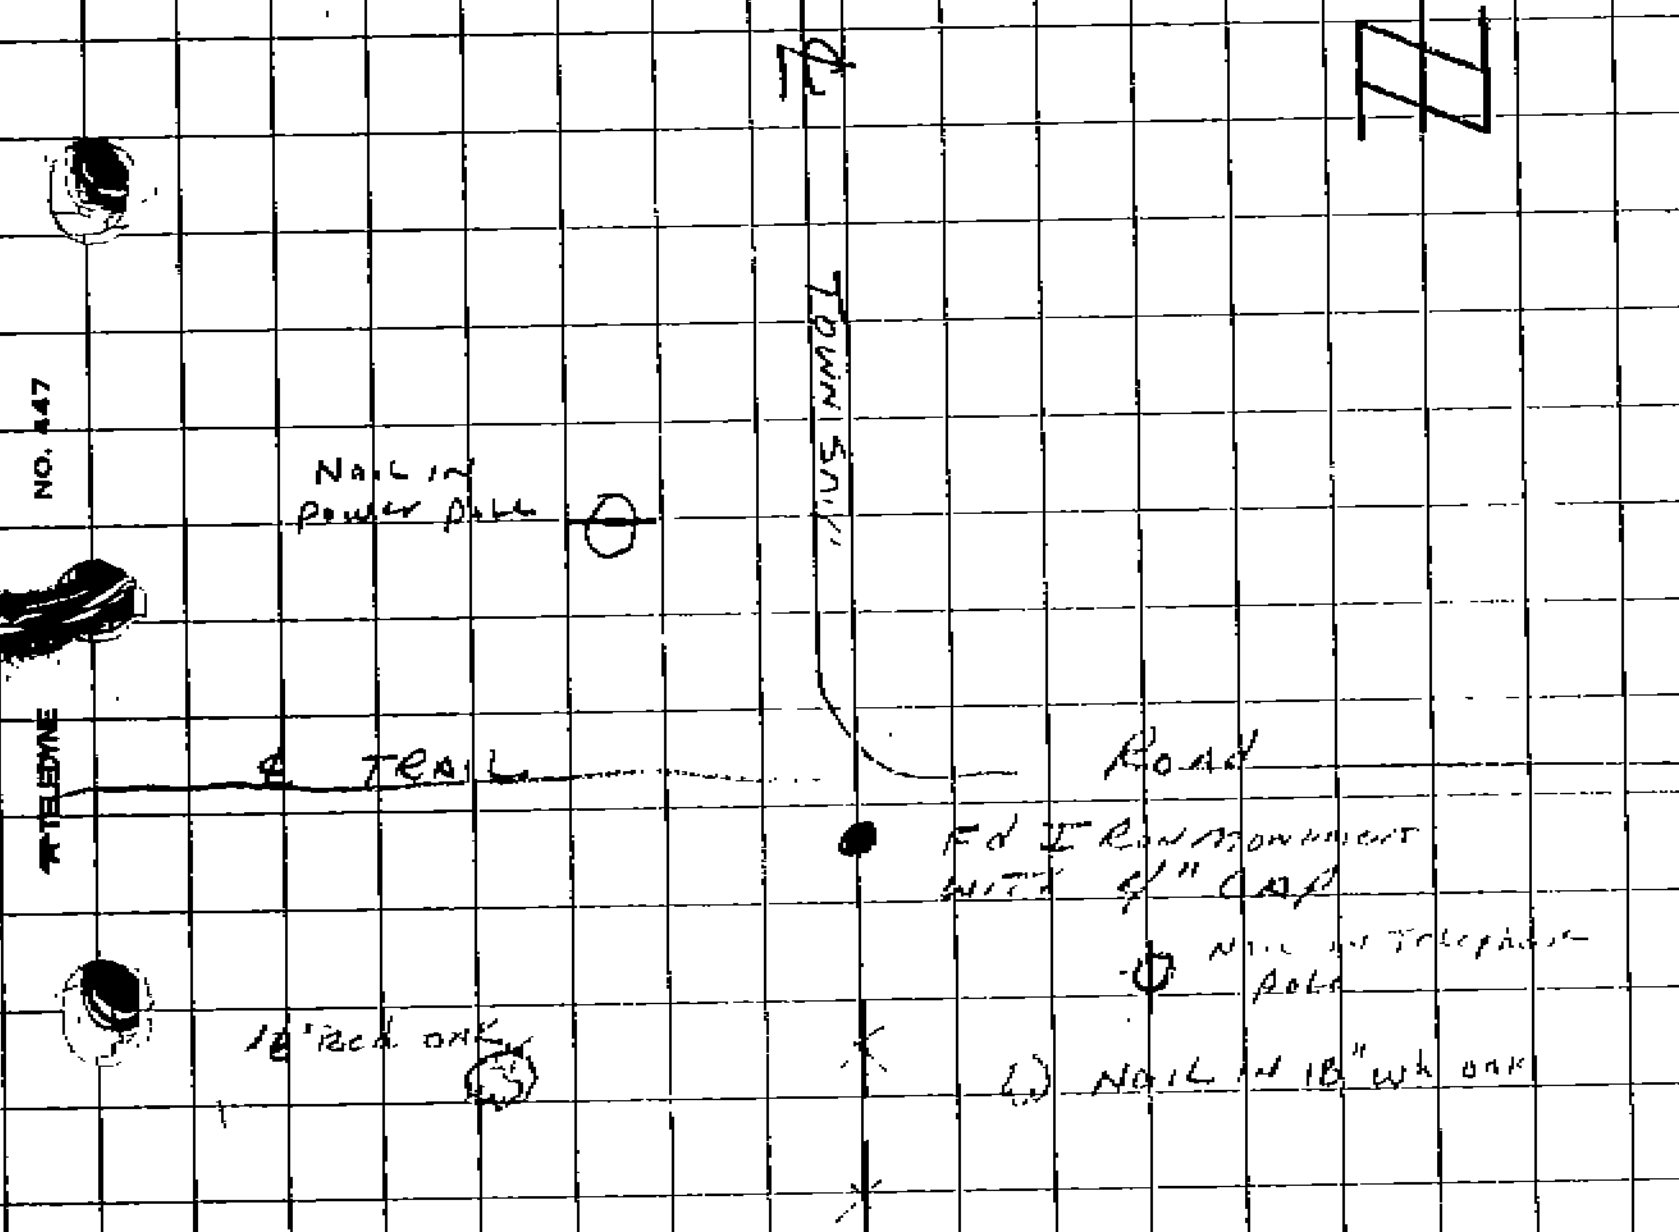

10" Aspen marked as line Corner in 1926
RK Whiteley set Corner at intersection
of old Blazed Lines made in 1926
1926 Louis [illegible] Fd as sec
Corner.

Searched 1/2 hour
J-7
Quarter corner Common to Sections 8-17-136-26

Sept 1, 1981
Tom Garlinghouse
~~Steve Blarick~~
Terry Savaloga

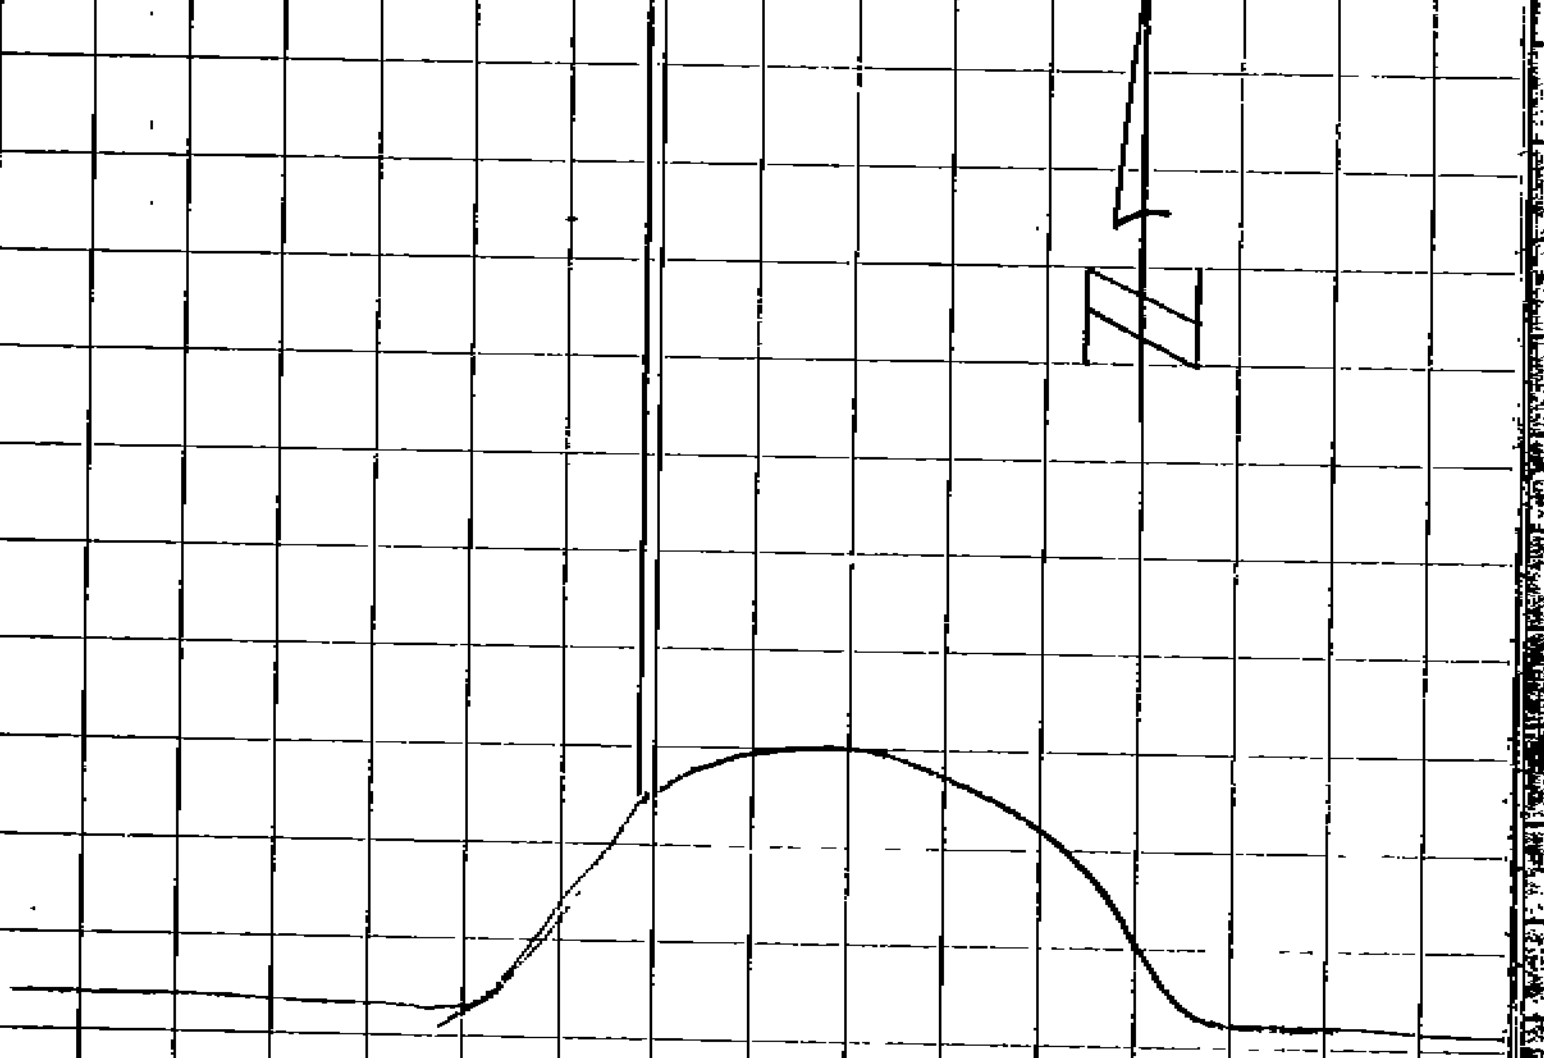

Searched for
Corner None Found
Area has been Graded
in past years

In 1863 a post was set @
This corner with BT'S
In 1906 RK Whiteley Reset
The post

NO. 447
TELEDYNE

Sept 1, 1981
Tom Garlinghouse
Steve Blanick
Terry Savaloja

N.E. Cor Section
3-136-26

A-17
Searched For 1 hour

Closing Corner Common To Sec 2-3-136-26
~~And Sec 34-35-137-26~~

No X-INDEX
HERE CLOSING
COR. TJB.

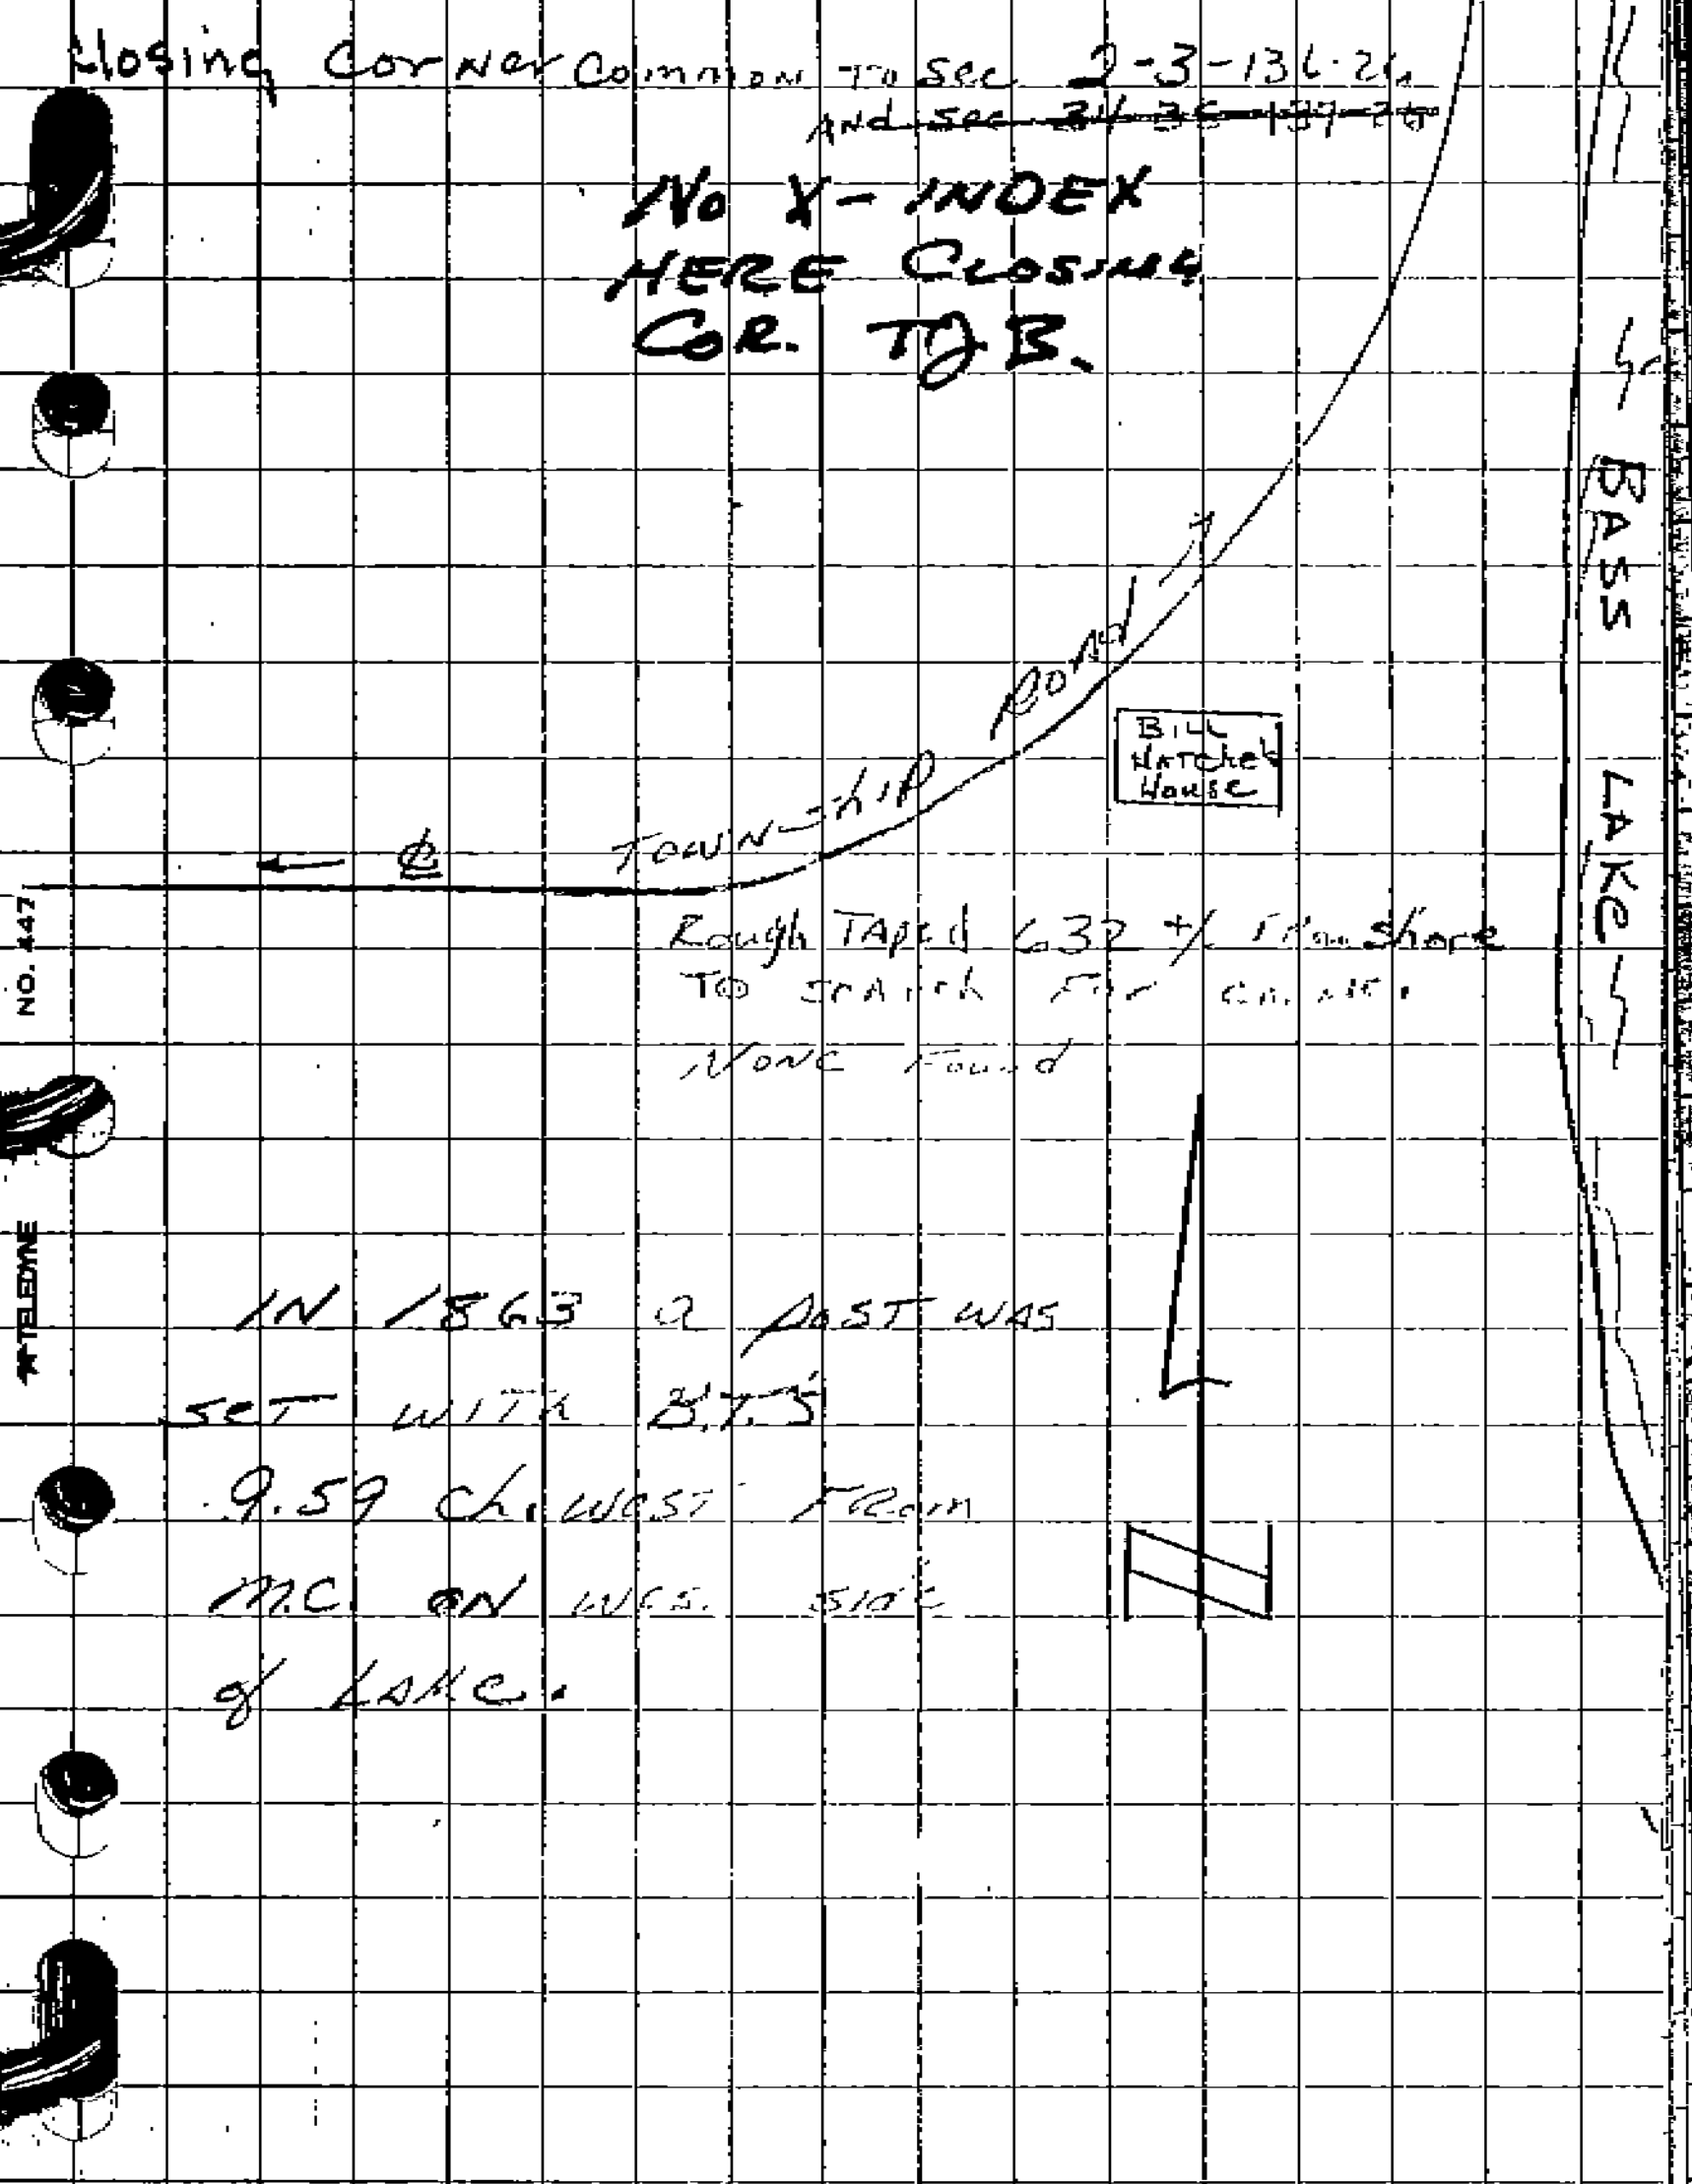

Rough Taped 632 +/ from Shore
To Search for corner
None Found

IN 1863 a post was
set with B.T.S
9.59 Ch. West From
M.C. on Wes. Side
of Lake.

NO. 447
TELEDYNE

Searched For | hour

C-9

September 1, 1981
Tom Garlinghouse
Steve Blanich
Terry Savaloja

~~⑧~~ 10

Quarter Corner Common To Sec 4-5-136-26

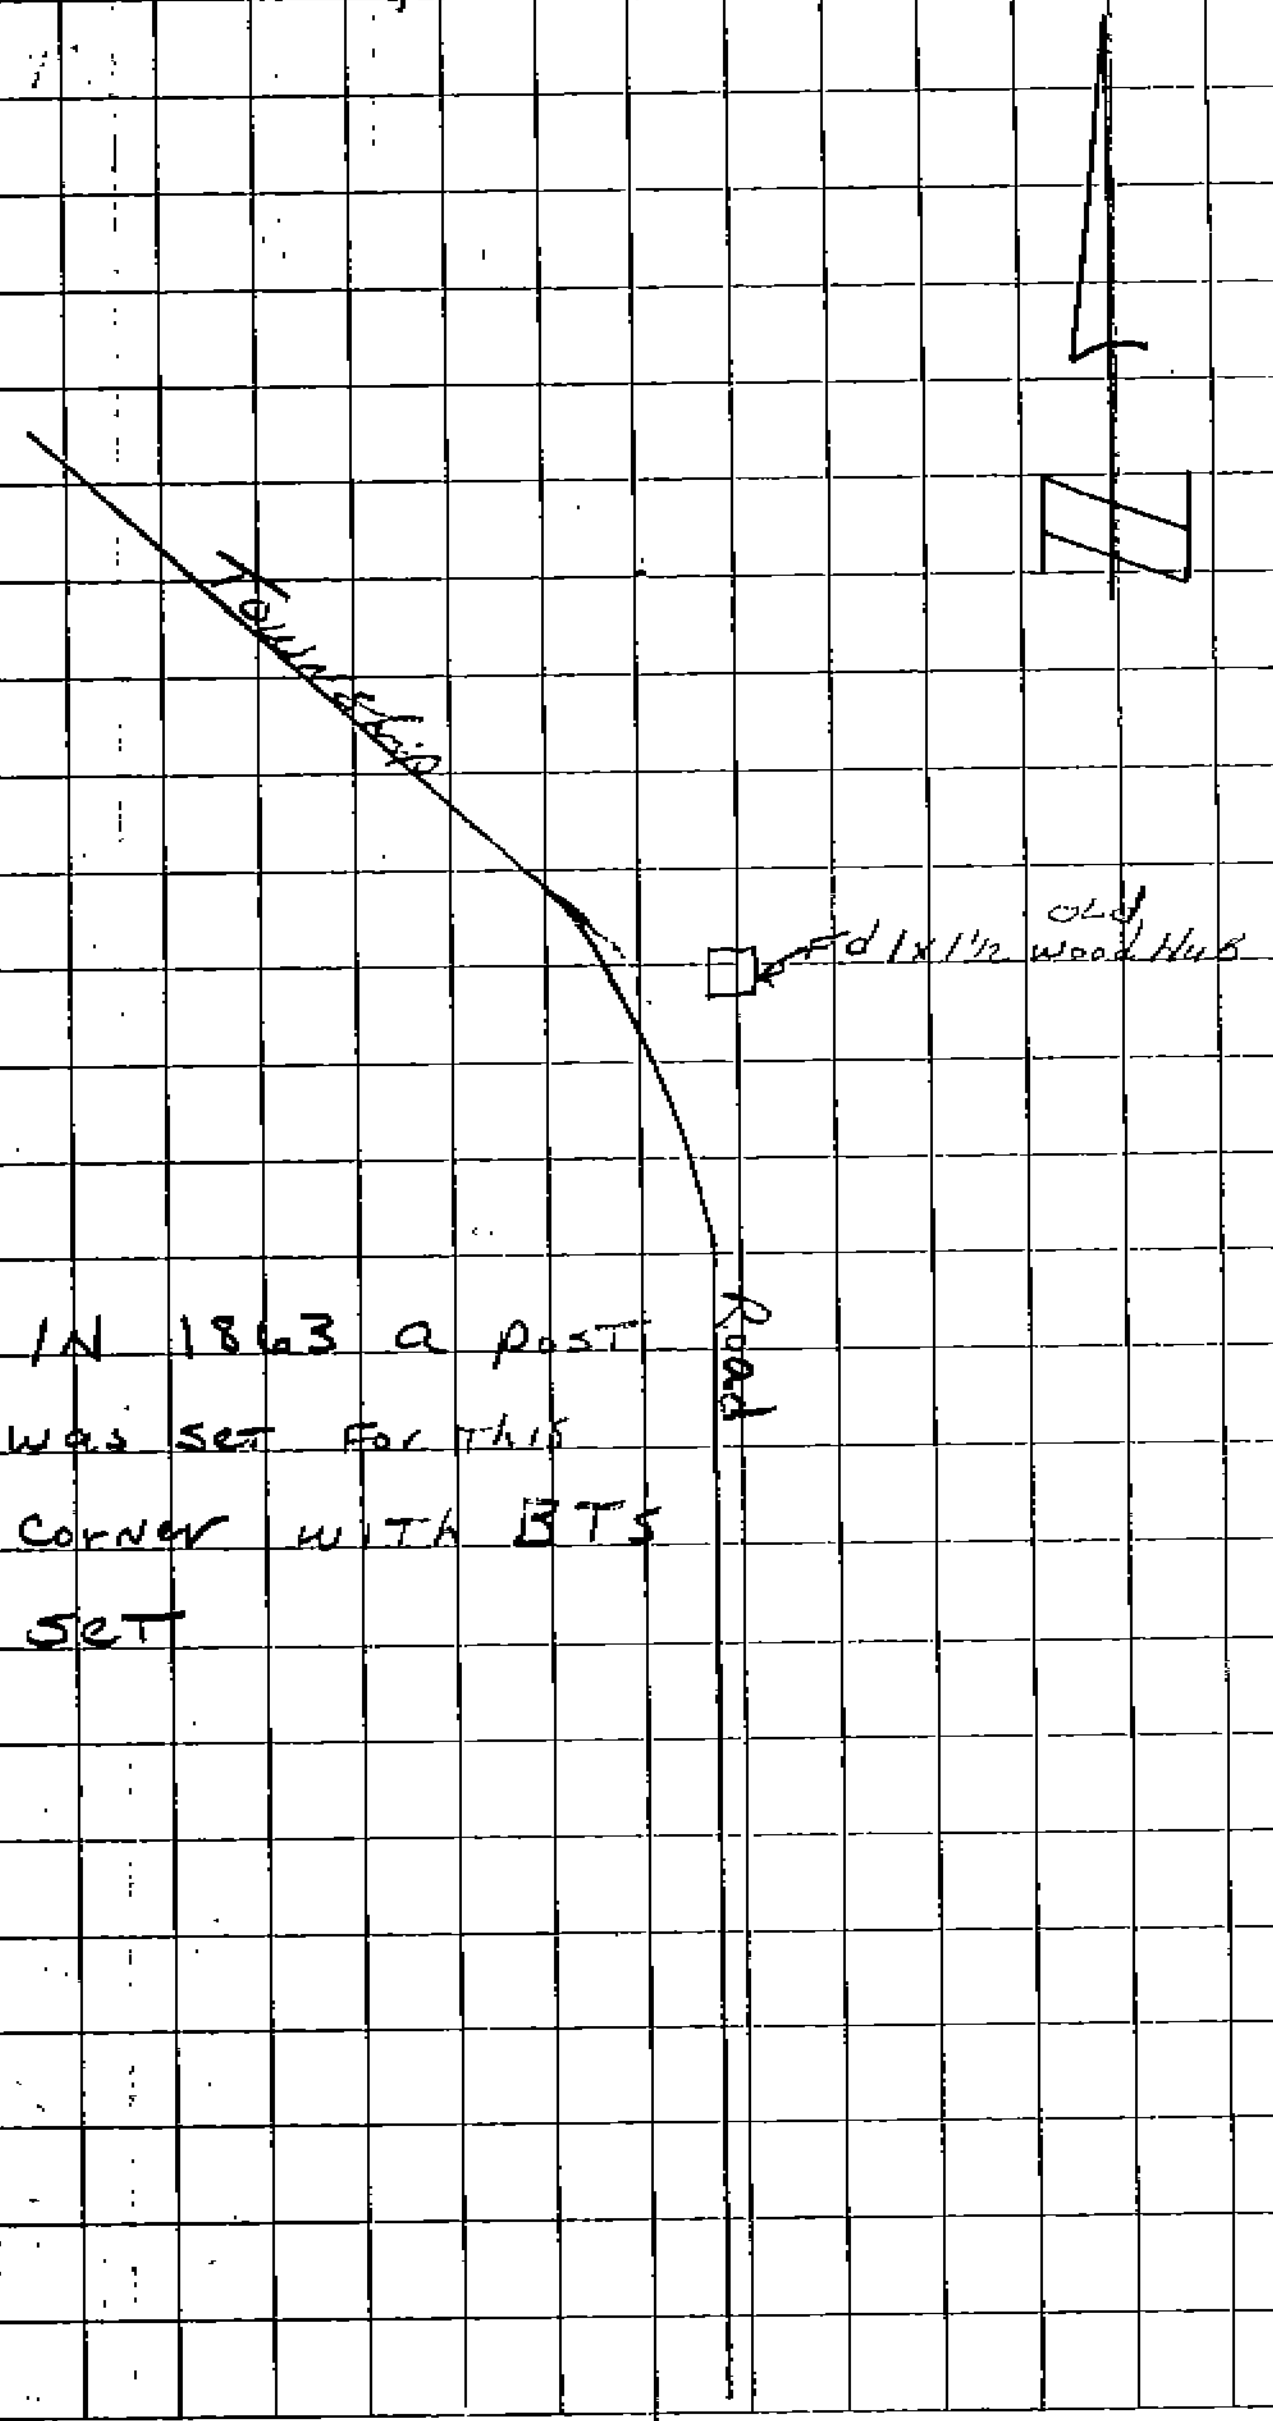

IN 1863 a post
was set for this
corner with BTS
set

Tom Garlinghouse
Steve Blanich
Terry Savaloja

Sept 1, 1981

Time spent 1 hour

R-11
N 1/4 cor Sec 28-T136-R26N
Quarter corner common to 21-28.

IN 1863 a post was set with BT's; Whiteley set a post for 1/4 corner in 1905. No new BT's.

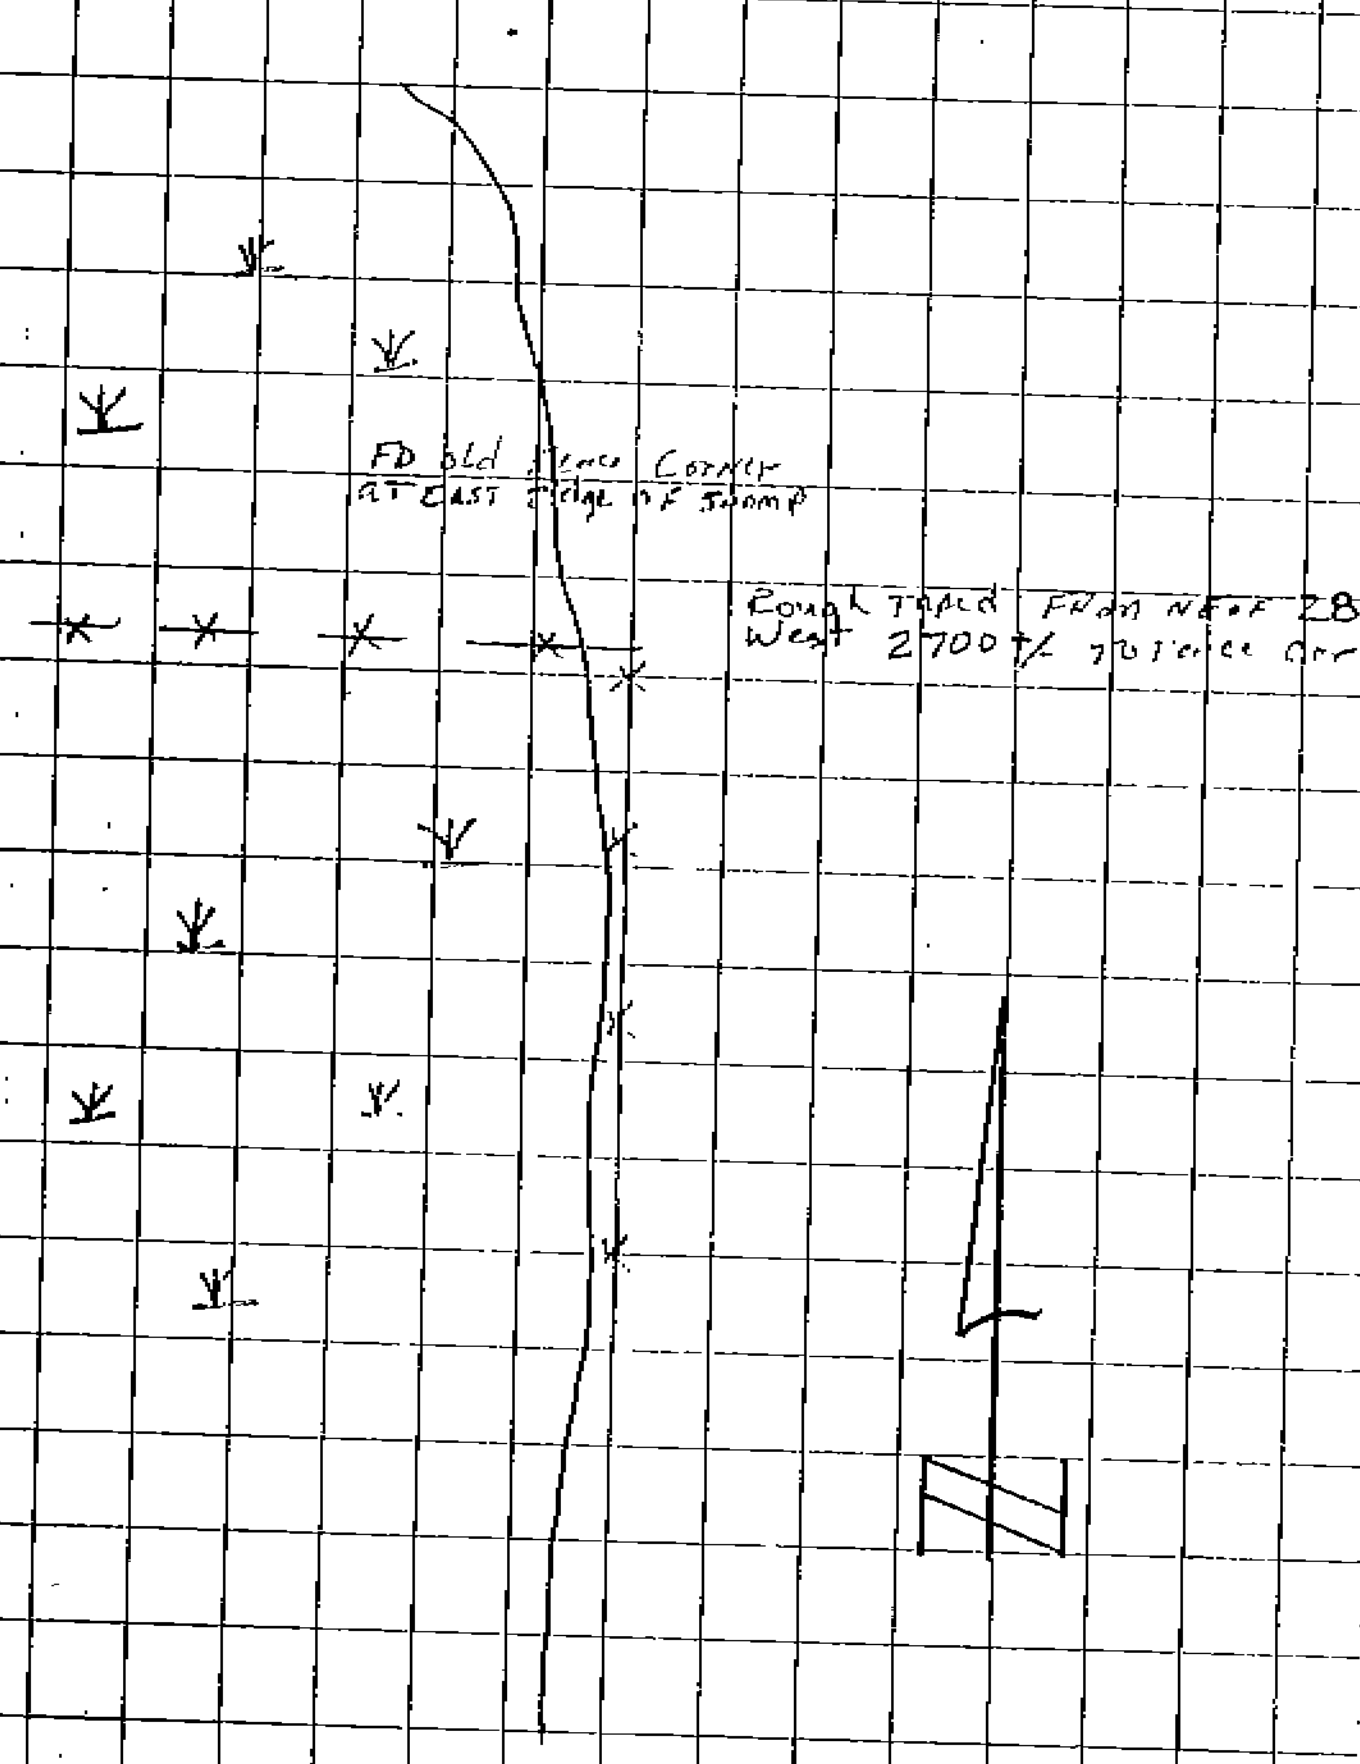

FD old fence corner at east edge of swamp

Rough taped from NE of 28 West 2700± to 1/4 cor

Sept 1, 1981
Tom Garlinghouse
Steve Blanich
Terry Savaloja

MC Common to
Sections 31-32- 26 . 136

~~10~~
W-X-5 12

Time spent 1/2 hour

In 1863 a post was
set for this cor. with
BT's set also.

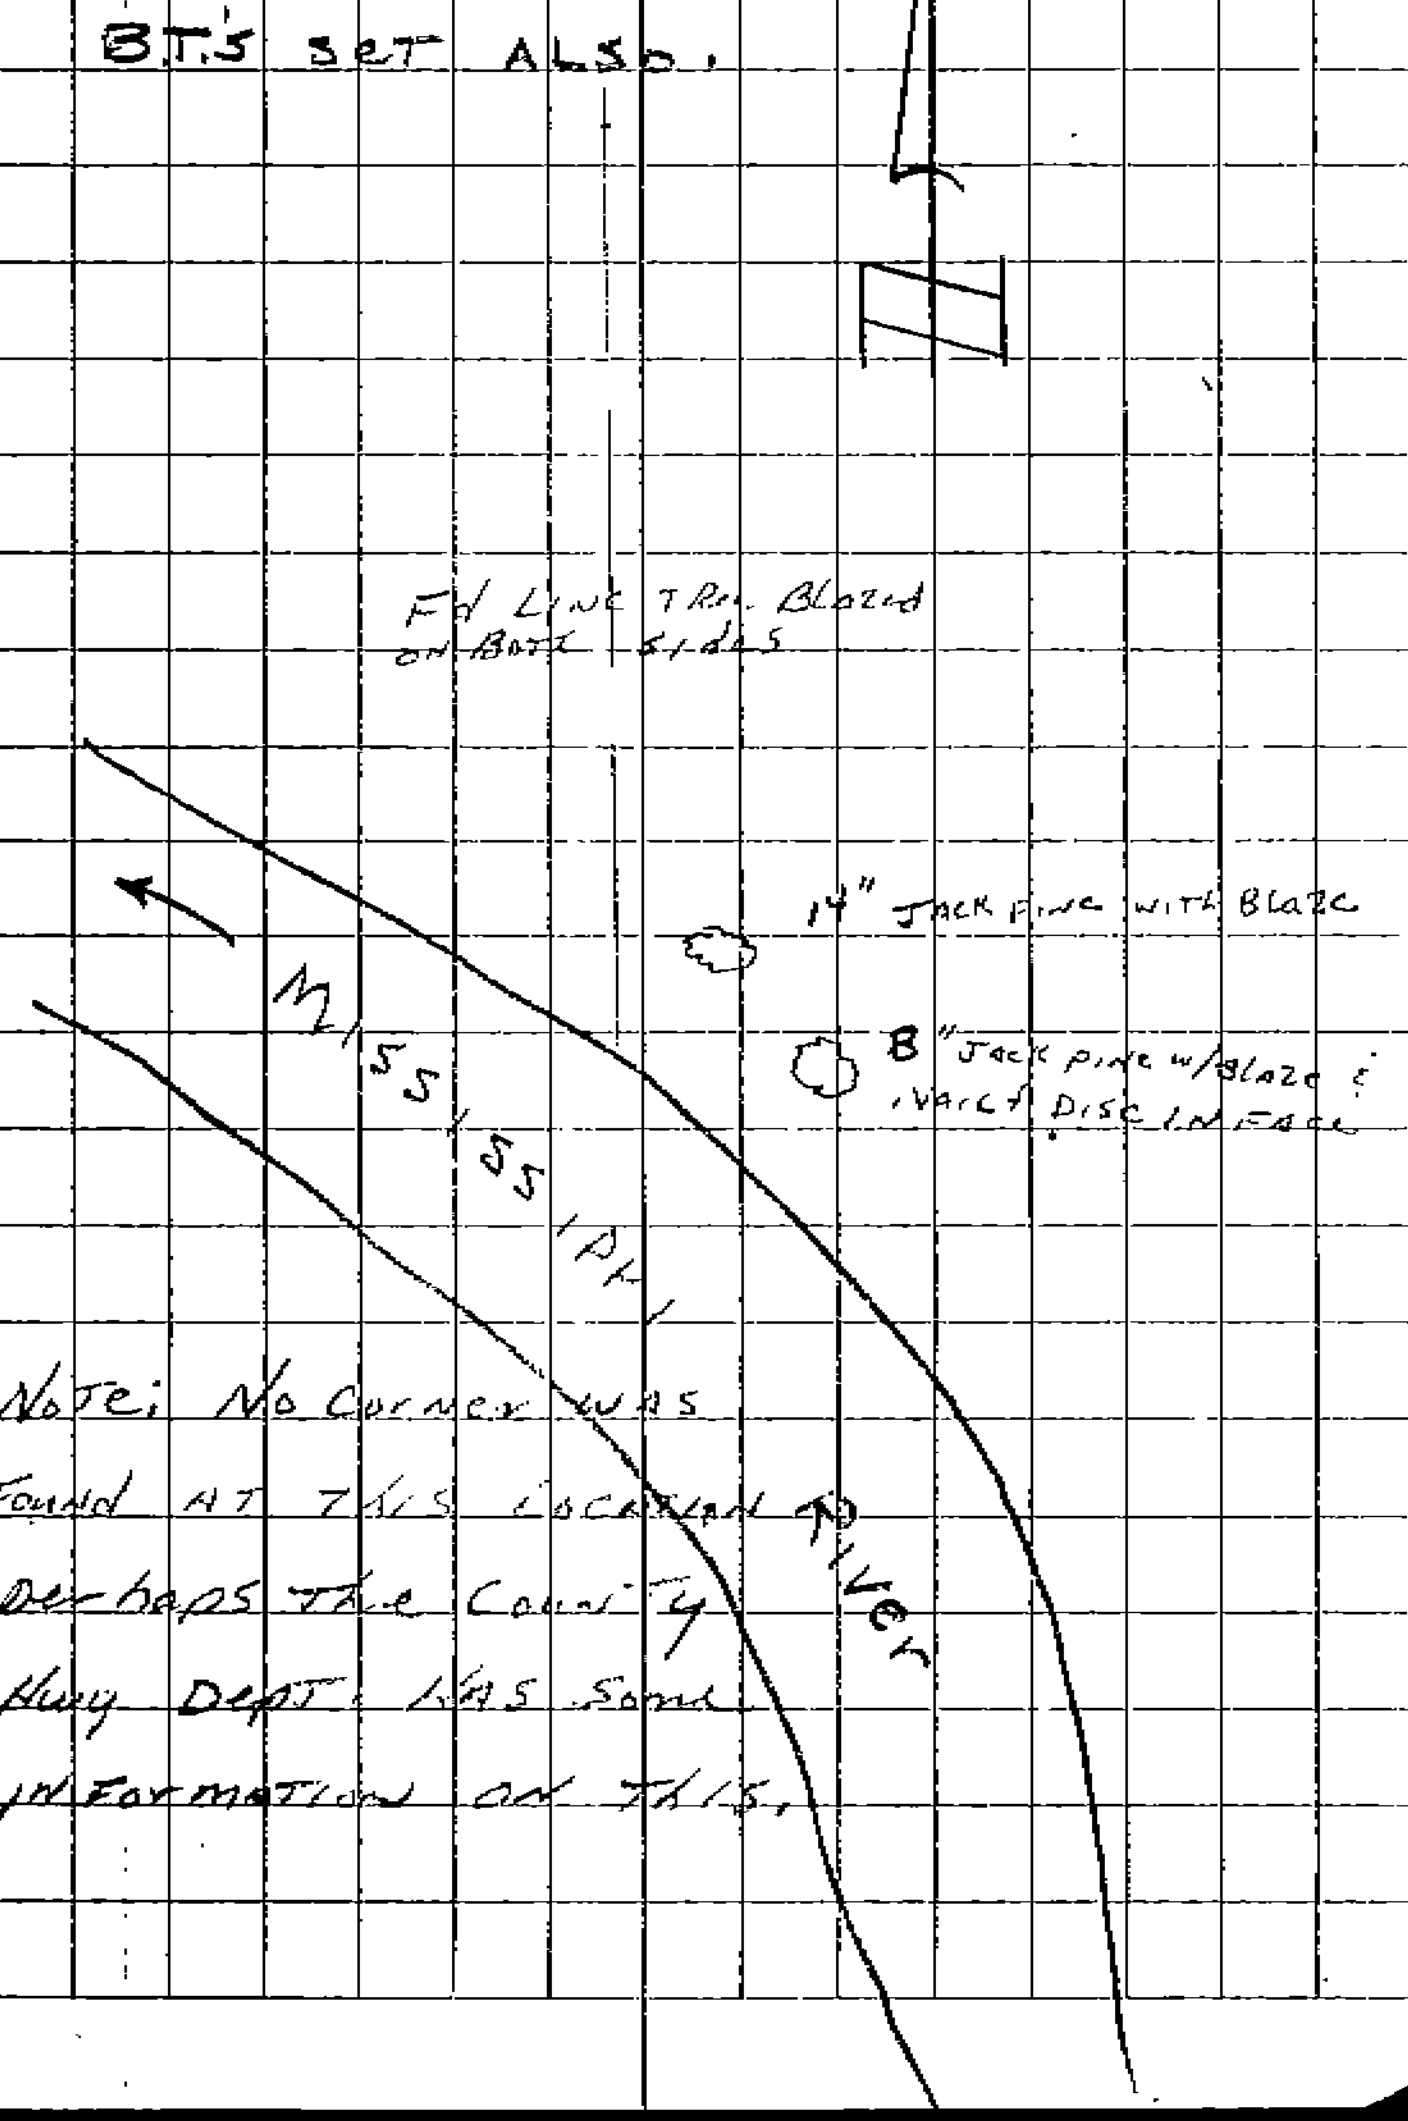
Fd Line Tre. Blazed on Both sides
14" Jack Pine with Blaze
8" Jack pine w/Blaze & Nail Disc in Face
Mississippi River

Note: No Corner was
found at this location
perhaps the County
Hwy Dept. has some
information on this.

MC, Between Sections
35 & 36 T136N R26W

W-X-21

Sept 10, 1981

Tom Garlinghouse
Steve Blawich
Terry Savaloja

Time spent 1 hour

13

Fd 1" Solid pin 1' Above Ground

Nail in 14" white oak	NW 50°	$10^{\underline{86}}$
Nail in 20" white oak	NE 40°	$27^{\underline{8}}$
Nail in 14" white oak	East	$11^{\underline{60}}$

26' South to River

All Three Tie Nails 1' Above Ground

In 1863 a 4" white Elm was marked
For This Corner — No B.T.'s

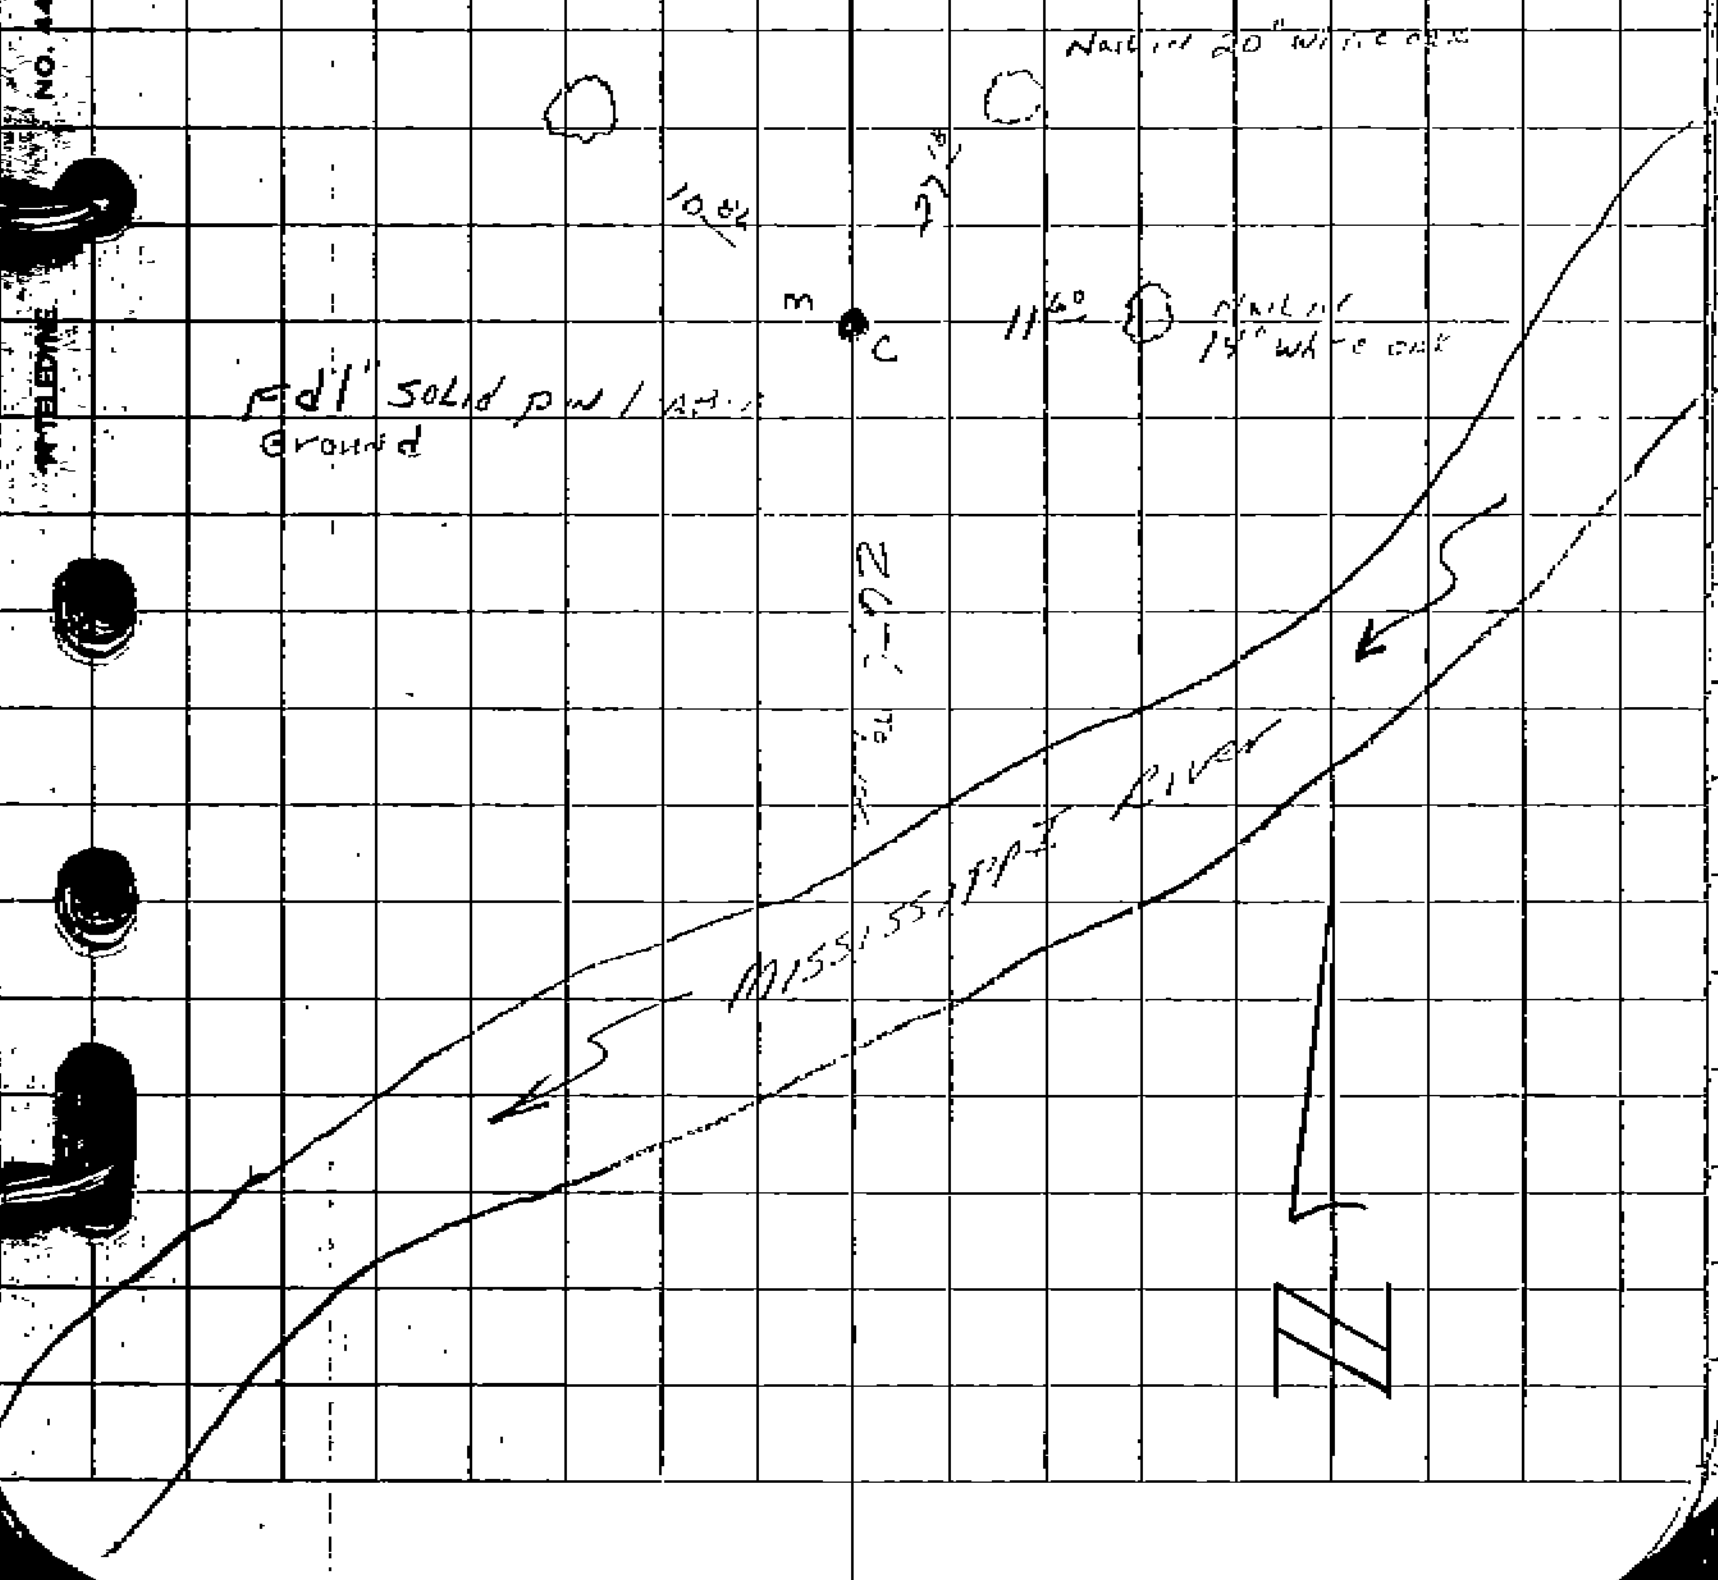

~~V-21~~ V-21

Tom Garlinghouse,
Steve Blanich
Terry Savaloja
Sept 10, 1981

Section corner common to
Sections 25-26-35-36 Twp 136-26

In 1863 a post was set for this corner with B.T.'s

In 1915 Lours Knudson found BT's in good order.

Time Spent 1½ hour

Nail in 4" Ash	S 40 E	13.15
Nail in 6" Basswood	N 30 E	8.35
Nail in 6" White Oak	West	17.08

Found 2" pipe in place with brass cap with "X" on top yellow paint.

Note: Talk to Dr Savaloja at county [illegible]
He might know more about this corner

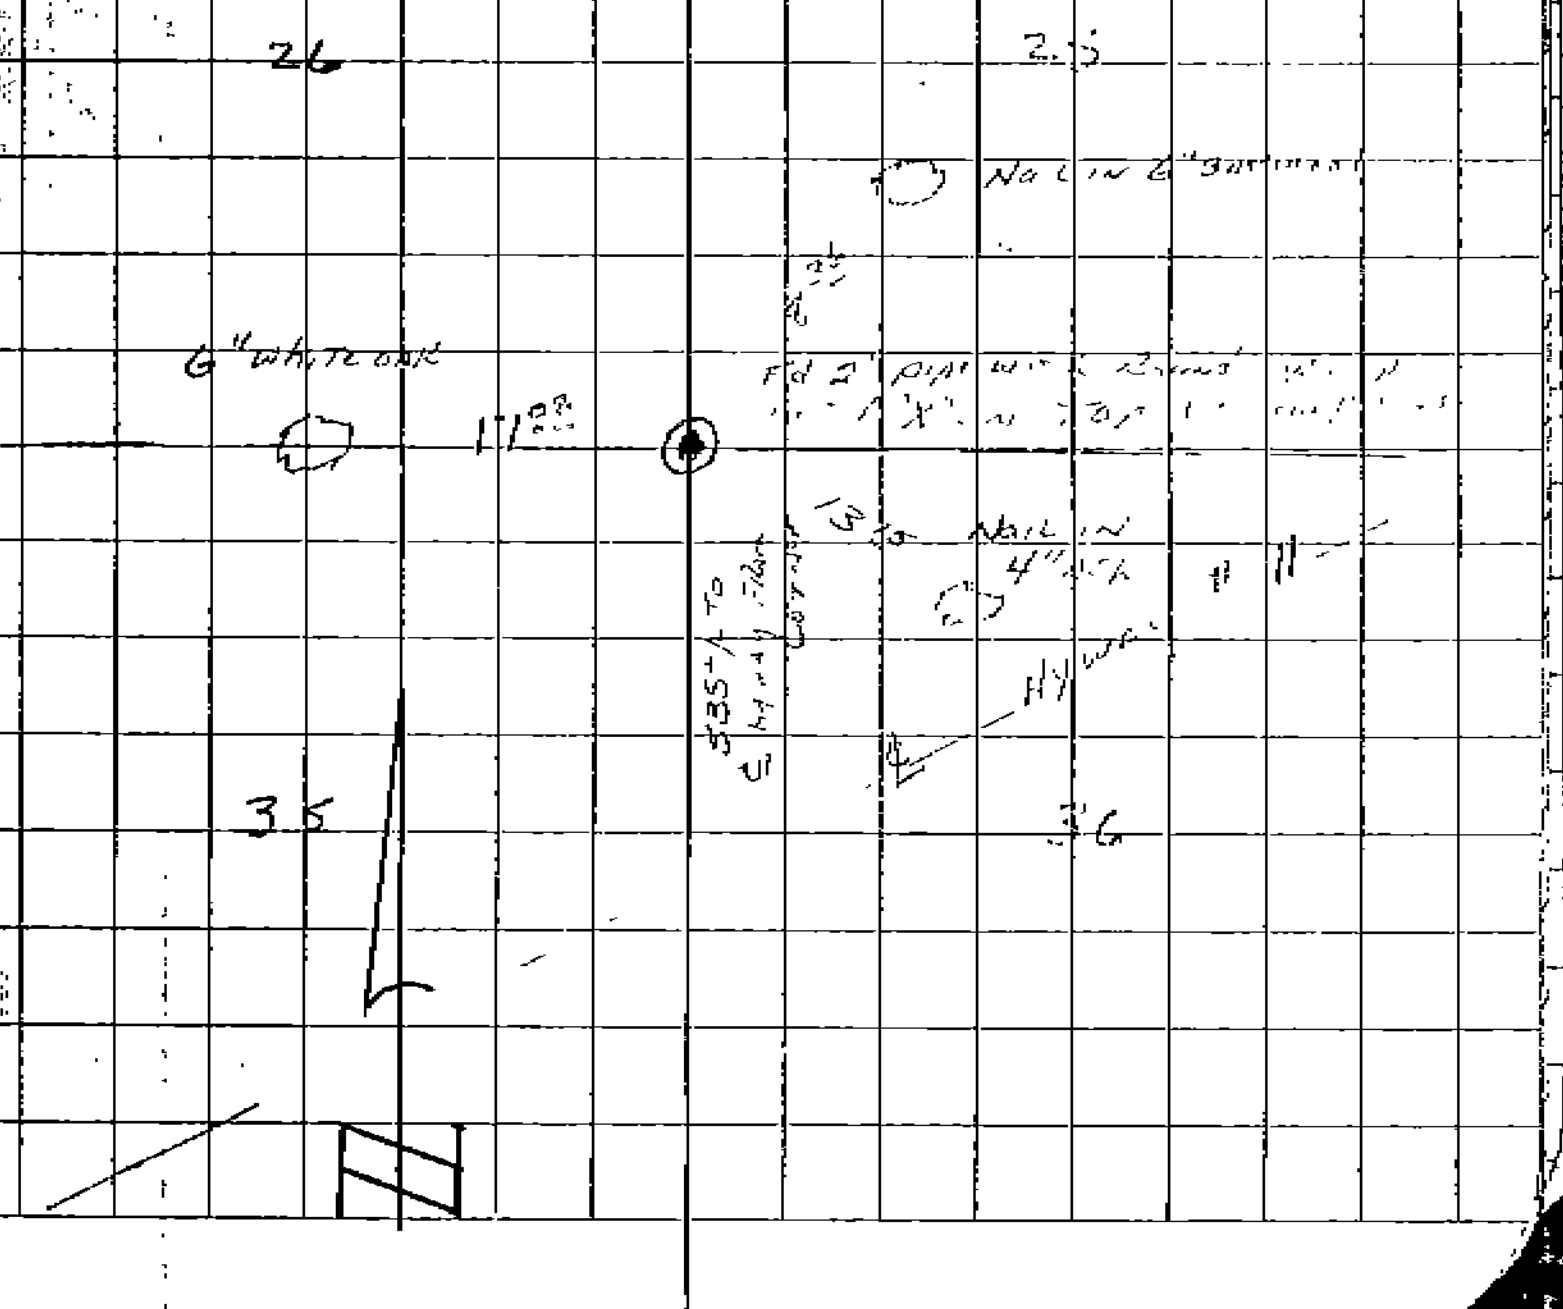

MC Common To Sections
25 & 36 Township 136 R26W

V-22-23

Tom Garlinghouse
Steve Blanick
Terry Savaloja
Sept 10, 1981
Time Spent 1 hour

~~13~~ 15

IN 1863 a Post WAS SET AT
This Corner With B.T.'s
7" Aspen S32E 8 LK's 5" Birch S31 W 11 LK

1" Solid pin $0^{\underline{2}}$ Above Grd

Nail in 6" Basswood N80W. $8^{\underline{18}}$

Nail in 4" white pine N35W $12^{\underline{69}}$

Nail in 8" white oak N40E $20^{\underline{85}}$

Edge of " " 68' East

Edge of Bank 74' South Add 10' to water in River

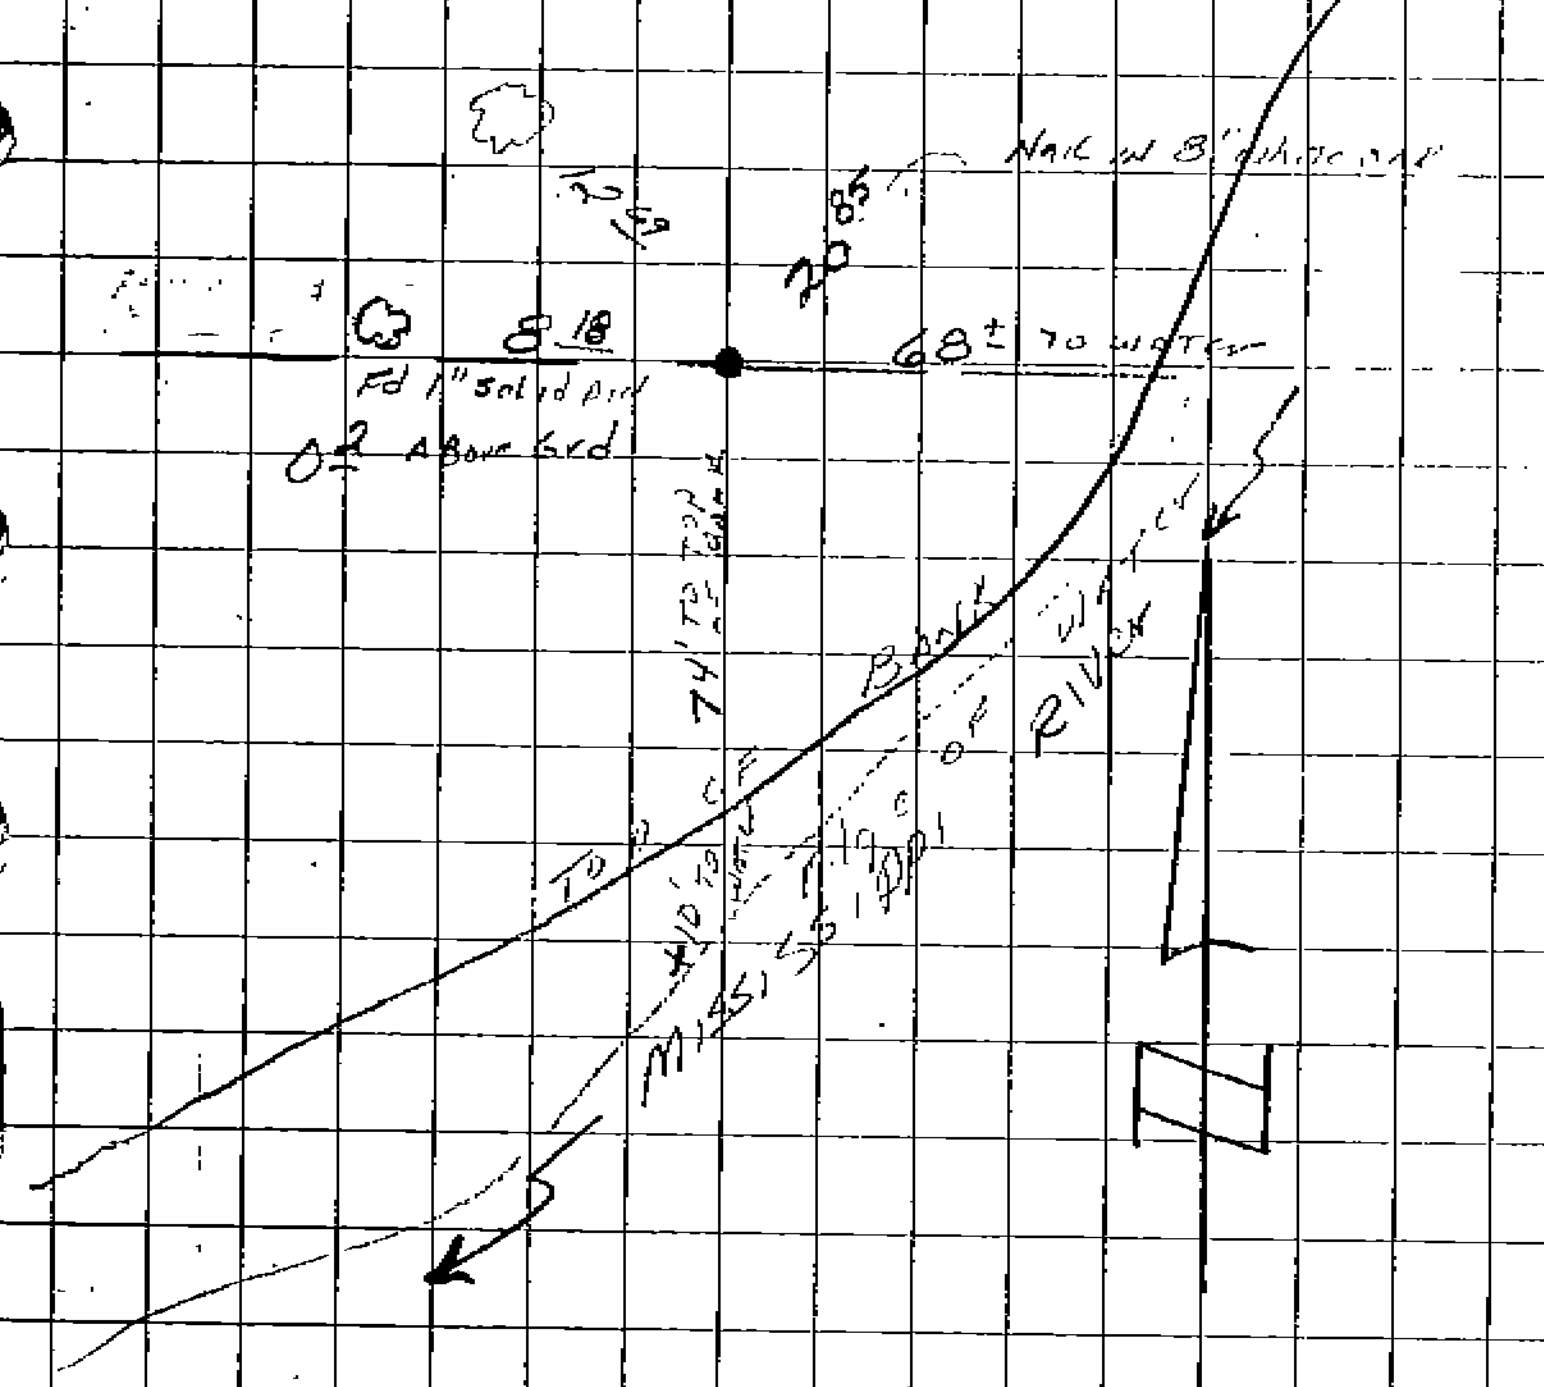

Section Corner Common
To Sections 28-29-32-33
T136N R26W
V-9
Time Spent 1¼ hour

Tom Garlinghouse
Terry Savalosta
Steve Blanich
Sept 10, 1981

~~14~~ 16

Searched for Corner None Found
In 1863 a post was set with B.T.'s marked
In 1934 Ronkin fd post in place
And marked Two Brg Trees
10" Oak S 30 E 47.7
14" Oak N 30 E 49.9

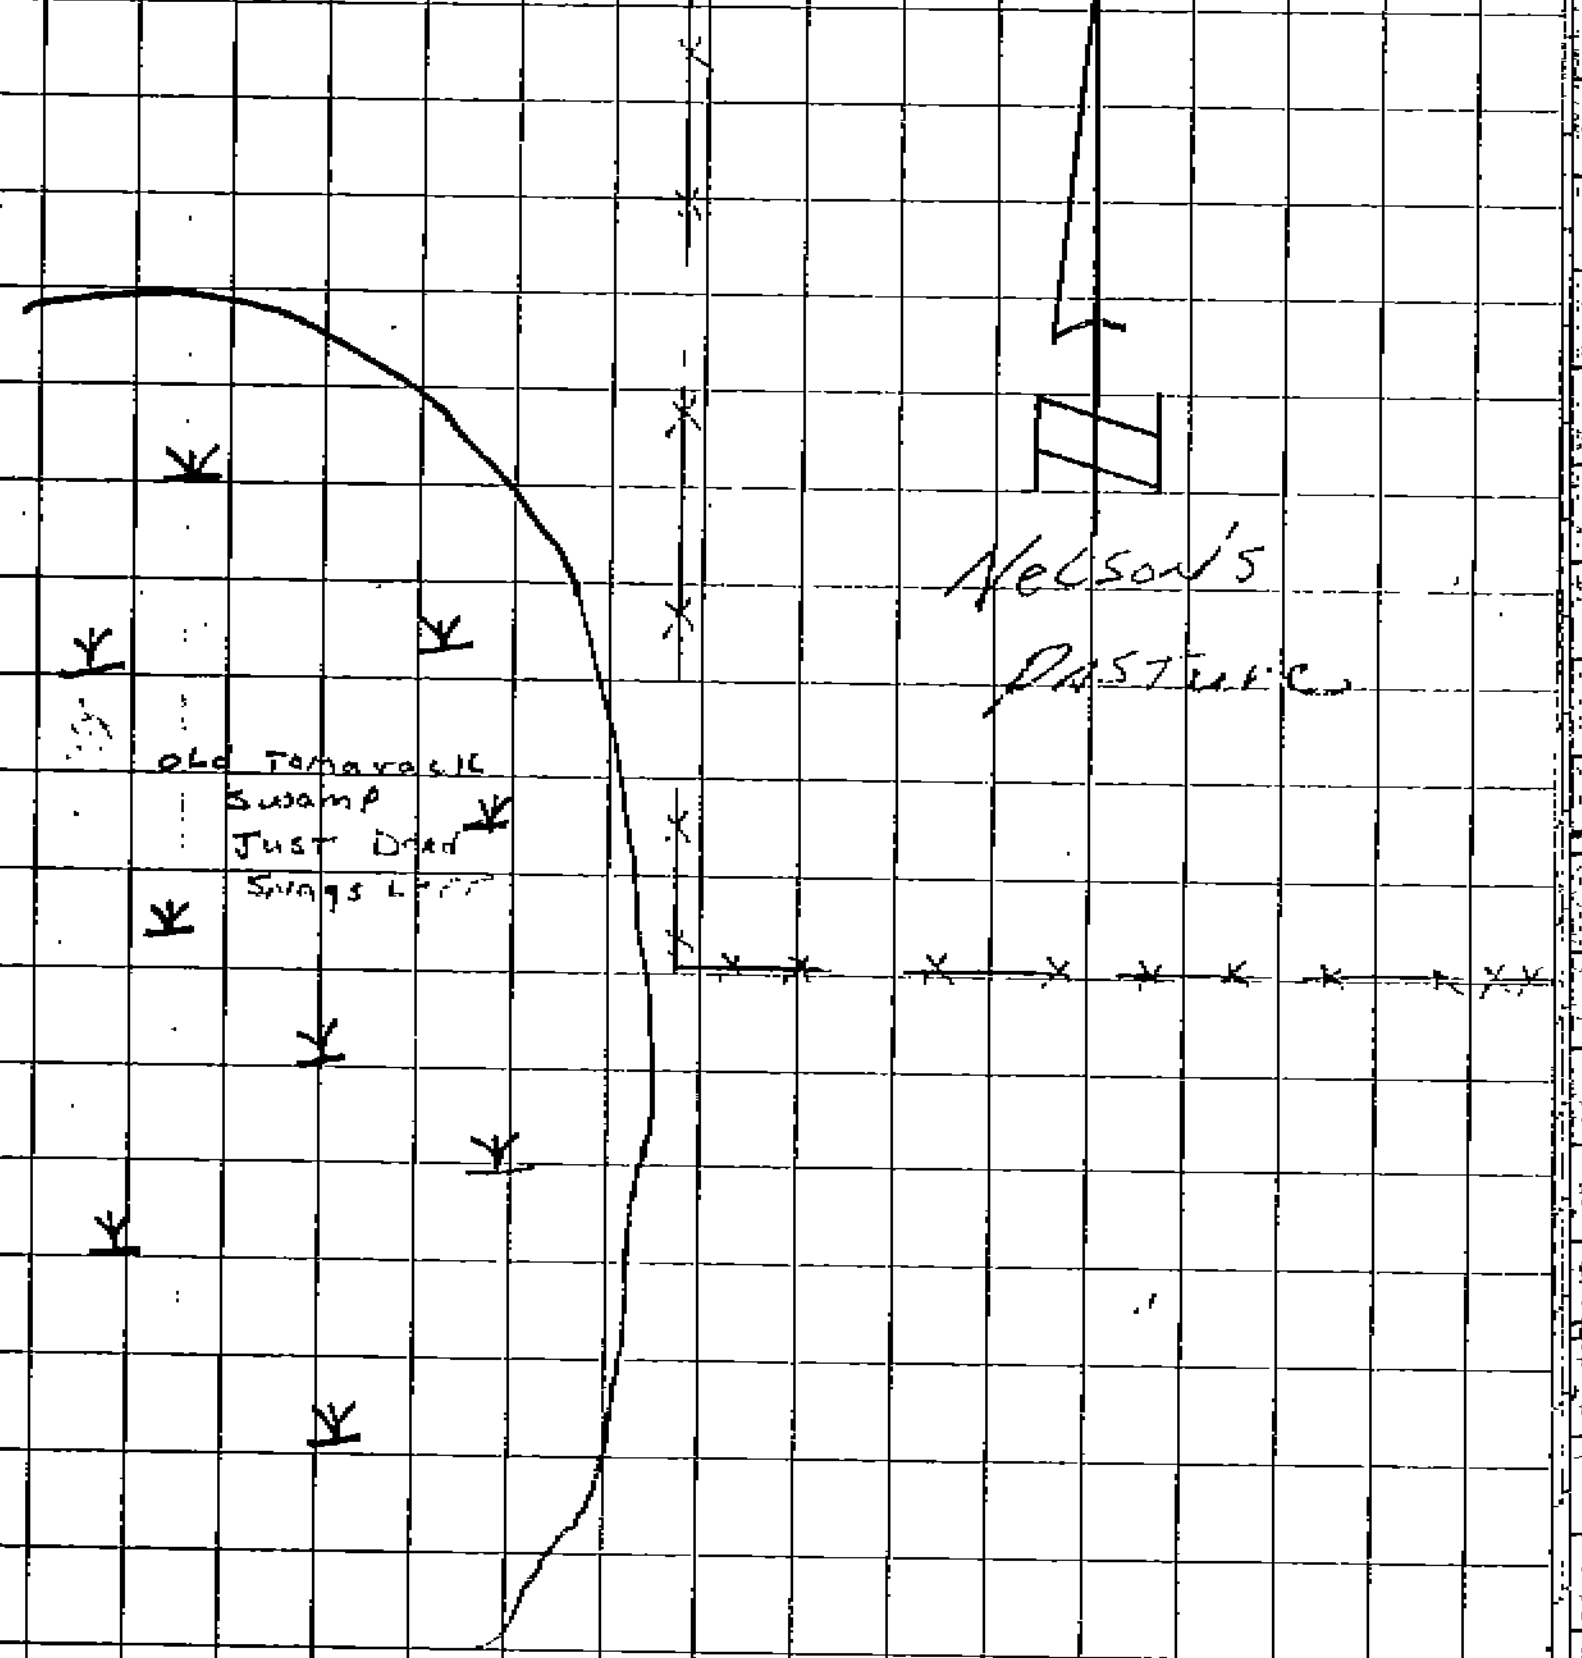

Searched For 1/4 cor common To Sec 28 & 33 T136-R26W
V-11

Tom Garlinghouse.
Steve Filanci,
Terry Saunatya
Sept 10, 1981

(LS)

17

Time spent ½ hour

IN 1863 a post was set with BT's marked -

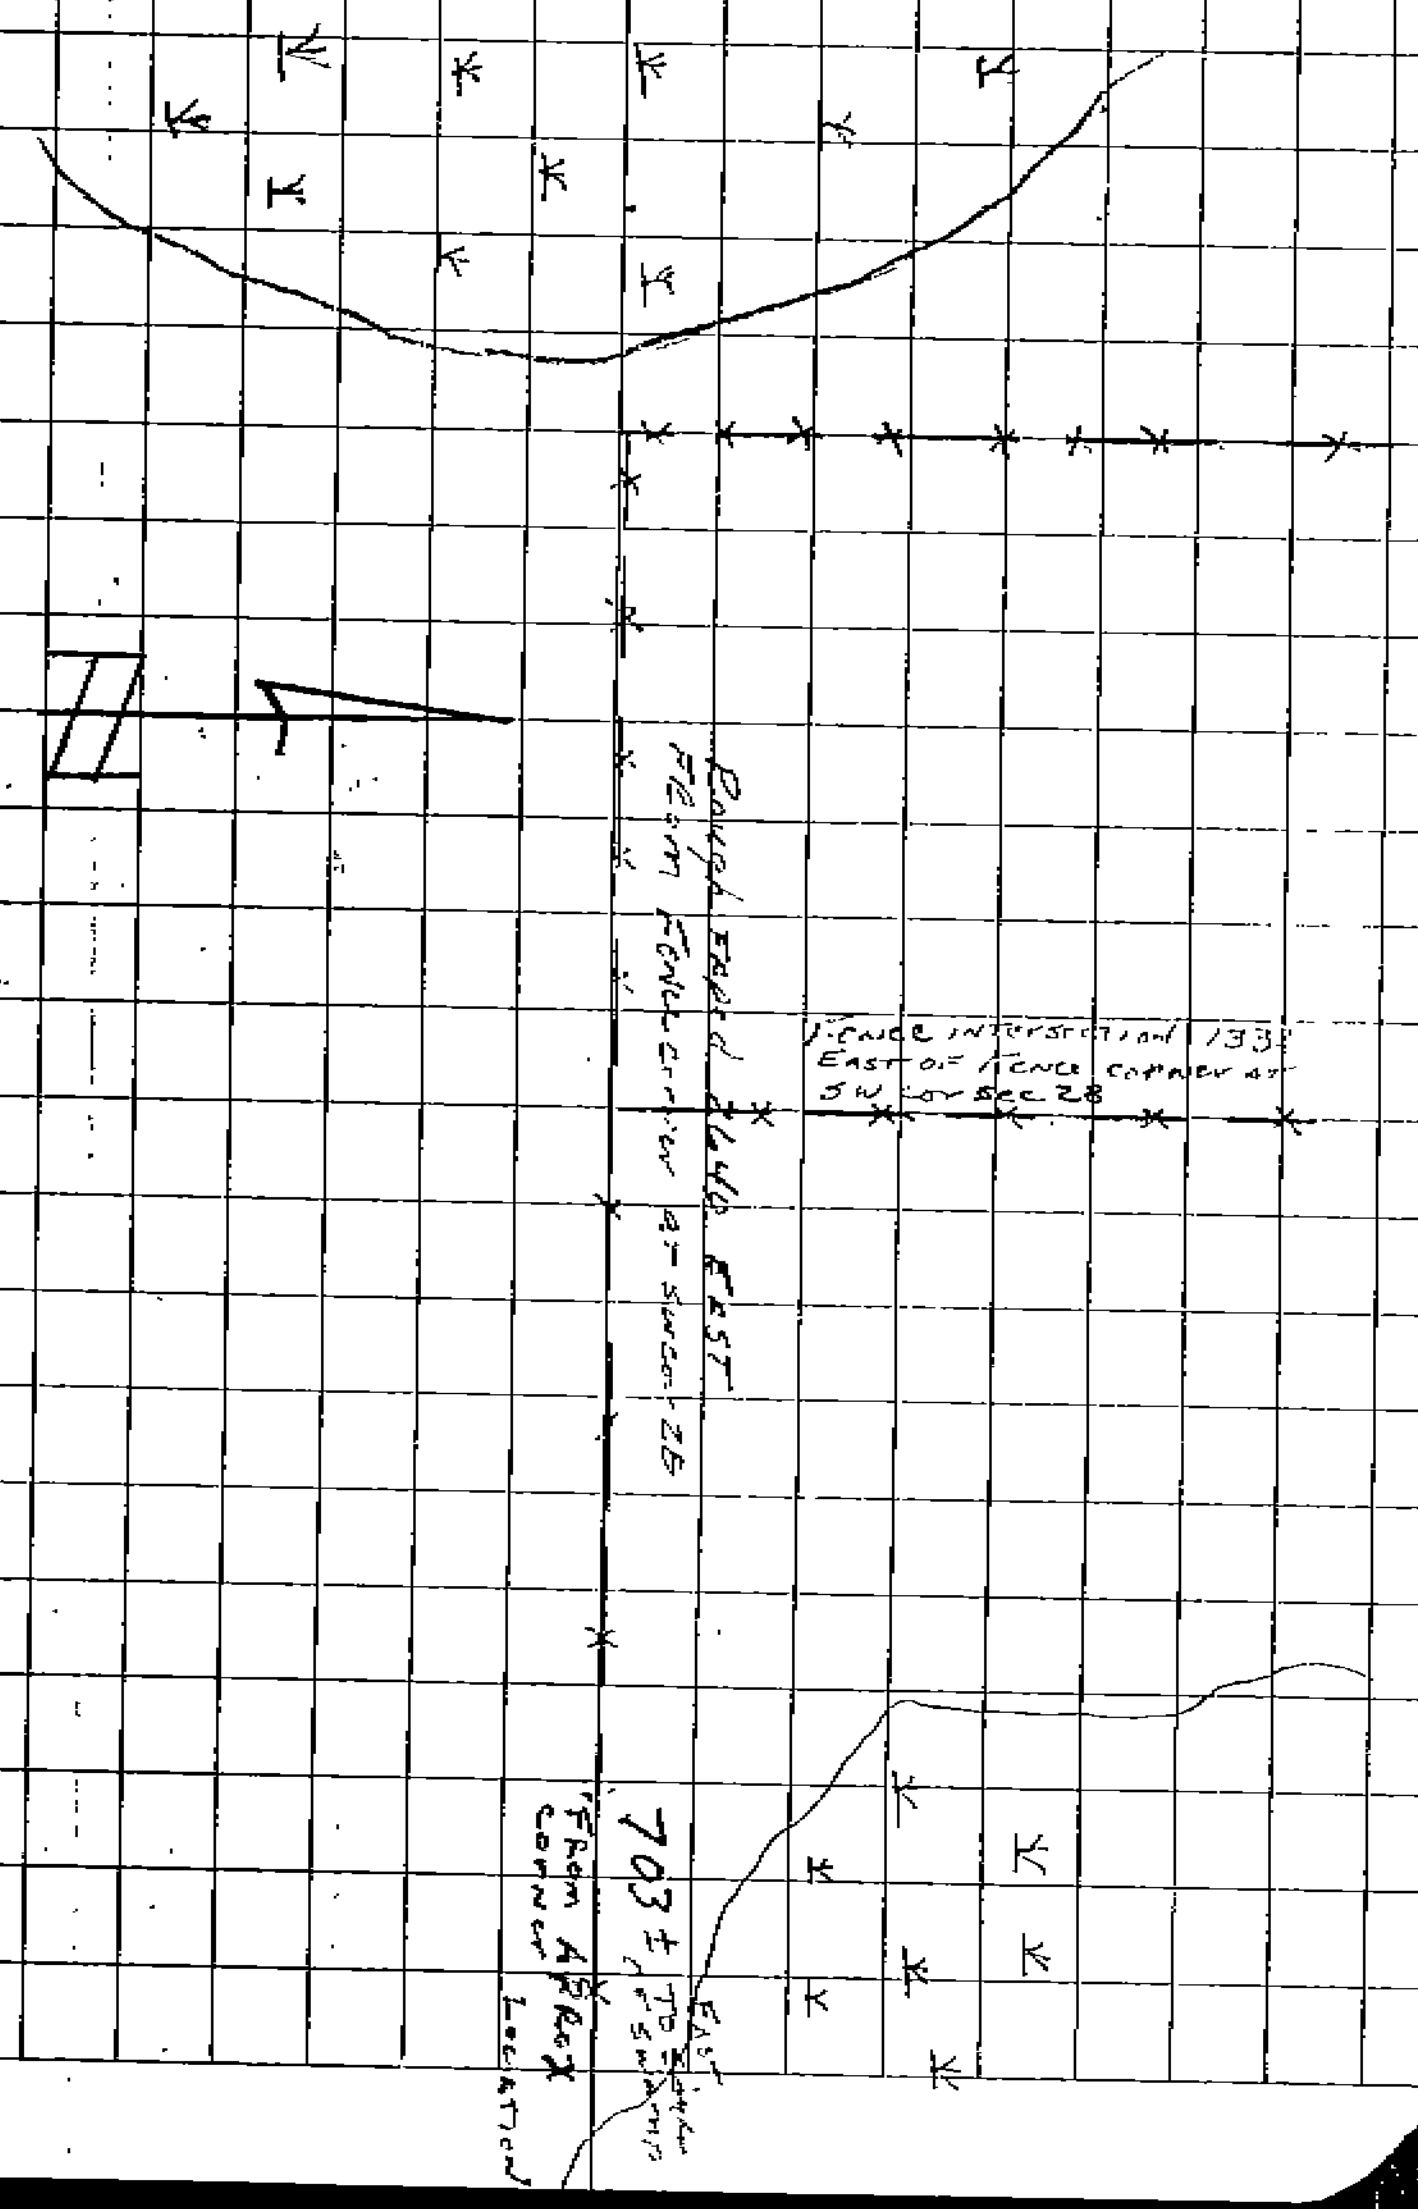
Rough taped 2640 East From Fence corner at SW cor 28
Fence intersection 1333 East of Fence corner at SW cor Sec 28
703± to edge of swamp
East
From Approx corner Location

N1/4 Cor of Section 18
136-26
J-3

Sept 10, 1981
Tom Garlinghouse
Steve Blanick
Terry Savalota

~~16~~
18

Time spent 2 hours

Original Ties

12" Tamarack	N8W	29 LK	$19^{\underline{16}}$
8" Tamarack	S63½W	41 LKS	$27^{\underline{05}}$

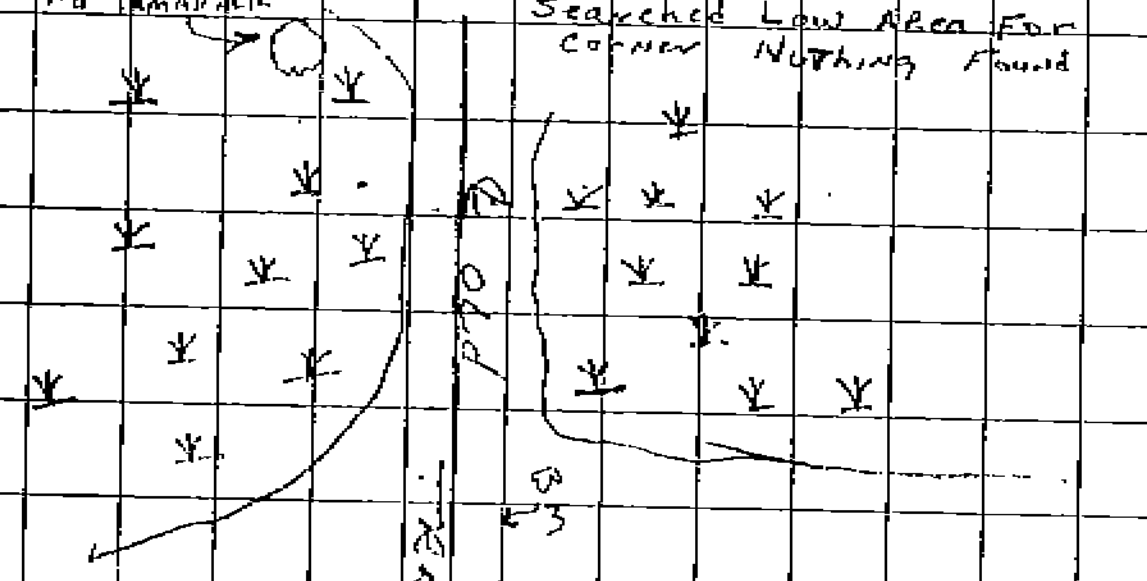

IN 1863 a post was set for
This corner with 2 Tamarack ties
IN 1900 R.C. Whiteley set a post
From orig BTs; In 1904 A. Garrison
Found The monument in place.

NE Cor of 18

MC ON NORTH Side of Perry LAKE
BETWEEN SEC. 3 & 4 T-136-26

IN 1863 a 5" white Birch was marked FOR THIS corner; IN 1906 RK WHITELEY Fd IT in Good order. IN 1913 KNudson also Fd THIS corner; IN 1933 PRESTOR Fd Birch in place AND He ALSO Fd AN IRON monument IN place He SET 2 TIES For The Corner

a 14" white pine N 83 W $40^{\underline{30}}$
9" spruce N 57E $31^{\underline{40}}$

MC ON North Side
OF Perry LAKE
BETWEEN SEC 3 & 4
T 136 R 26

Sept 18, 1981
Tom GARLinghouse
Willing Buckley
Bill Olander

~~17~~
19

Test To 2" pipe Filled with Concrete
3" Below Surface of water @ Edge of swamp
Time Spent 2 hours

Nail in 12" Ash N 20 W $14^{\underline{20}}$
Nail in 10" poplar N 5 E $14^{\underline{21}}$
Brass BT TAG in FACE OF 14" Dead white pine
N 70 W $40^{\underline{26}}$

D|E-13

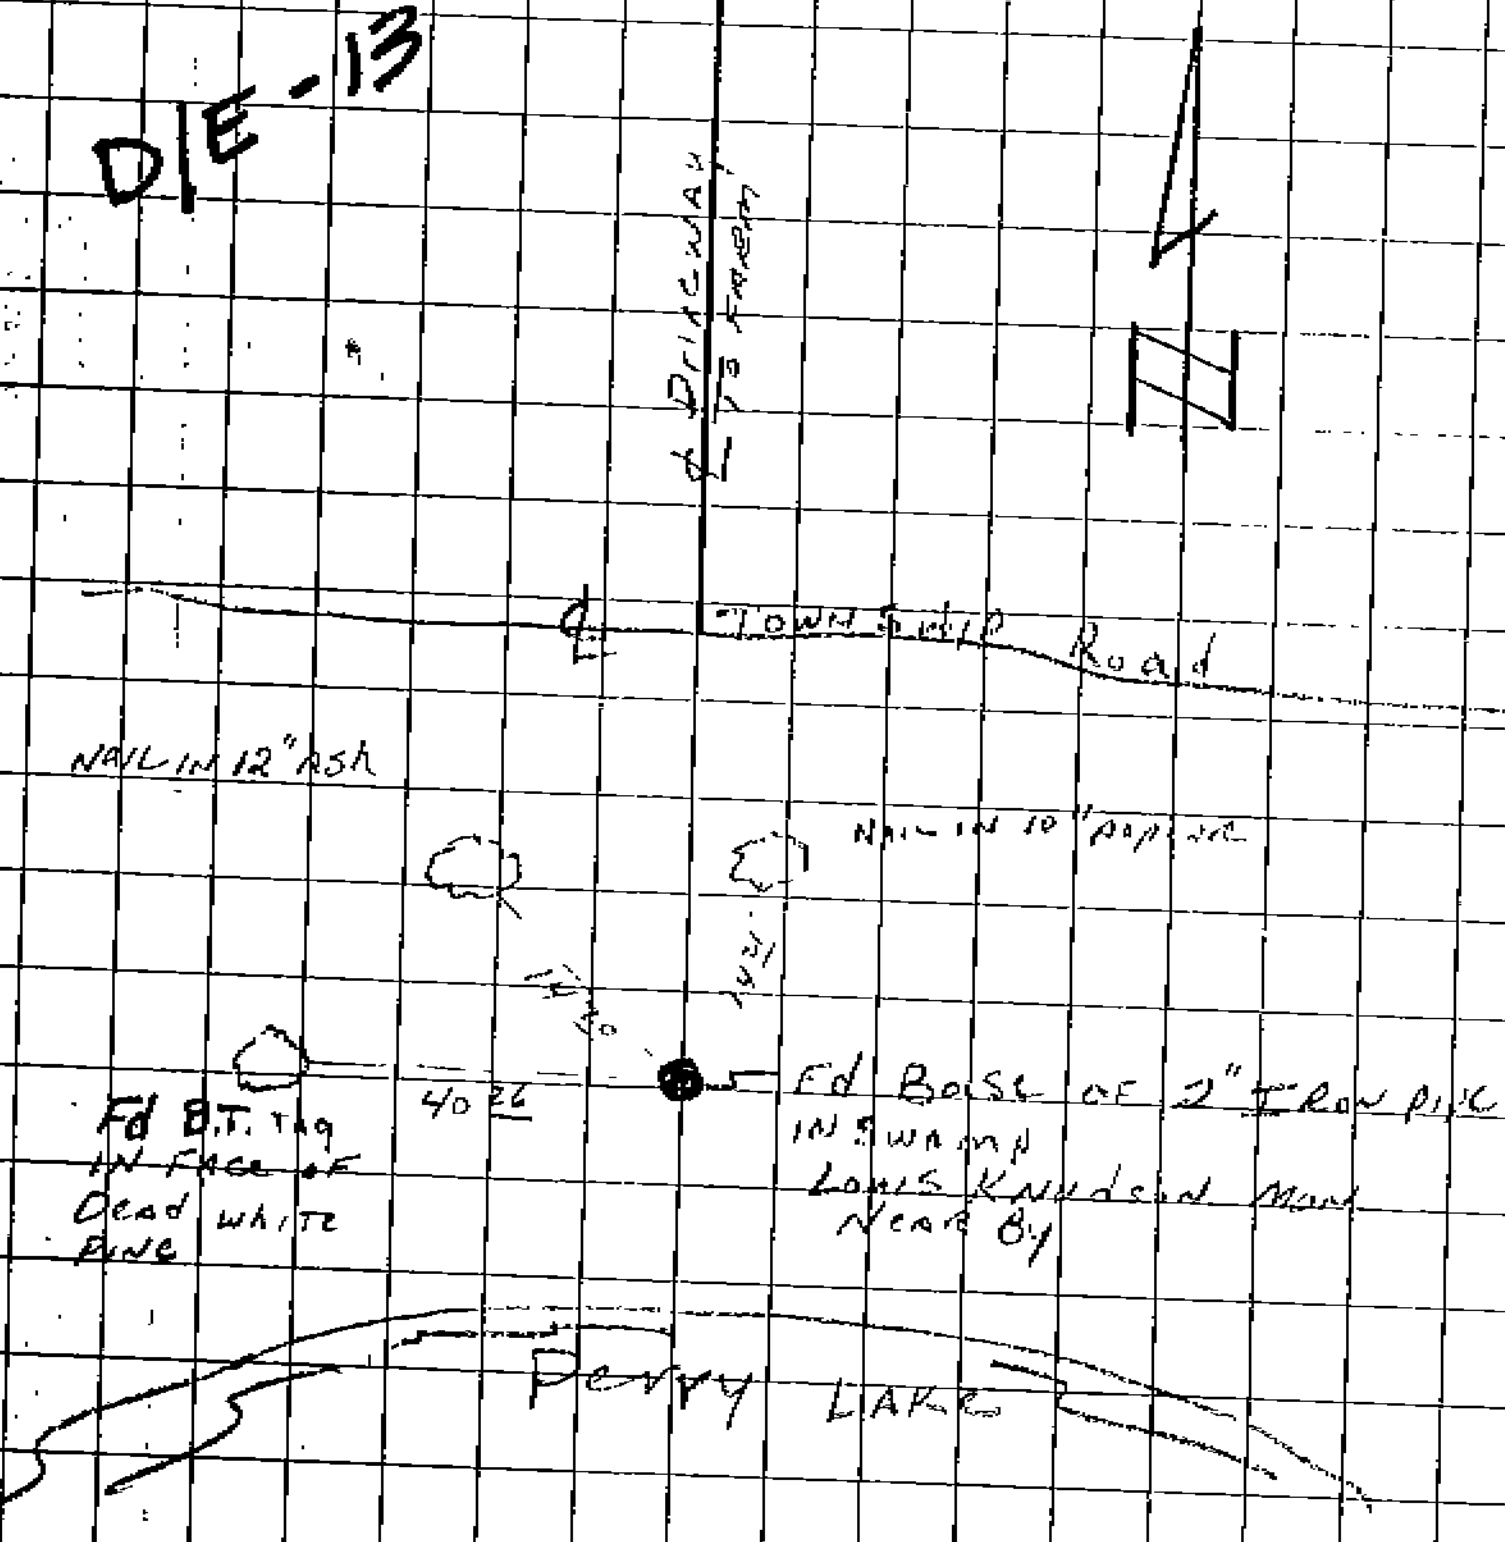

N
℄ Driveway to Farm
℄ TOWNSHIP Road
NAIL IN 12" Ash
Nail in 10" poplar
14 21
14 20
40 26
Fd B.T. Tag IN FACE of Dead white pine
Fd Base of 2" Iron pipe IN swamp
Louis Knudson Mon Near By
Perry LAKE

TELEDYNE NO. 447

According To Bill olander and Arnold Prushek This 1/16 cor was set By Dean Anderson in a survey for Arnold's father Joe Prushek.

WJB.

NE cor of SE1/4 NE1/4 Sec 10-136-26

Sept 24, 1981

Tom Garlinghause
Wally Beckler
Bill Olander

F-17

1/16 cor By School yard

Ties To 1/16 cor Fd 1" pipe 1' Above Ground leaning North West

Nail in 8" poplar N 10 E 18.43

Nail in 8" poplar N 5 E 20.76

Pipe is 67' North of ¢ Road [illegible] field. 5' East of [illegible] Barbed wire Fence

Time Spent 1 1/2 hour

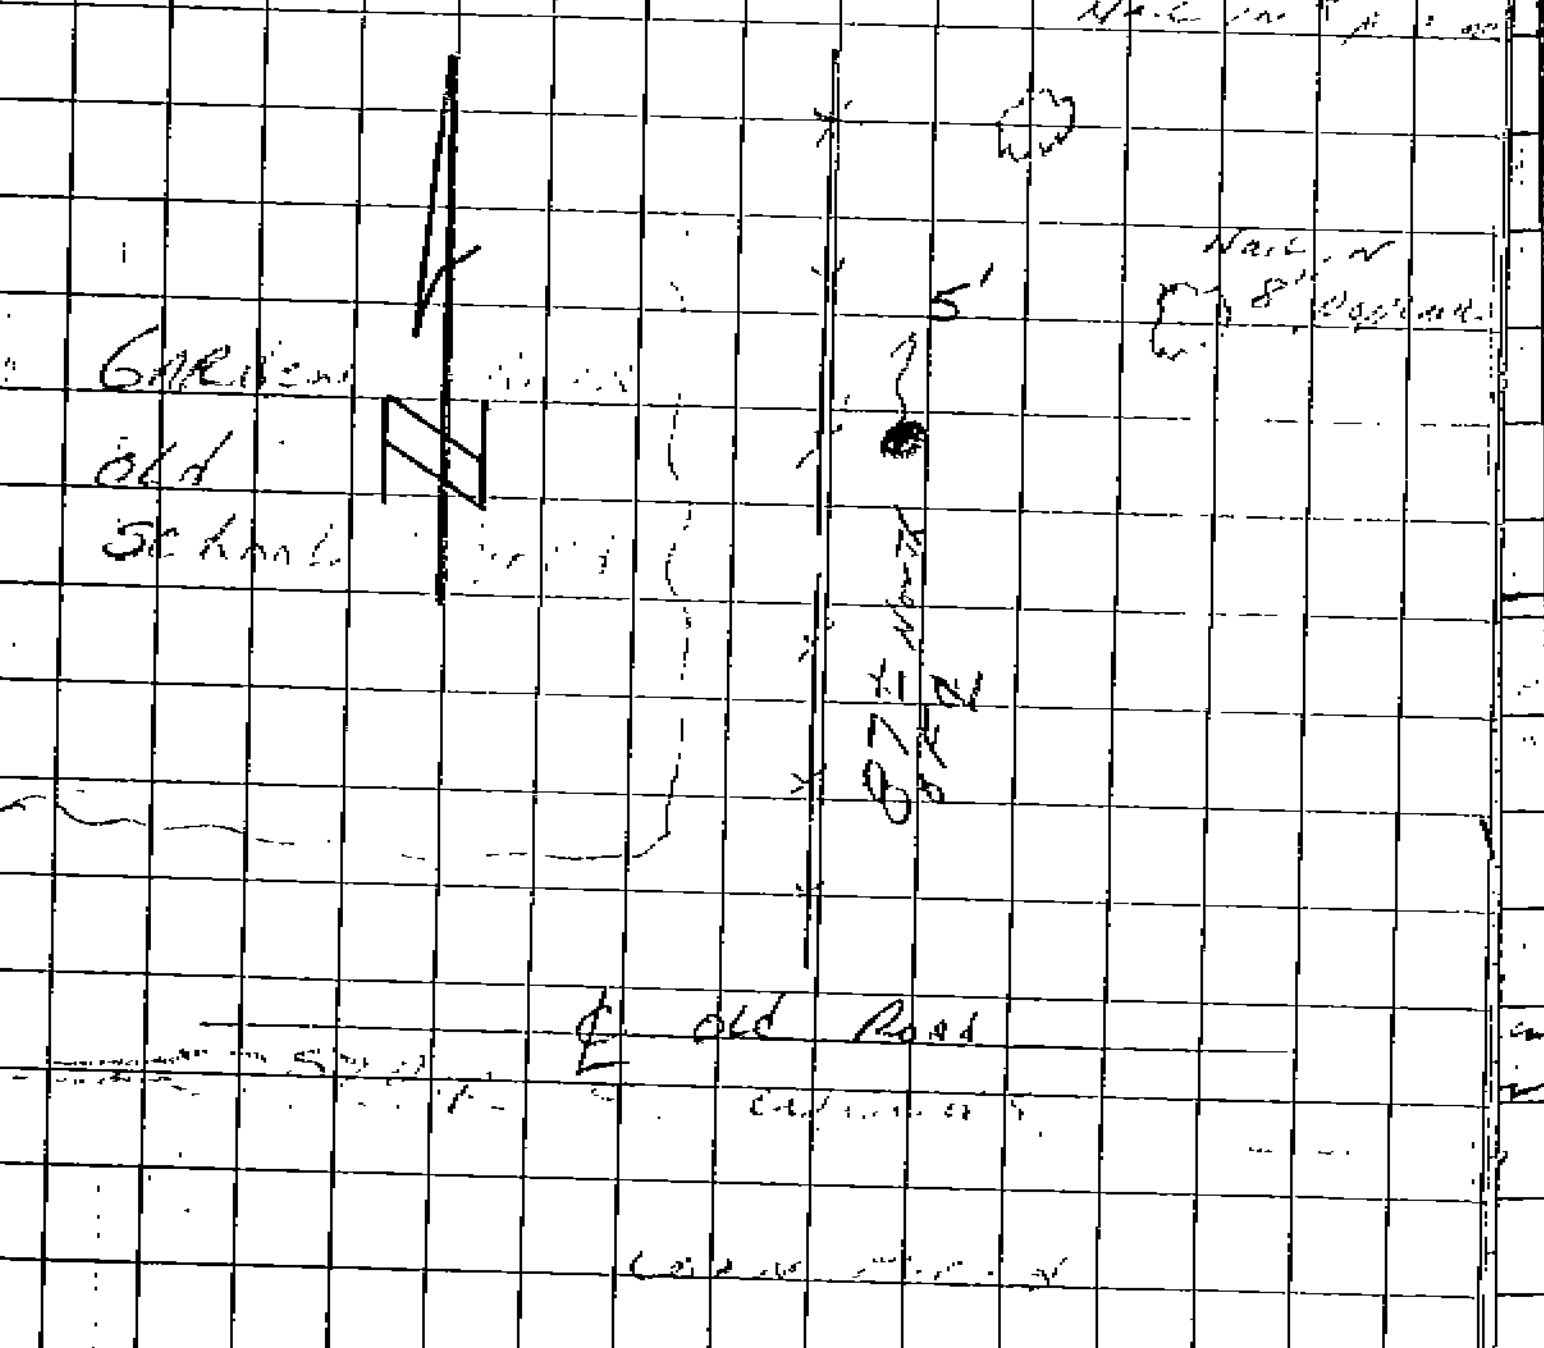

Sec Cor Common To
Sections 2-3-10-11

IN 1863 a post was set at this corner with BT'S; IN 1906 RK Whitely set a post from the orig BT'S

IN 1947 Dean Anderson either set or located an Iron pipe with cap.

Time Spent 1 1/2 hours

Note: This cor could have been moved a considerable dist by clearing of Power Line.

According To Bill Olander and Arnold Prushek Dean Anderson Ran The east Line of sec 10 for Arnold Prusheck's father. Arnold Prushek said They built The fence on the survey Line but didn't Know if The fence was on The True Line or Random Line

W7B.

Tom Garlinghouse
Wally Buckler
Bill Olander
Sec Cor Common To
Sections 2-3-10-11 - 136-26

Sept 18, 1981

E-17

Power Line Runs S40W

Found 4' Long pipe with oval cap Marked as Section Corner Laying on Side in Swampy Area Halfway Between power Lines, 28' west of extended North wire fence line

Nail in NW side Power pole S55W 148^{99} old Power Line

Nail in SW side 10" white oak S15E 153^{65}

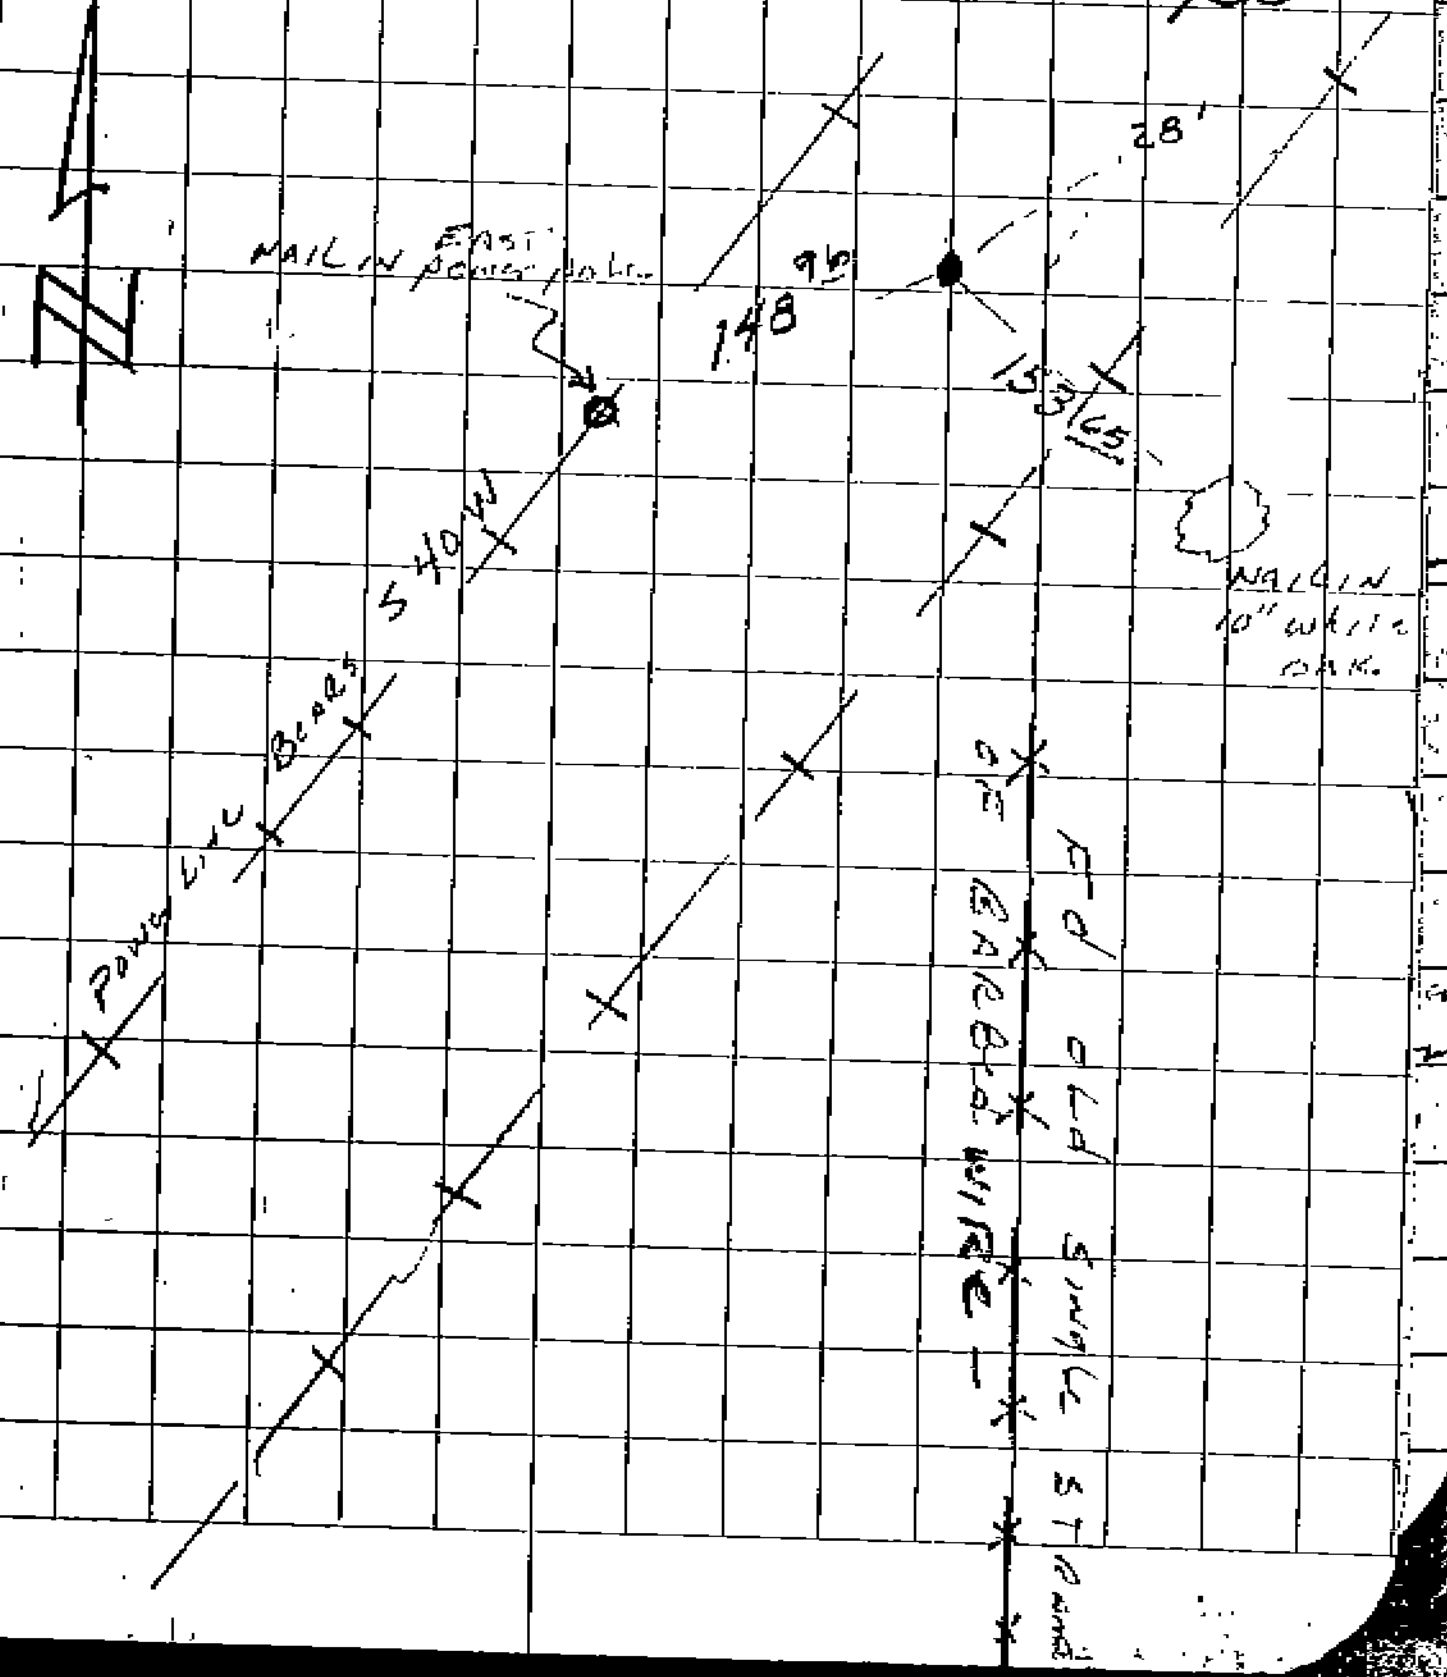

1893 1859

Tom Garlinghouse
Wally Buckler
Bill Olander

6-17

Sept 18, 1981 **22**

Quarter Corner Common To Sec 10-11 136-26

IN 1863 a 7" Aspen was marked for The Corner. No BT's

Searched for 1 1/2 hours Fd Nothing

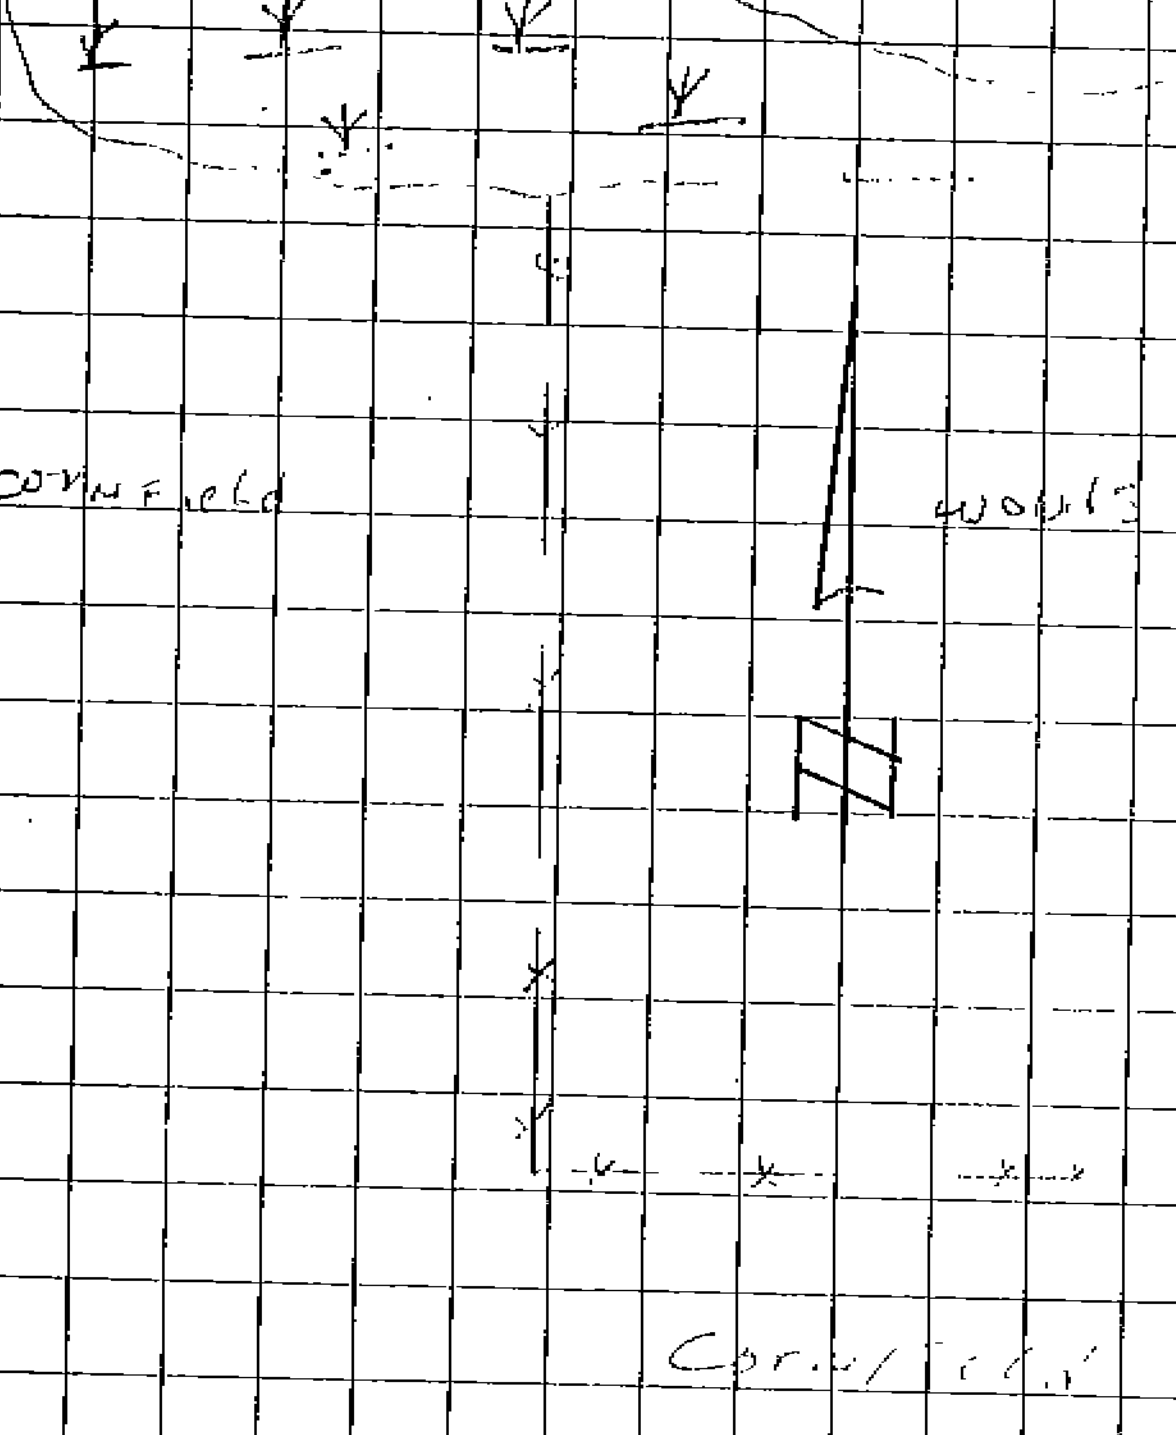

Note.

According To Bill olandeR someone Told Him There was a Concrete MonumenT on Top of The Hill east of The Twp Road and west of Highway 6 by a big Pine Tree That was ThoughT To be on sec Line.

The MonumenT was suppose To Have some markings on IT.

Bill O, Also said ThaT one of The Log Cabins originally Had seT farther North buT was ThoughT To be North of Line and was Moved south.

WTB,

E-13-14
MC on EAST side
of Perry Lake
North Line of Sec 10-136-26. F-13-14

Sept 18, 1981
Tom Garlinghouse
Wally Buckler
Bill Olander

~~24~~
23

Orig Ties 9" Birch [illegible] 53 Lks
10" Birch [illegible] 52½ W 270 Lks
W 1868 A post was set
for this corner and BT's were
set.

Searched for 1½ hrs

Quarter
To Sections 7-8 Twp 136-26

IN 1863 a post was
set with B.T.'s
IN 1926 Louis Knudson
set this corner and also
set some new ties

To Sections 7&8 — mmon Sept 18, 1981
Twp 136-26 — Tom Garlinghouse
Wally Buckley
Bill Olandow

~~22~~
24

Knudson's 1926 Ties

12" Elm	N12E	28.6
10" Ash	N32W	22.0

time spent 1 hr.

Ties to Knudson monument w/ oval cap 1½' above swamp

Nail in 12" Ash	S15E	14.64
Nail in 14" Elm	S50W	28.69
Nail in 10" Ash	N55W	14.59

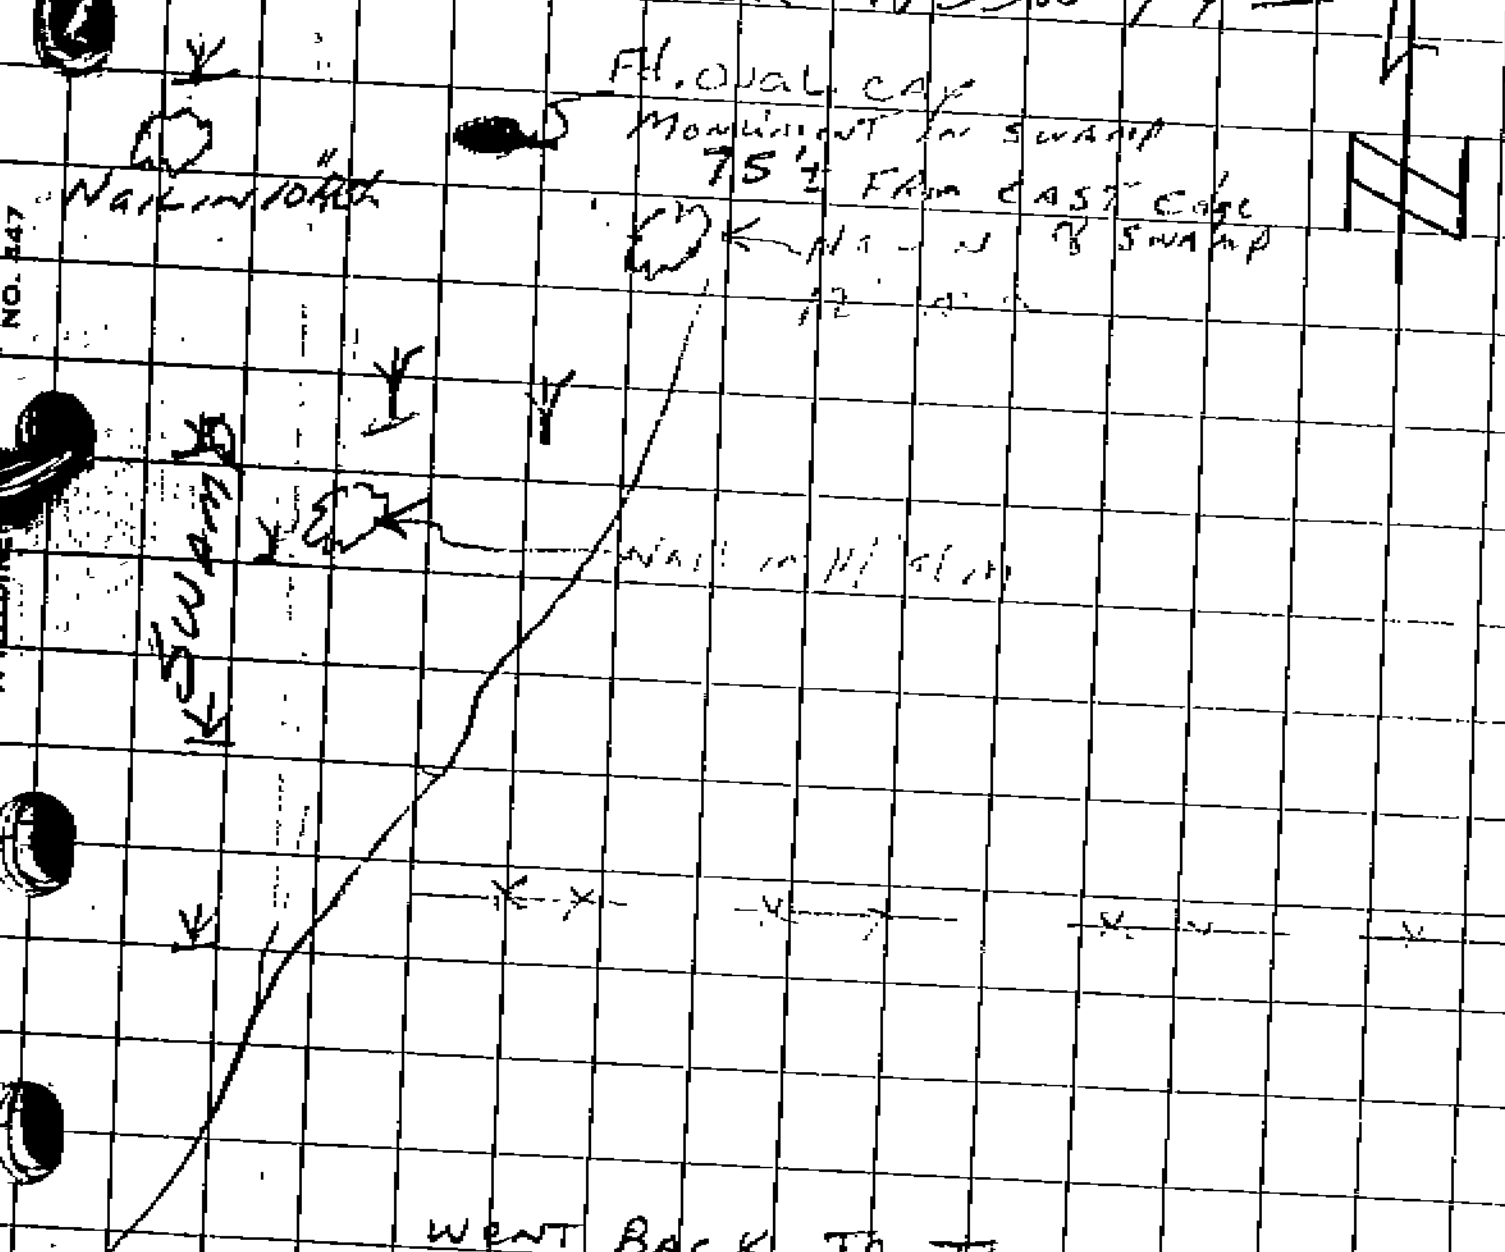

Went back to tie out corner
Found by Dan Glenz on Sept 28, 1981
Tom Garlinghouse
Steve Blanick
Terry Savaloja
Total time spent 1 hour

Section Corner Common
To Sections 17-18-19-20
Twp 136-26

In 1863 A post was set
For this corner, Ties were
also set at this time.
In 1904 L. Garrison
Found the monument in
place –

Section Corner Common
To Sections 17-18 19 20 - 136-26 Sept 30, 1981

N-5 Tom Garlinghouse
Steve Blaswick
Terry Savaloja

Orig - Aspen N.E. 37 [illegible]
Ties Aspen [illegible] 3 LKS

Searched for 2½ hours

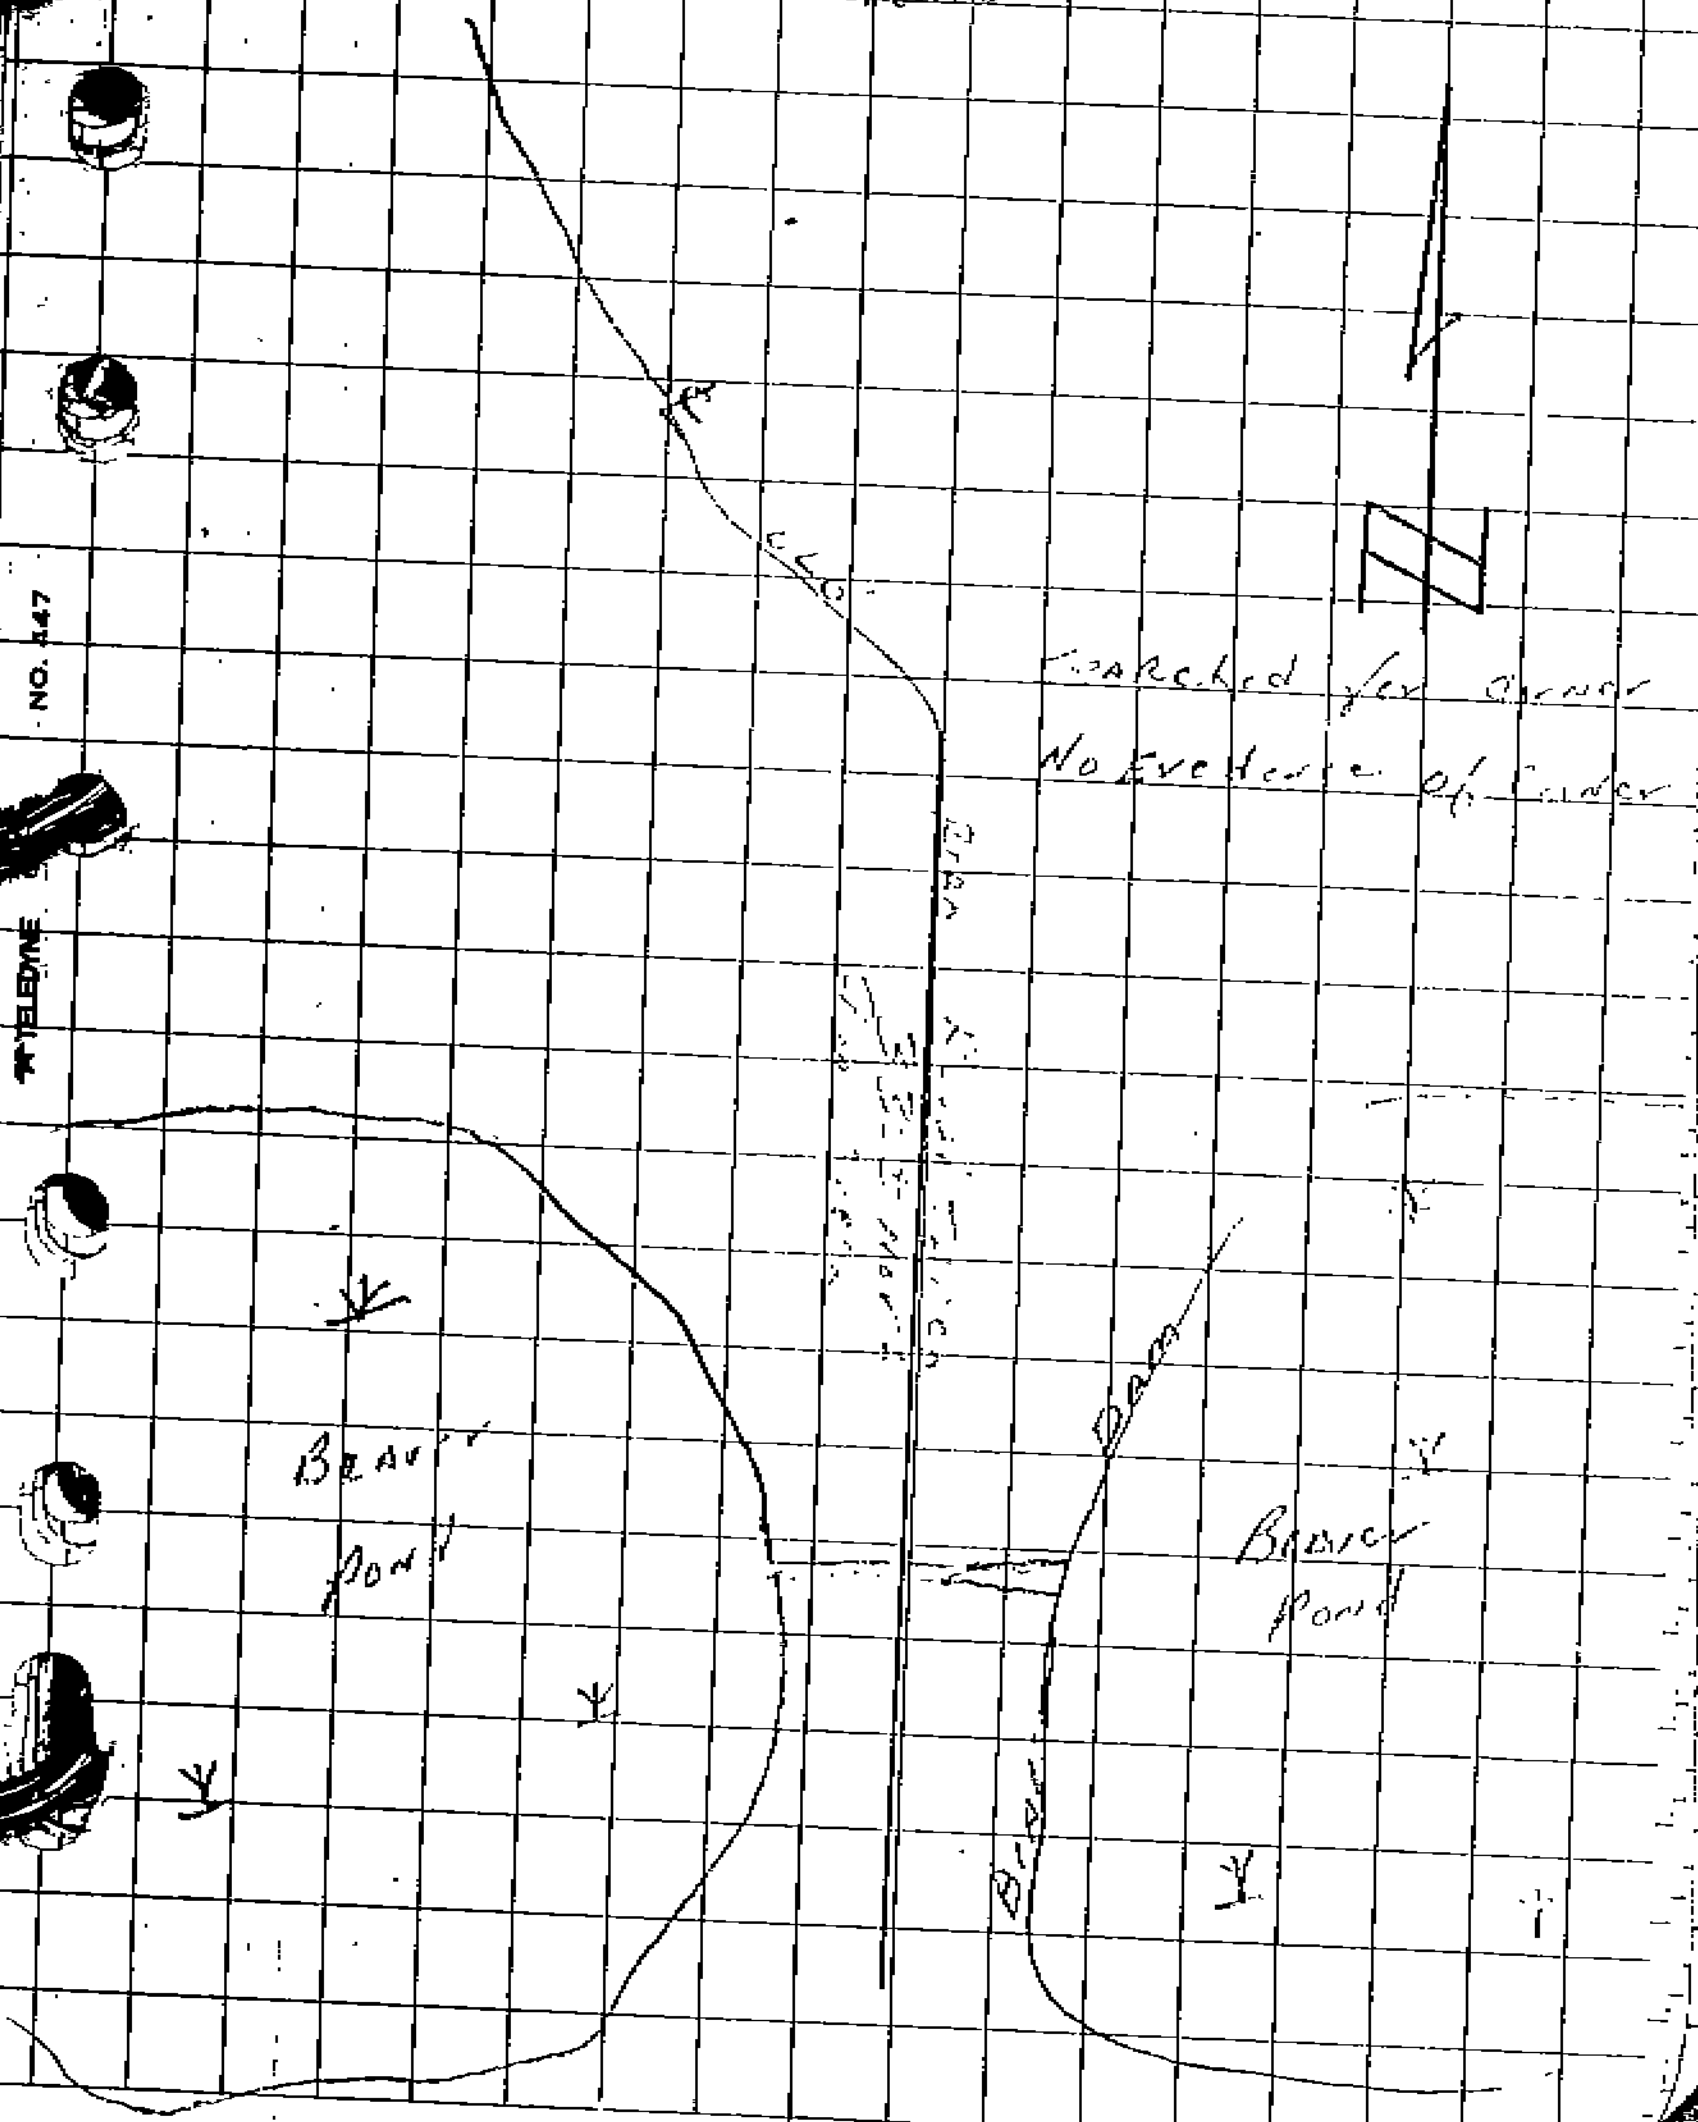

Sept 28, 1981
Quarter corner common to
Sections 19-20-136-26
P-5 Tom Garlinghouse
Steve Blanich
Terry Savolaja

orig ties { 6" Aspen S 24 E 8 ft
5" Aspen N 65 W 12 ft

Searched For 2½ hours

IN 1863 a post was set for this corner and 2 ties were set. in 1904 L Garrison set A Temporary post, IN 1905 whitley set the corner IN place.

Searched For Corner No evidence Found AT INT of Roads

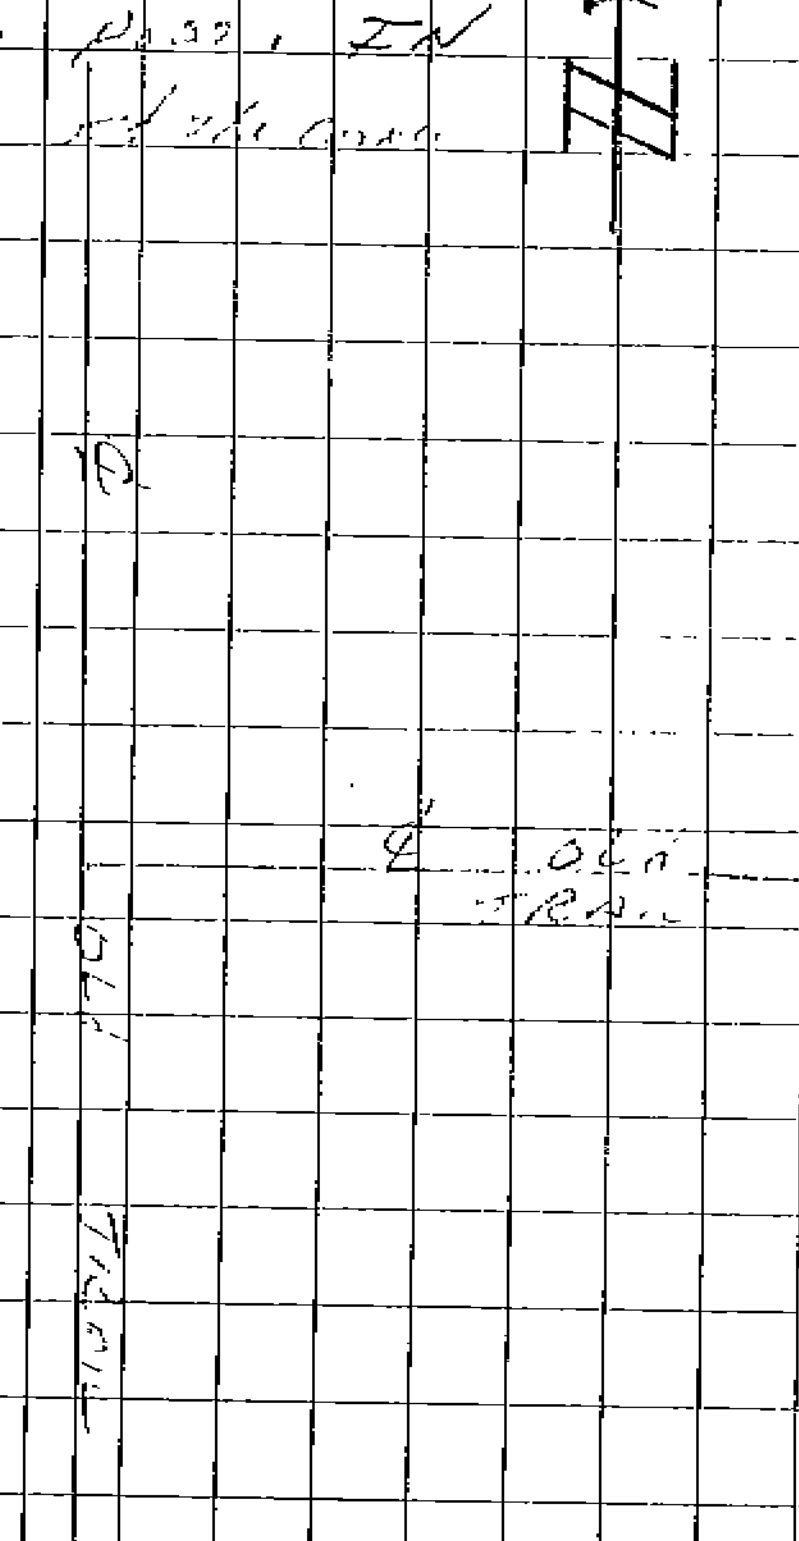

1/4 cor common to sec 3|4 136-26
Sept 28, 1981 C-13
Tom Garlinghouse
Steve Blanich
Terry Savaloja

~~25~~ 27

Time Spent 1 hours

orig ties' 7" Tam S64½E [illegible]

8' Tam S80W 35.1[illegible]

Ties to 1" pipe 2' tall 7½' west of fence corner

Nail in 10" poplar N20E 37.18

Nail in 10" ash N50E 37.95

Nail in 14" white oak S40E 37.32

7½' East to 5' tall 4" pipe at fence corner. There is also a 1½" well point at the fence corner

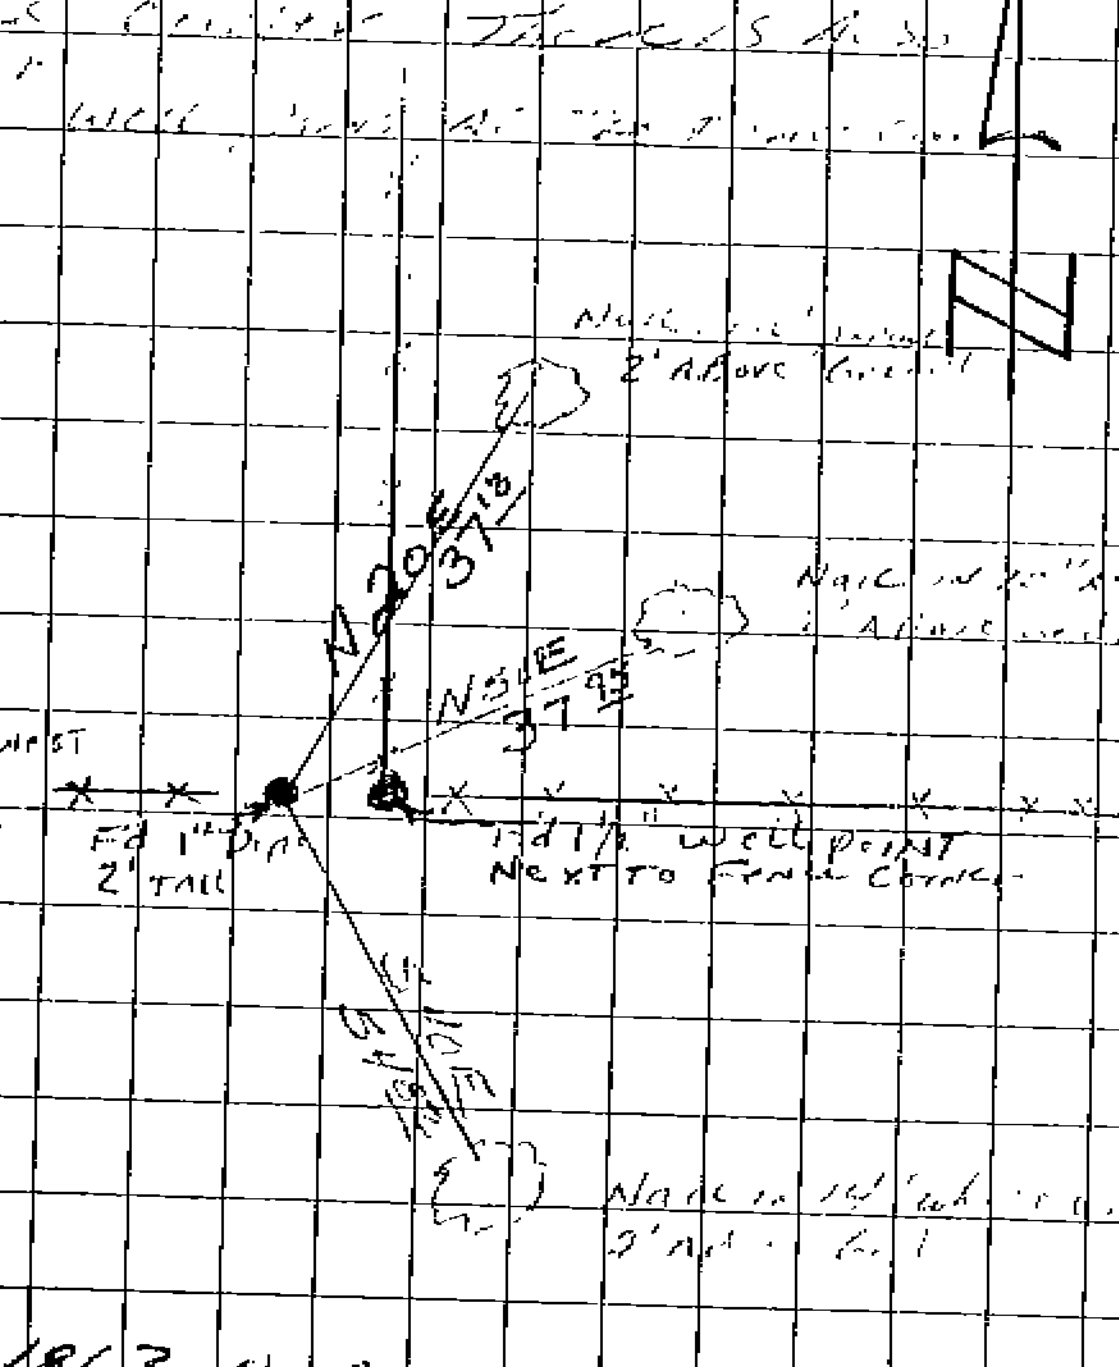

N
Nail in [illegible] 2' above ground
N20E 37.18
Nail in [illegible] 2' above ground
N51E 37.95
old East-West fence line
Fd 1" Dia 2' tall
Fd 1½" well point next to fence corner
S40E 37.32
Nail in 14" white oak 2' above ground

In 1863 a post was set [illegible] this corner and ties were made to two tamarack BT's

E-1/2
Meander Corner Common
To Sections 6-7
T 136 R-26

Tom Garlinghouse
Steve Blaskel
Terry Sanderson
Sept 29, 1981

Orig Ties	8" wh Ash	N 54E	37LK	[illegible]
	6" wh Ash	S 15E	22LK	[illegible]

Time spent 2 hours

Nail IN 12" ELM	S 15E	18.19
Nail IN 6" Ash	S 55 W	13.92
Nail IN 10" Ash	N 30 E	27.04

Fd 1½" Iron pipe @ Base of 16" White Ash DBL Blaze Facing West
90'± West To Lake
35± East To High Ground

In 1863 [illegible] Set
for [illegible] Ginder [illegible]
White Ash [illegible].
In 1985 [illegible] N [illegible]
[illegible] orig BT [illegible]

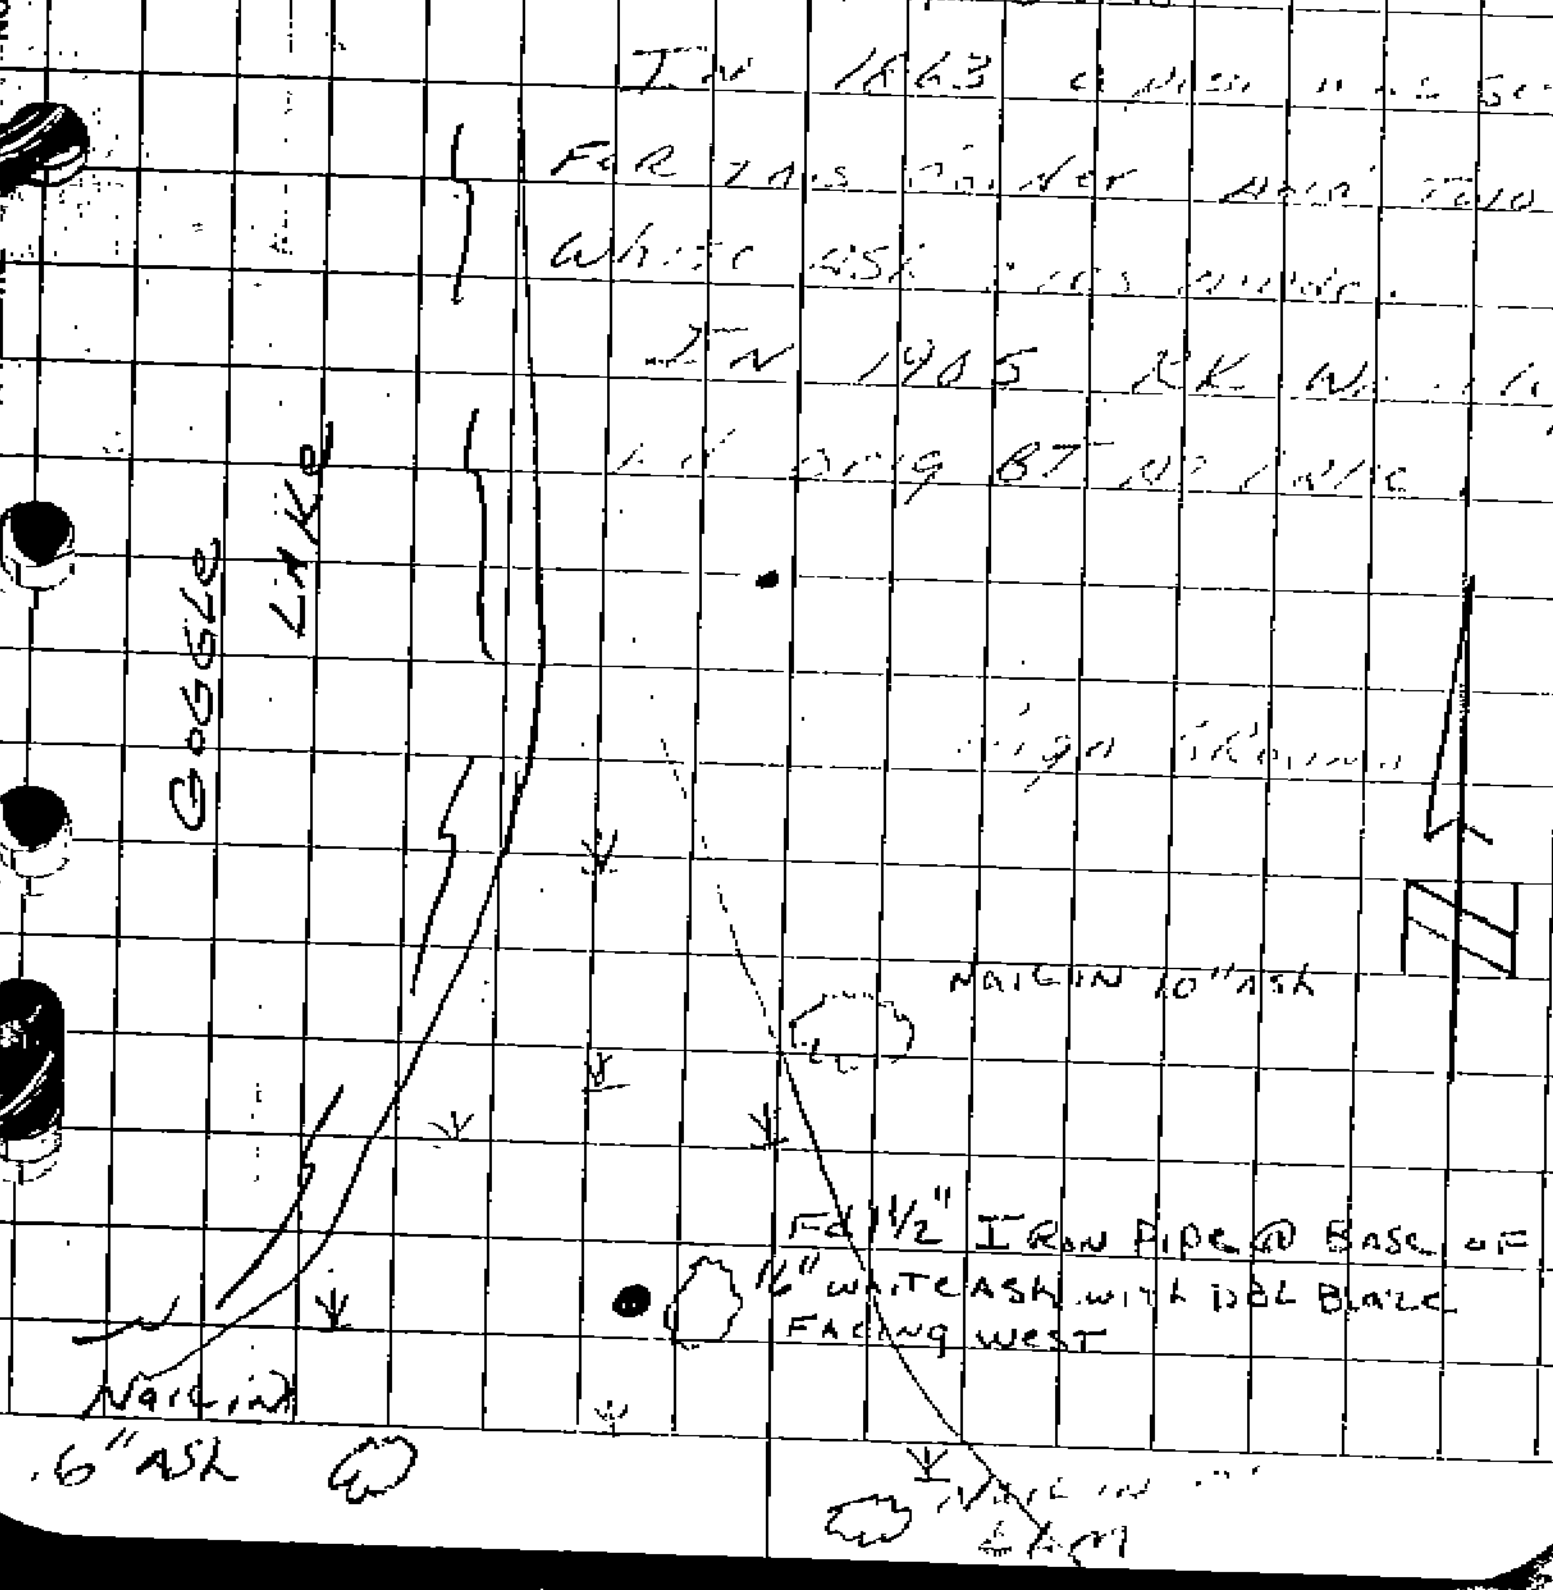
Goggle Lake
High Ground
Nail in 10" Ash
Fd 1½" Iron Pipe @ Base of 16" White Ash with DBL Blaze Facing West
Nail in 6" Ash
Nail in Elm

MC Common to Sec A-18-19
And Sec 35-137-26 2-136-26

Sept 1, 1981
Tom Gaelinghouse
Steve Blanick
Terry Swalogh   time spent 1 hour

No DATA Available in Crow wing County Land corner Record Book.

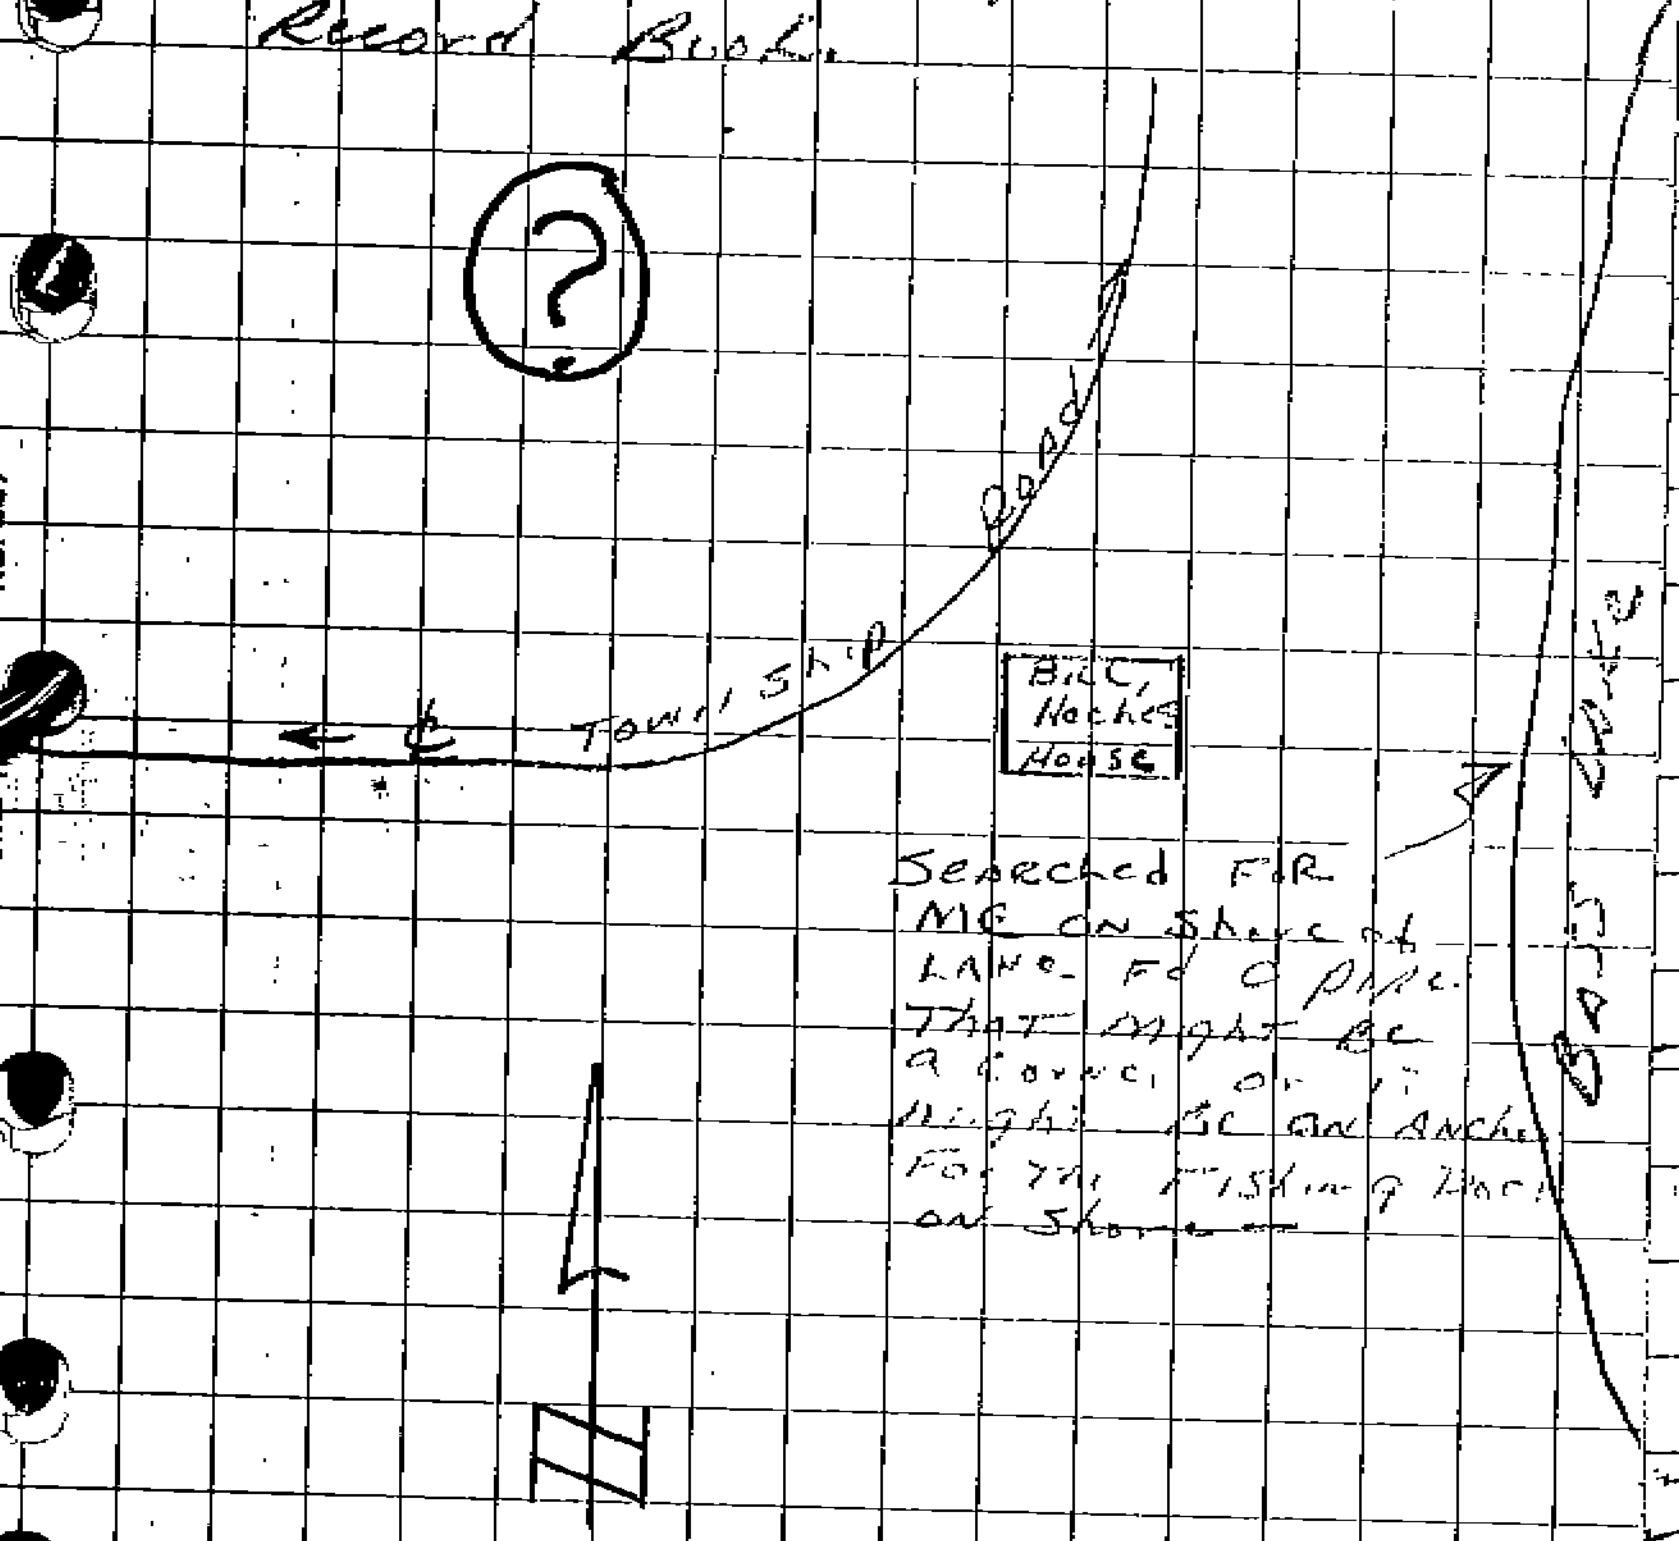

Searched for MC on Shore of Lake. Fd a pipe That might be a corner or it might be an Anchor for the fishing Dock on Shore.

CROW WING CO.

1981 Remonumentation Contract S-108

TWP 136N. RGE 25W OF THE 5th P.M.

index
TWP 136N, RGE 25W 5th P.M. 31

Contract 5-108

Surveyor Wallace F Buckler

Page	Cor. Desc.	Page	Cor Desc.
1	SW. COR Sec 19	24	So 1/4 COR Sec 16
2	SE COR Sec 19	25	So 1/4 COR Sec 4
3	East 1/4 COR Sec 20	26	dist from N 1/4 COR
4	M.C. East Line Sec 20		Sec 15 To NE COR 15
5	SW COR Sec 16		
6	N. 1/4 COR Sec 20		
7	SW COR. Sec 17		
8	SW COR Sec 15		
9	SW COR Sec 15		
10	SW COR Sec 9		
11	So 1/4 COR Sec 9		
12	So 1/4 COR Sec 9		
13	SW COR Sec 10		
14	SW COR Sec 10		
15	So 1/4 COR Sec 10		
16	SW COR Sec 11		
17	SW COR Sec 12		
18	So 1/4 COR Sec 12		
19	SW COR Sec 1		
20	West 1/4 COR Sec 1		
21	West 1/4 COR Sec 11		
22	West 1/4 COR Sec 9		
23	SW COR Sec 4		

SW Cor Section 19-136-25
R-1

Tom Garlinghouse
Steve Blonick
Mark Betley

32
Time Spent 1½ Hours

May 19, 1981

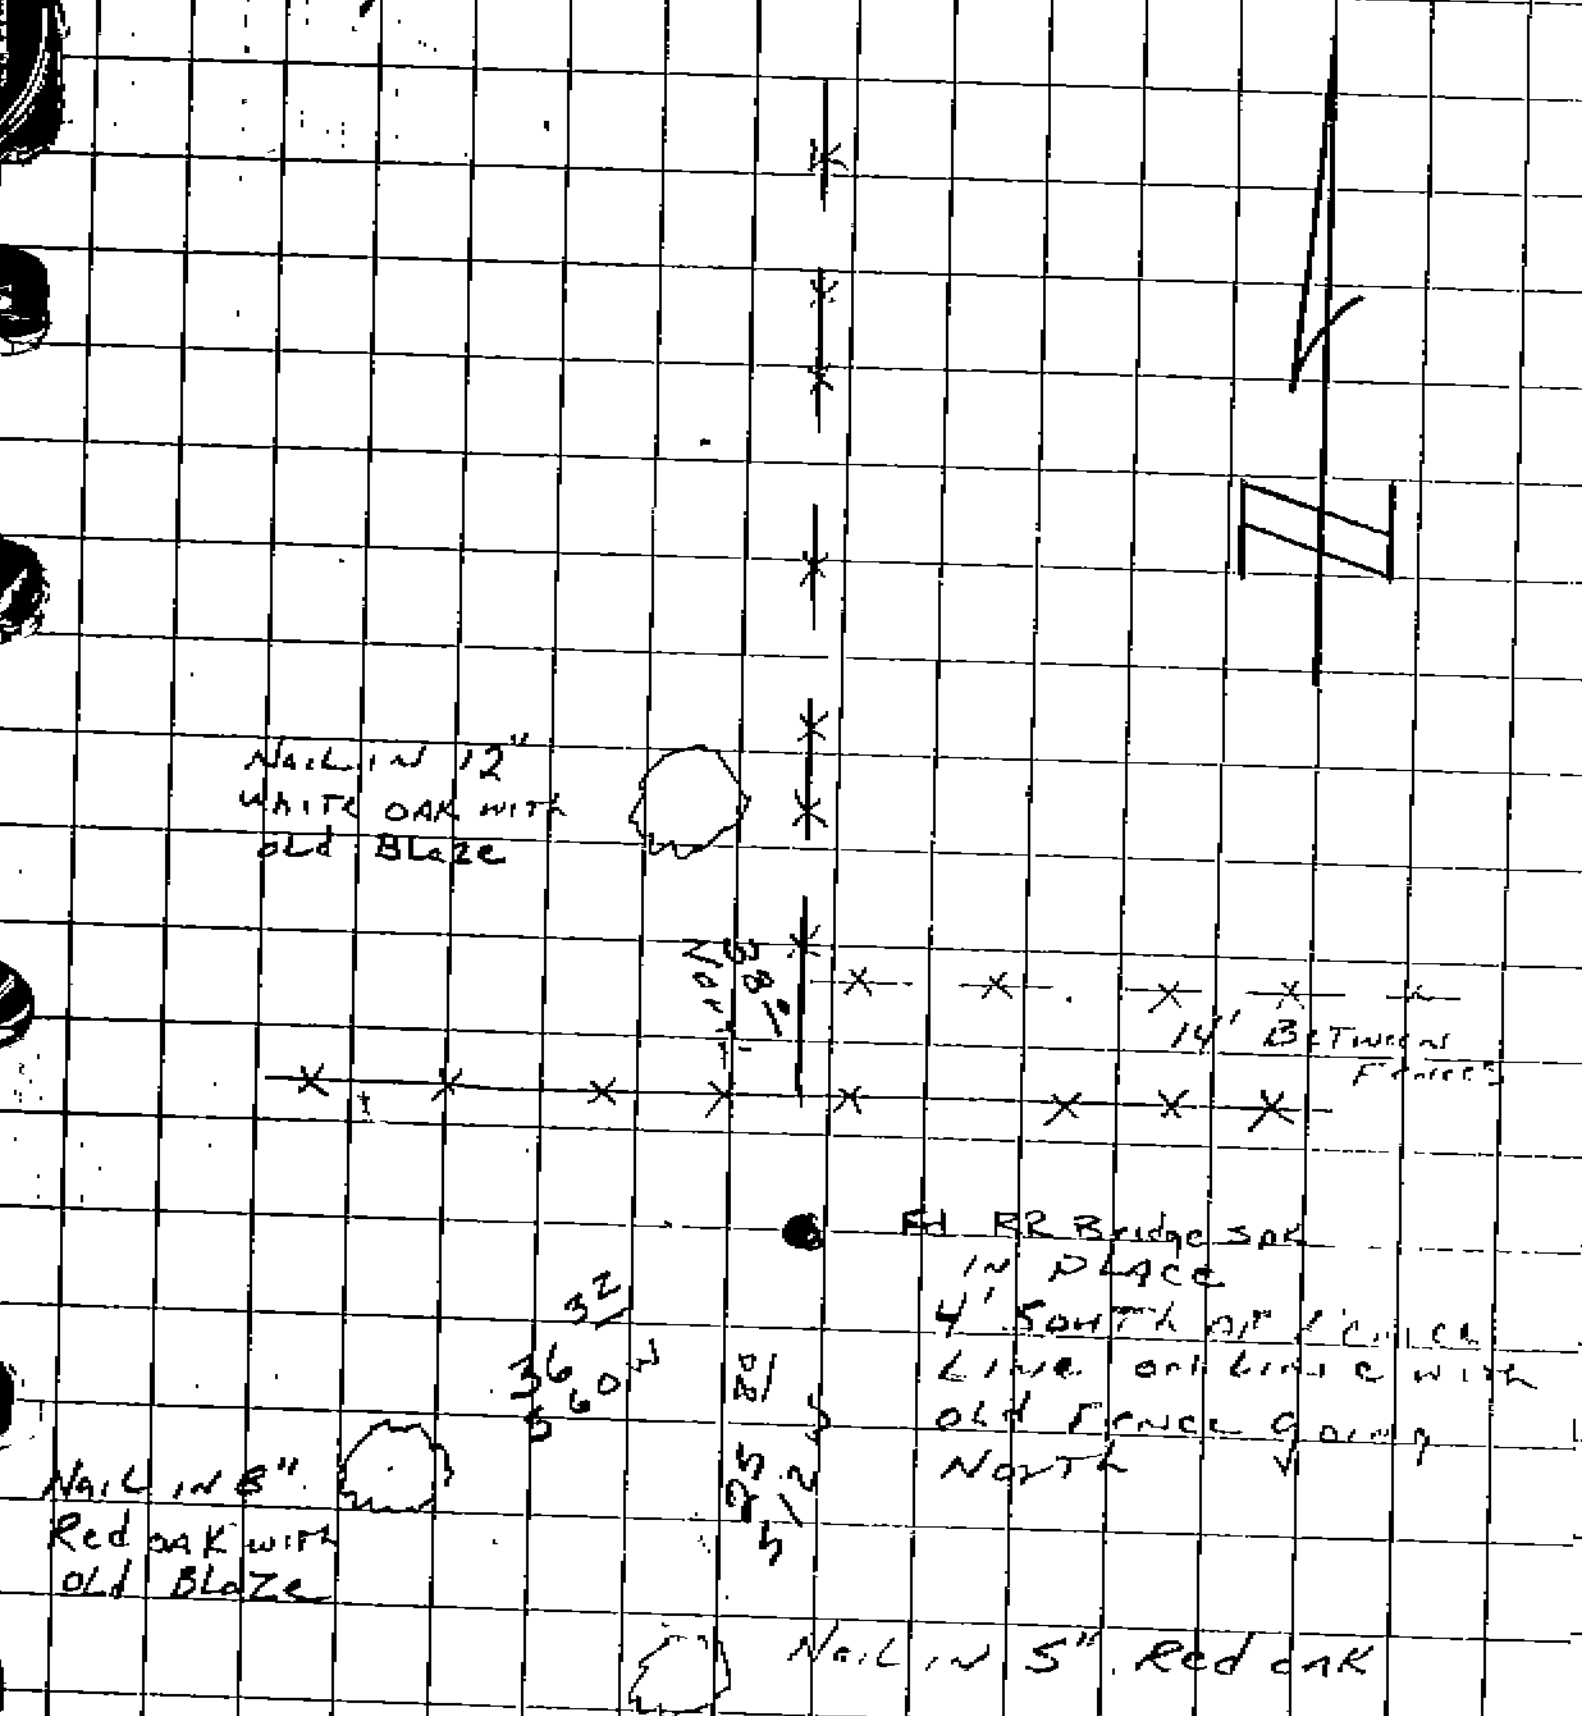
N
Nail in 12" White oak with old Blaze
38' North
14' Between Fences
Fd RR Bridge spk in place 4' South of fence line on line with old fence going North
32
36 60 W
Nail in 8" Red oak with old Blaze
Nail in 5" Red oak

See Reverse of this page.

TALKed TO Andy BurgsTAller
aBouT SecTion And QuarTer Corners
in Area, HE Said He only Knew
of one pin in The area That was
in place That was at The SW.
Corner of SecTion 19 - 136-25
we Found a RR Bridge SPK in
place at The Cor of Fence
INTersection, See Reverse Page
Tom Garlinghouse

Crow Wing County Land Corner Record
POST SET 1858; Resurveyed
IN 1905 By R.K. Whiteley.
J CURO SET 3/4" x10" Iron For
Temp corner & New BTS in 1922
County Hyway dept. Found or set
A 10" BRidge SPK in 1942. They
Also set New B.T.'S

Tom Garlinghouse
Steve Blavich
Mark Betley

SE Cor Section 19-136-25
R-5
Time spent 3 hours

33

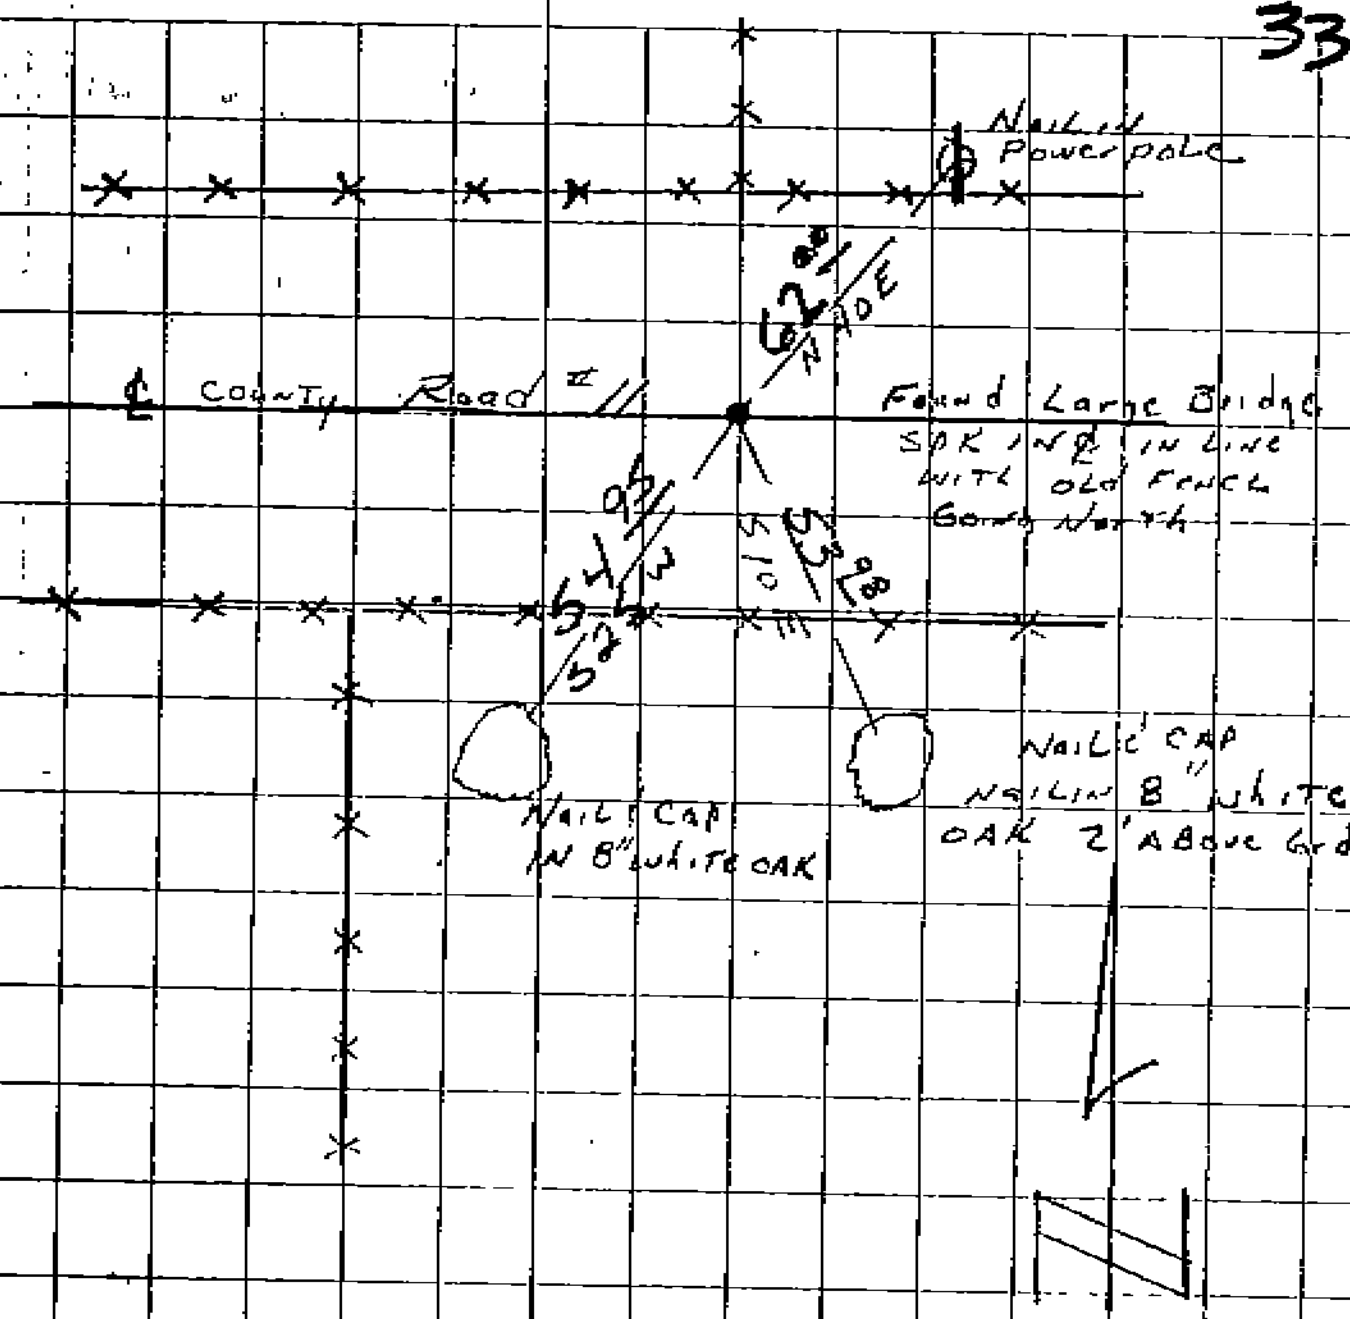
Nail in Powerpole
℄ County Road #11
62 80
N 40 E
Found Large Bridge SPK in ℄ in line with old fence going North
9 3/4 W
54 52
S 10
53 98
Nail & Cap in 8" White Oak
Nail & Cap Nail in 8" White Oak 2' Above Grd.

Found old tie
Iron Nail & Disk in 12" Ash S 30 E 71.72

Post set in 1858 Corner Resur
By RK Whiteley in 1899
in 1921 J Curo set 3/4" x 10' Iron
For Temp Corner New Ties
in 1942 County Hyway Dep Found
Monument in place New B.T.'S

May 26, 1981 - June 2, 1981
Tom Garlinghouse
Steve Blanich
Mark Betley

Searched for East 1/4 cor. Sec. 20-136-25
Time Spent 3 Hours P-9
Post set in 1863; in 1904 Reset
By L.E. Garrison - in 1922 J. [illegible]
Set 3/4" x 10" I Rod for Temporary
Corner New B.T.s
(See opposite side of this
page.)

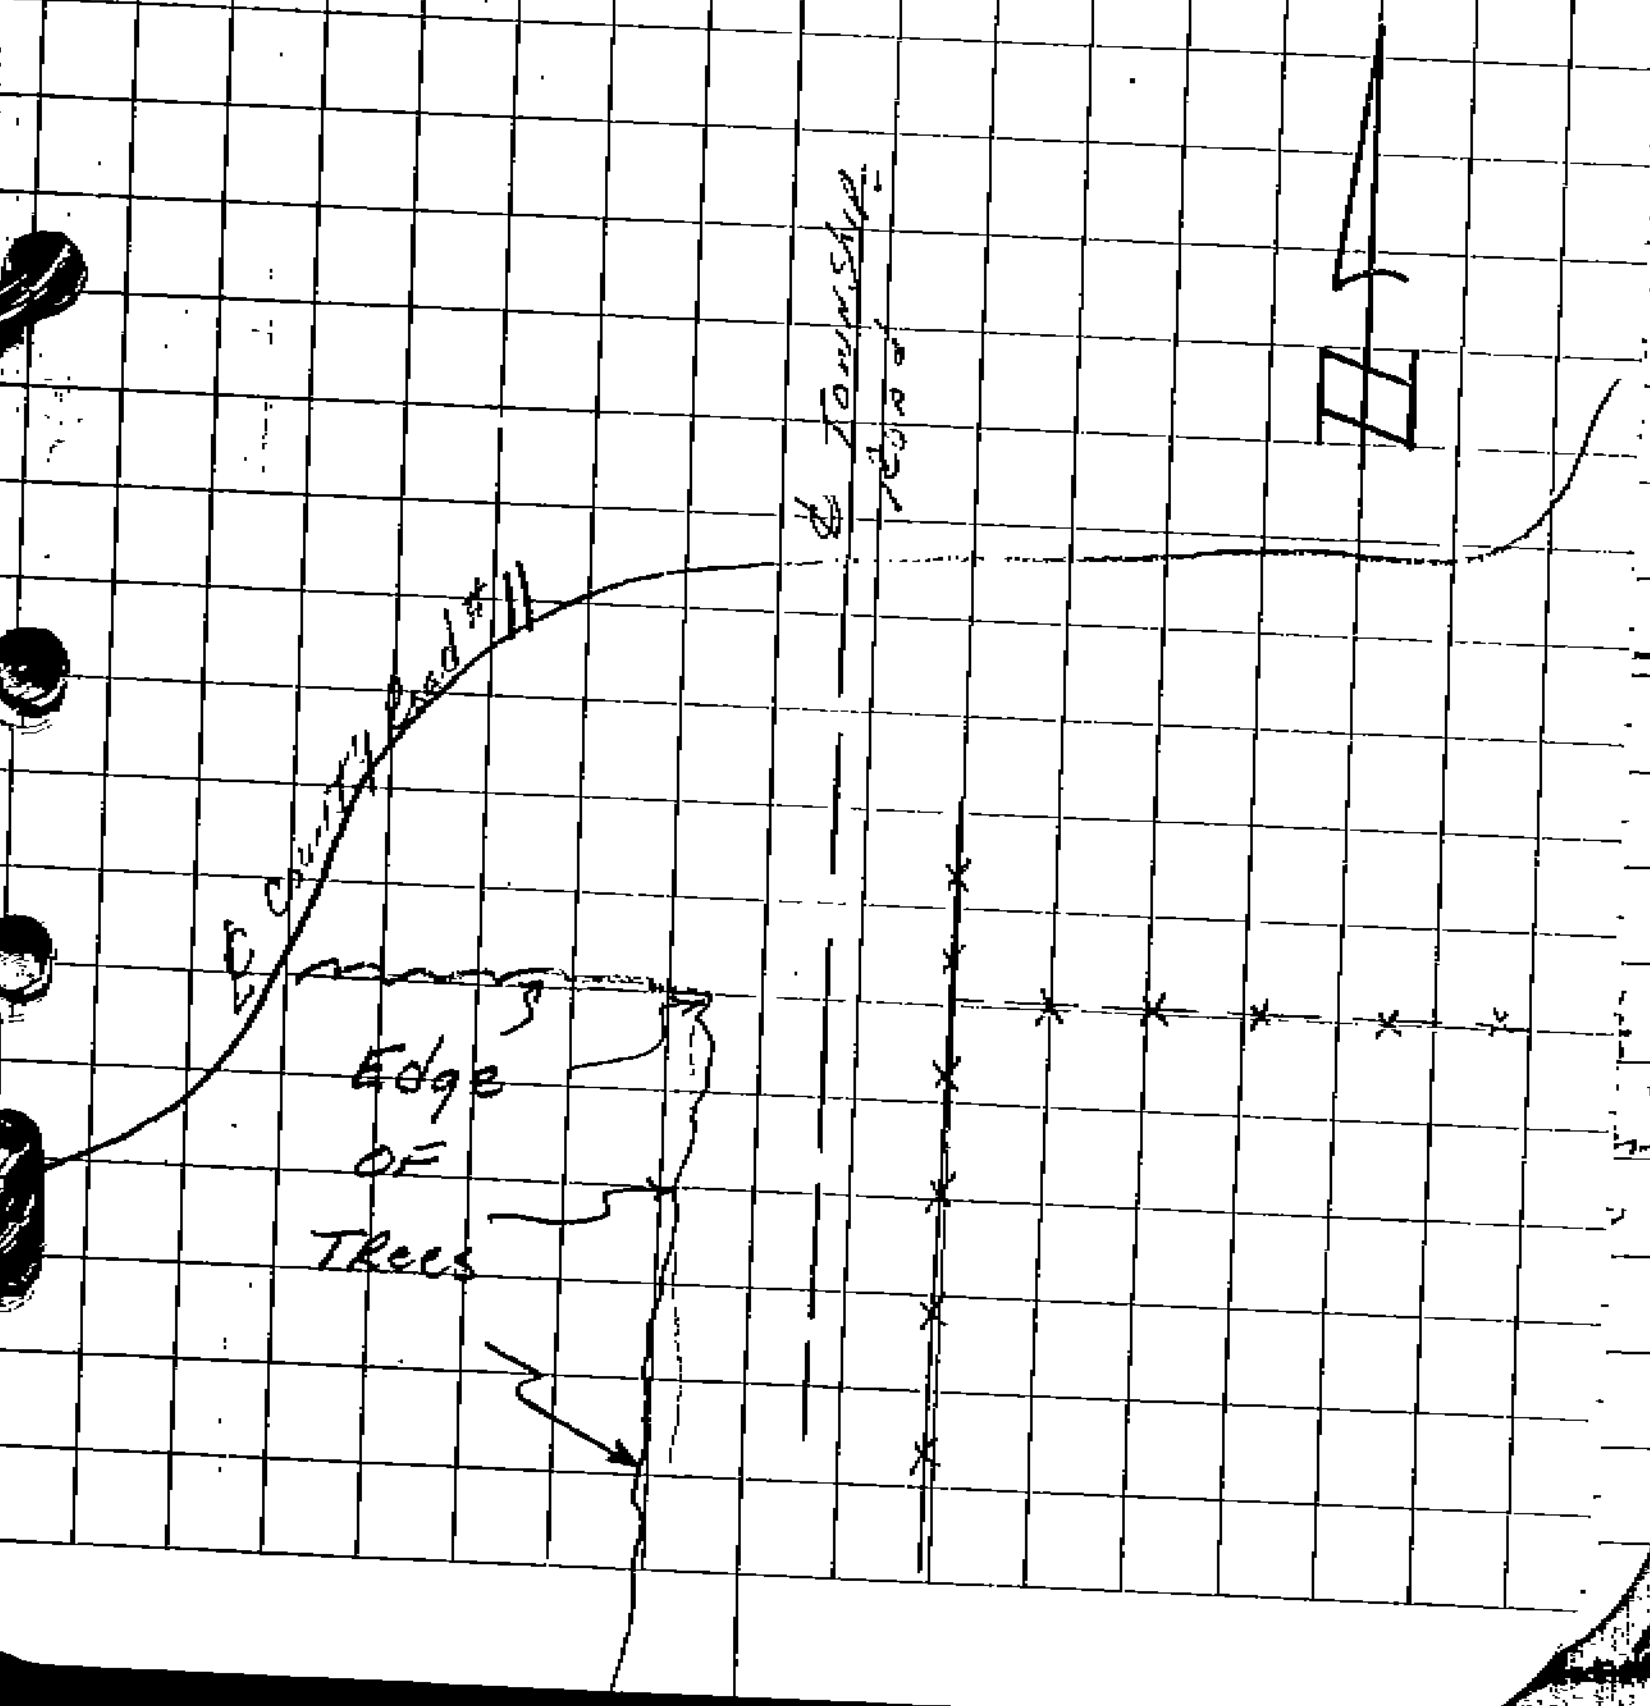

Sept 28, 1981

I TALKED TO HENRY Thölen who has lived in Their House By The River Near The Section Line Between Section 20 & 21 All of His Life, For 80 years He Told me The 1/4 corner Common To Sections 20-21 Should Be opposite The Fenceline Going East And on ℄ of The Road Going North & South –

Tom Garlinghouse

TIME SPENT 2 hours
MC ON EAST LINE
SECTION 20 ON North
Side OF RIVER P/A 9

JUNE 2, 1981
Tom Garlinghouse
Steve Blanich
Mark Betley

35

26' South To Edge of MISS River

Fd 1½" Pipe in place 0.3 Below Ground In Flood Plain

Nail in 5" poplar West 2^{98}

Nail in 6" poplar East 3^{55}

Nail in 30" Twin poplar NE 13^{05}

Post set in 1863; Post set 7 chains or 9

BT By R.K. Whiteley in 1899; Louis

Knudsen set 1½" Iron pipe in place in 1941

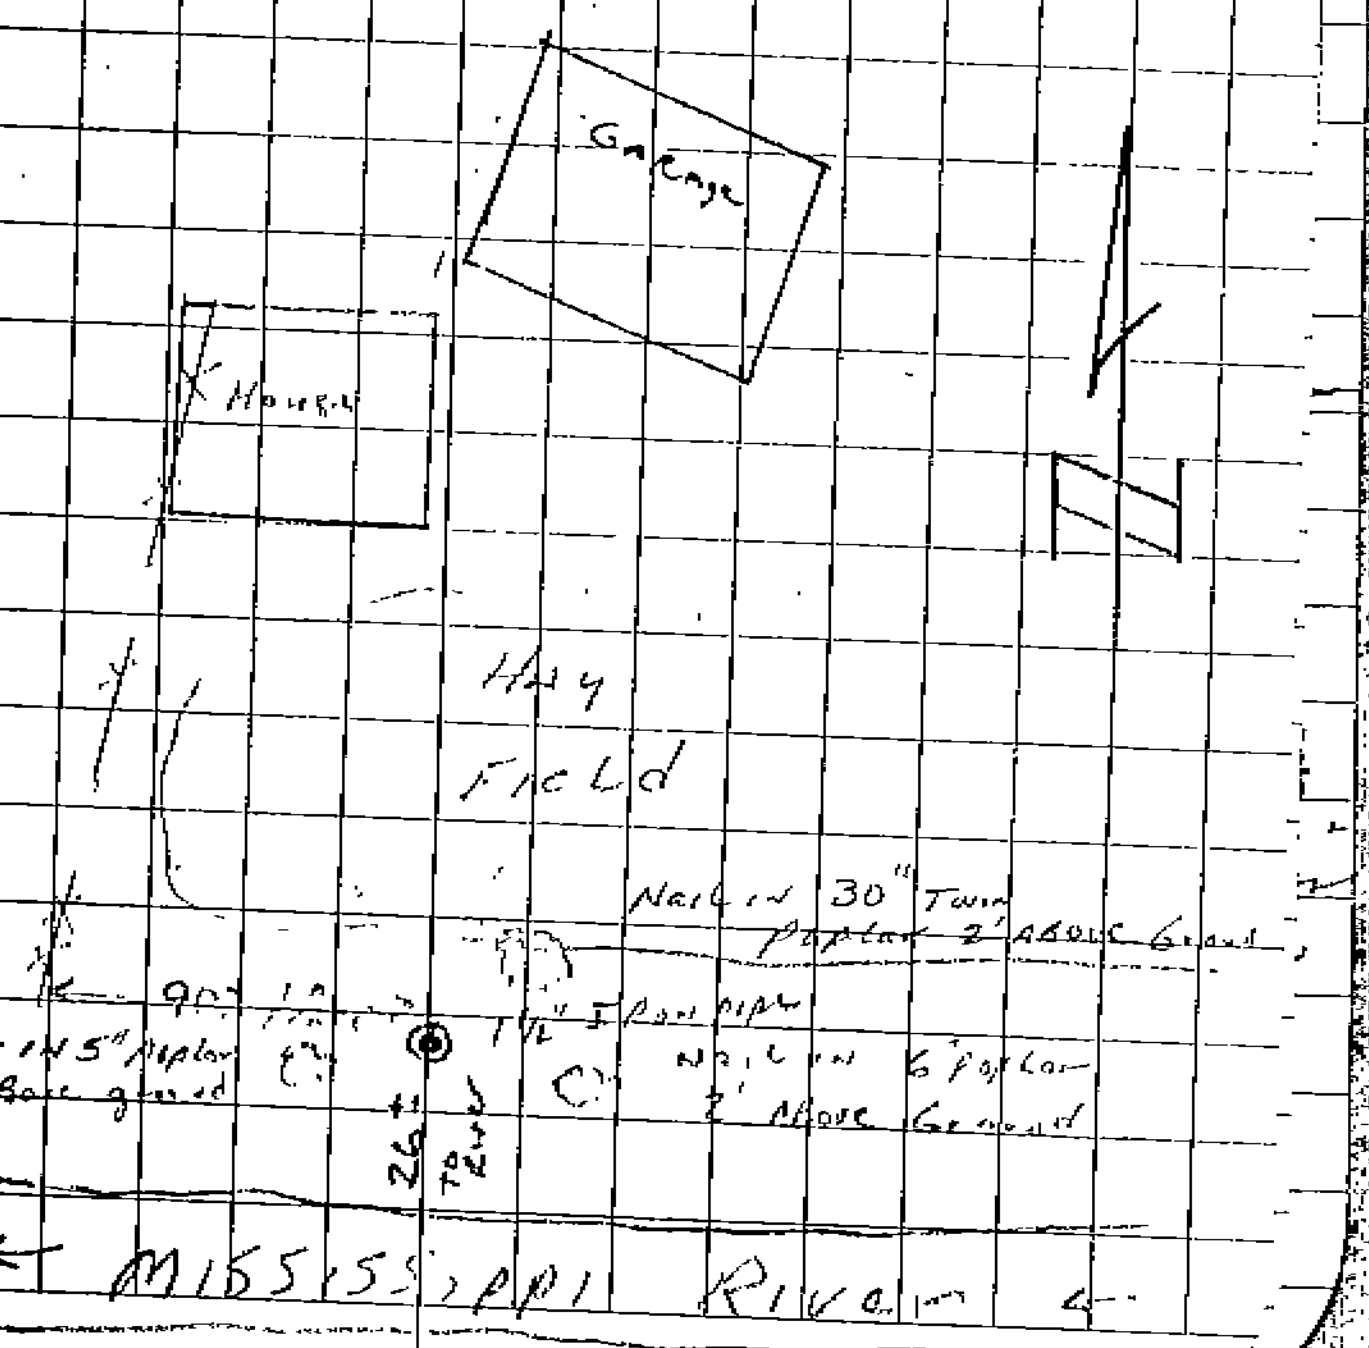
Garage
House
Hay
Field
Nail in 30" Twin Poplar 2' Above Ground
Nail in 5" poplar 2' Above ground
1½" Iron pipe
Nail in 6" poplar 2' Above Ground
26' to River
← MISSISSIPPI River ←

TIME SPENT 1 HOUR

County Common to Sections
16-17-20-21 – 136 – 25

June 2, 1981
Tom Gallagher
Steve Blanich
Mark Betley

Ⓢ 36

N-9

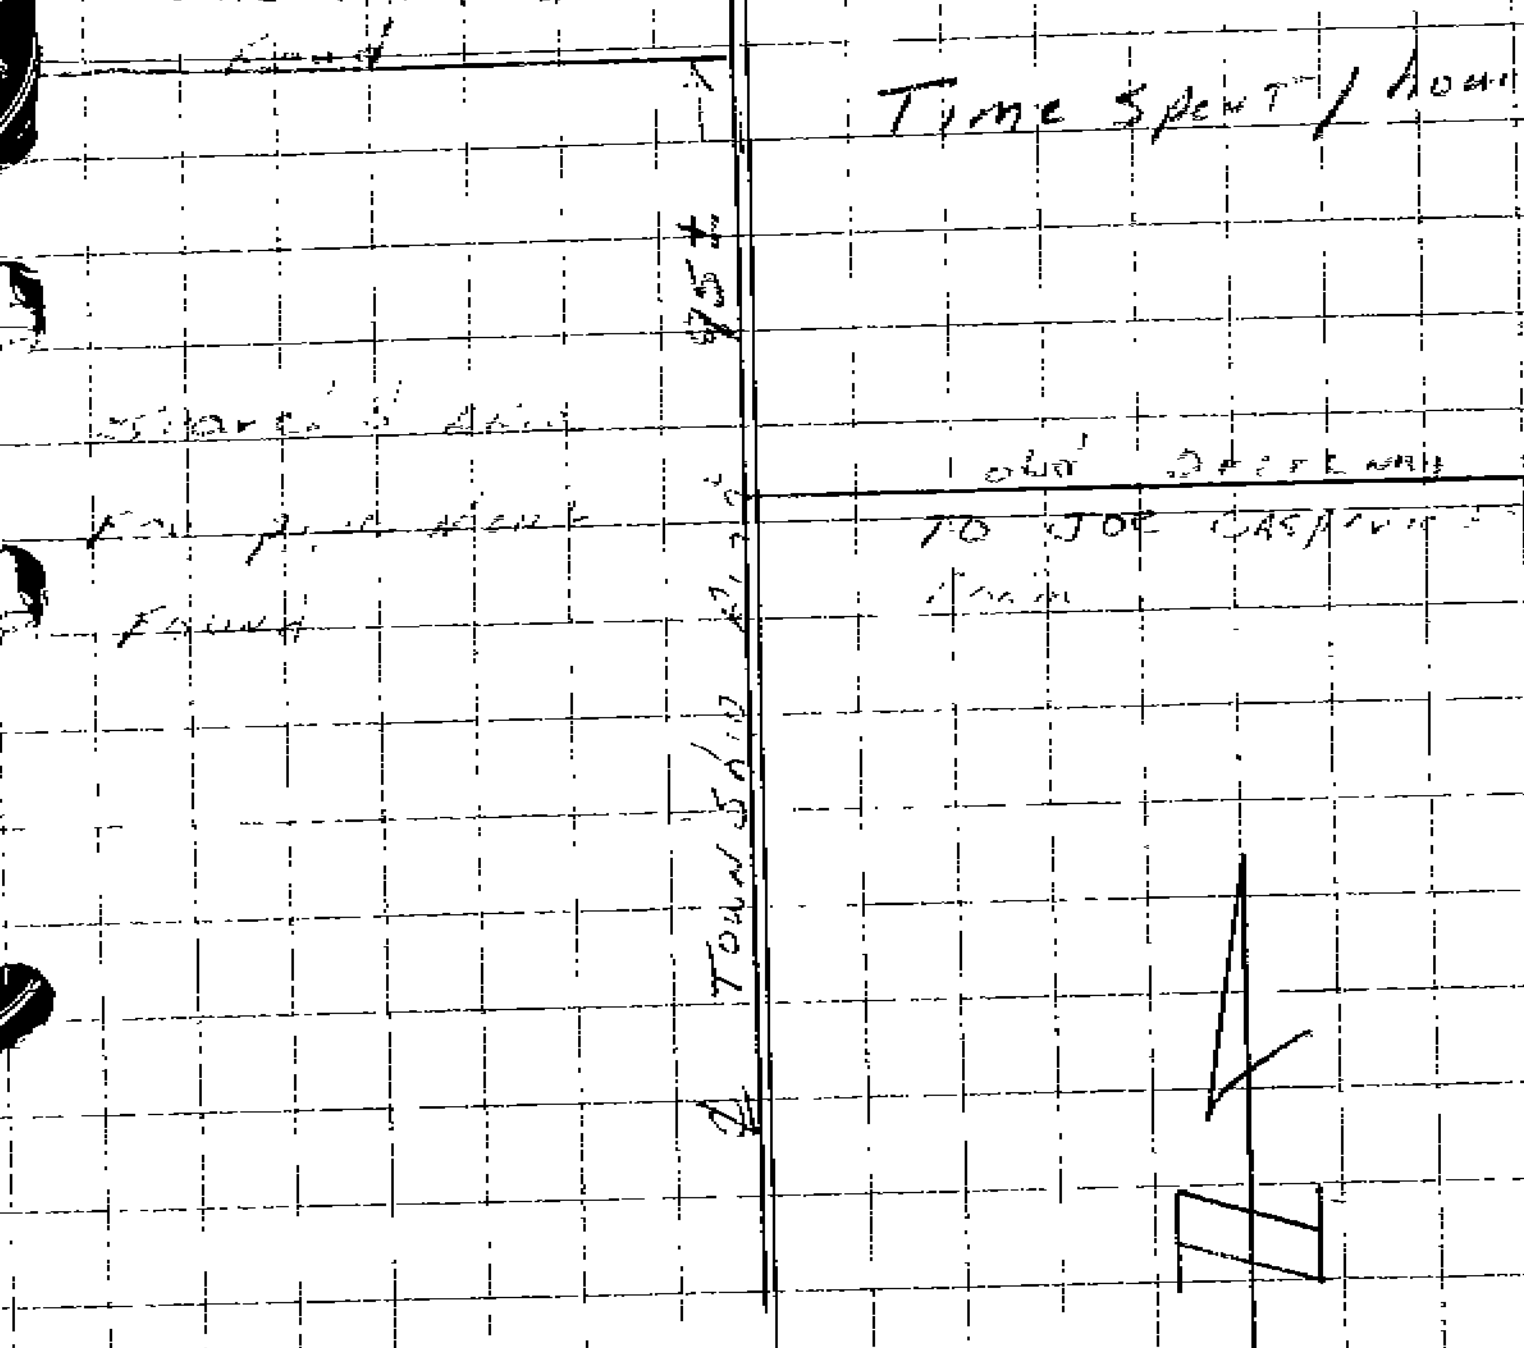

Post set in 1868; Reset in 1904
By L.E. Kinnison new BT's
In 1922 By Curk 3" x 24" stake
New Ties. In 1941 Louis Knutson
calls for ℄ N-S Road & Road being
East to be Corner – Set New BT's
(Timber dead) (See Reverse of
This page for Testimony)

NO. 447
TELEDYNE

June 2, 1981

I Talked To Bill Ticken And To Larry Kaspcrick who Both said The S.W. cor of Section 16 ? Was on The ℄ of The Driveway Going EAST To Joe Kaspericks old Farm which is Aprox. 100' South of The Dean Lake Access Road That goes WEST. (Bill & Larry are Both Aprox 70 yrs old) Tom Garlinghouse

Sept 28, 1981

I Talked To Henry Tholen, who is 80 yrs old, He Has Lived IN The Area All of His Life. He used to own The West 1/2 of The NW 1/4 of Section 21-136-25, He Also Said The NW Corner of Section 21-136-25 Was on ℄ of Casperick's old Driveway & ℄ of The Township Road.

Tom Garlinghouse

certified by D.N.R. 1986
Certificate # 342

Time spent 1½ hours June 2, 1981
Tom Garlinghouse ④
Steve Blonick
Mark Berley

N-7

Searched For evidence of monument @ N¼ cor Sec 20-136-25 Found Nothing. - Searched 200'± South of ℄ of Road To Landing

Post set in 1863; in 1922 J Curo set 2"x12" with witness corner stakes

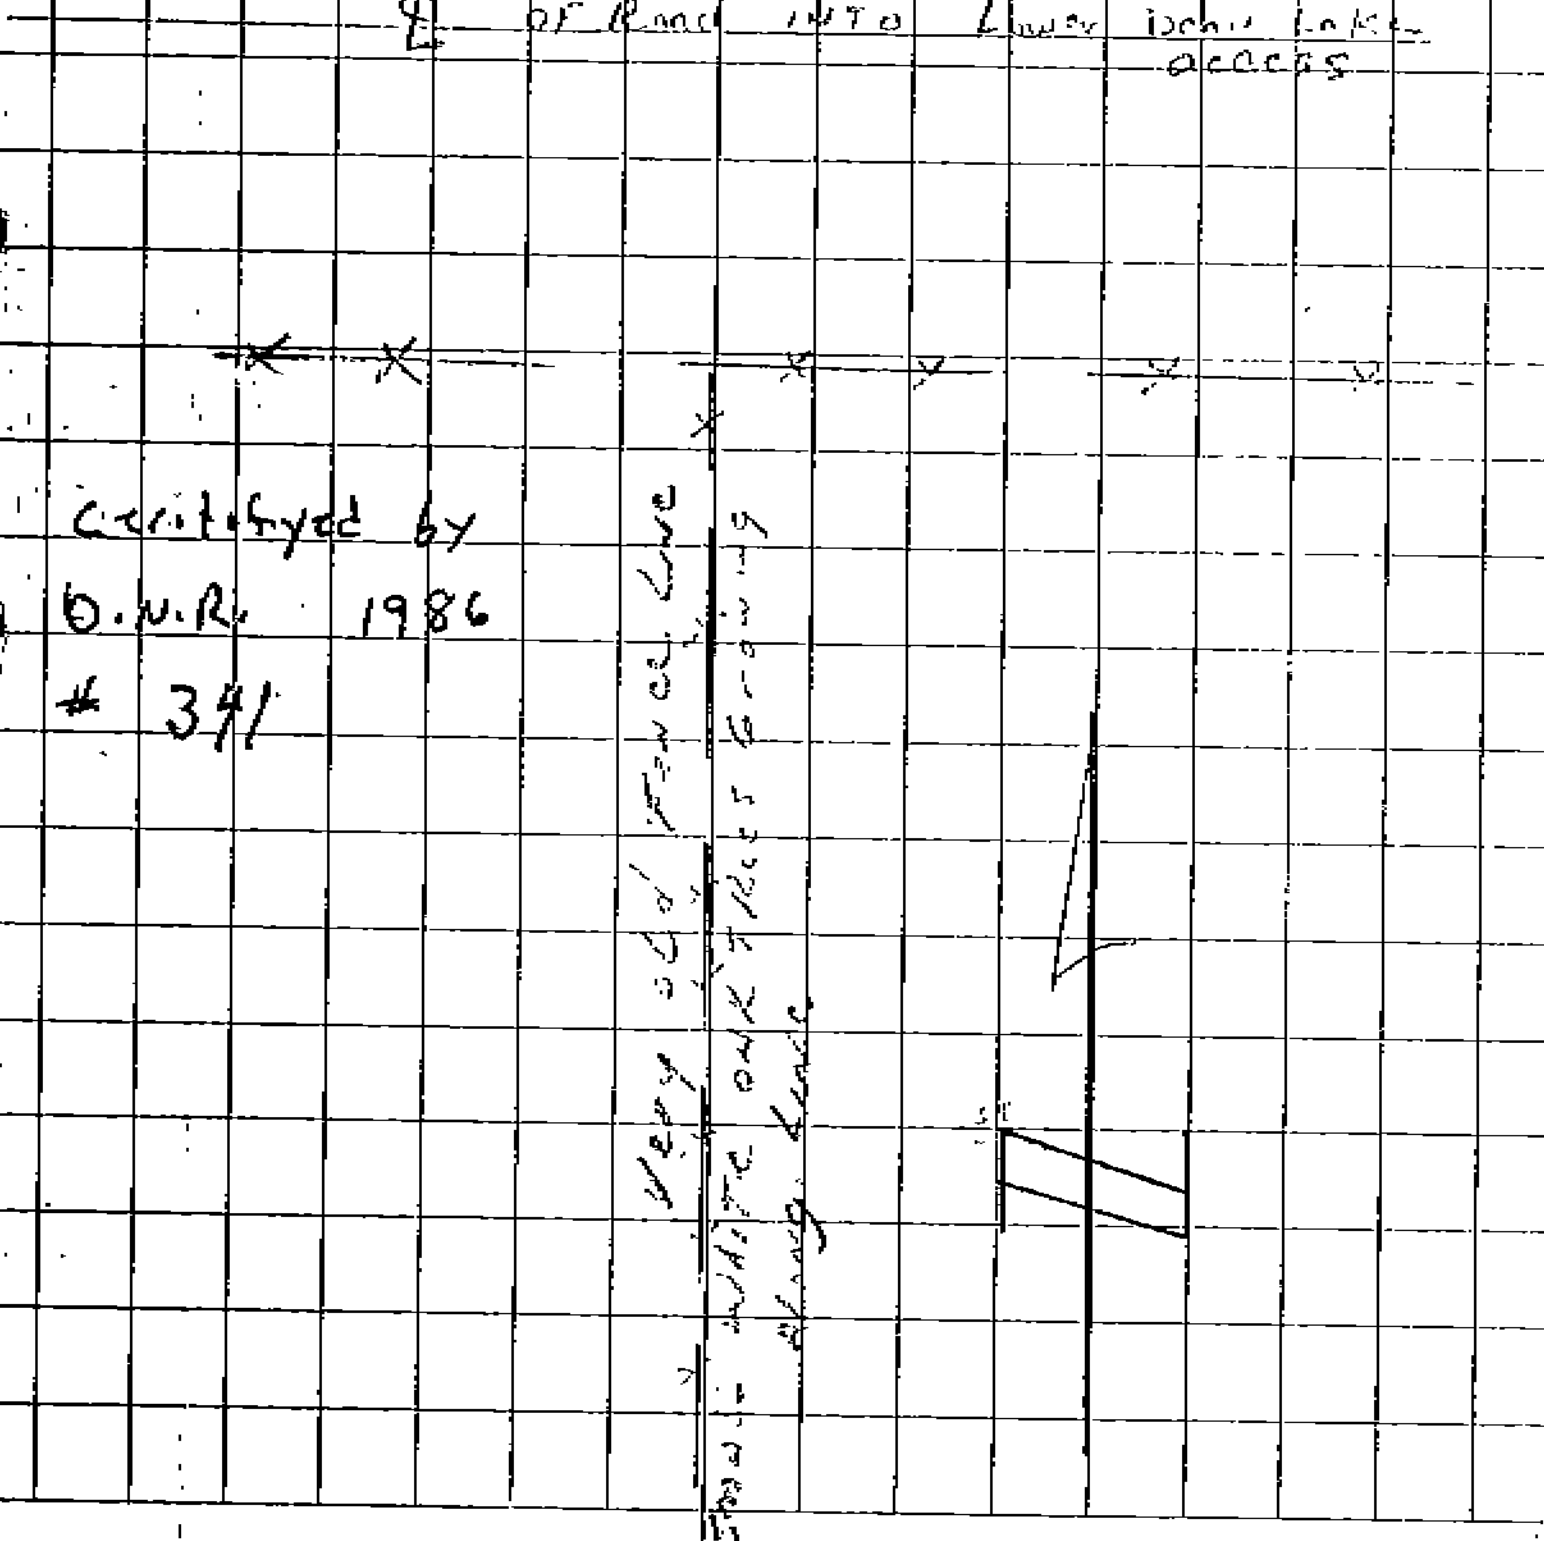
℄ of Road into Lower Dean Lake access
Very old Fence Line
small white oak trees growing along line

Certifyed by
D.N.R. 1986
341

TOM GarLinghouse
STeve Blanick
MARK BeTLey

JUNE 2, 1981

②
38

N-5 SECTION CorNer common TO
SECTIONS 19-20 - 18-17 136-25

Searched For CorNer No Monuments
Found. Time spent 1 hour

OriginaL CorNer set IN 1863
Post ; IN 1904 LE GARRISON
SeT Post ; IN 1922 J Curo Set
2" X 12" STAKE For A Temporary corNer
SeT New BT'S & witNess posts.

℄ Acces Road to Lower Dean LAKe

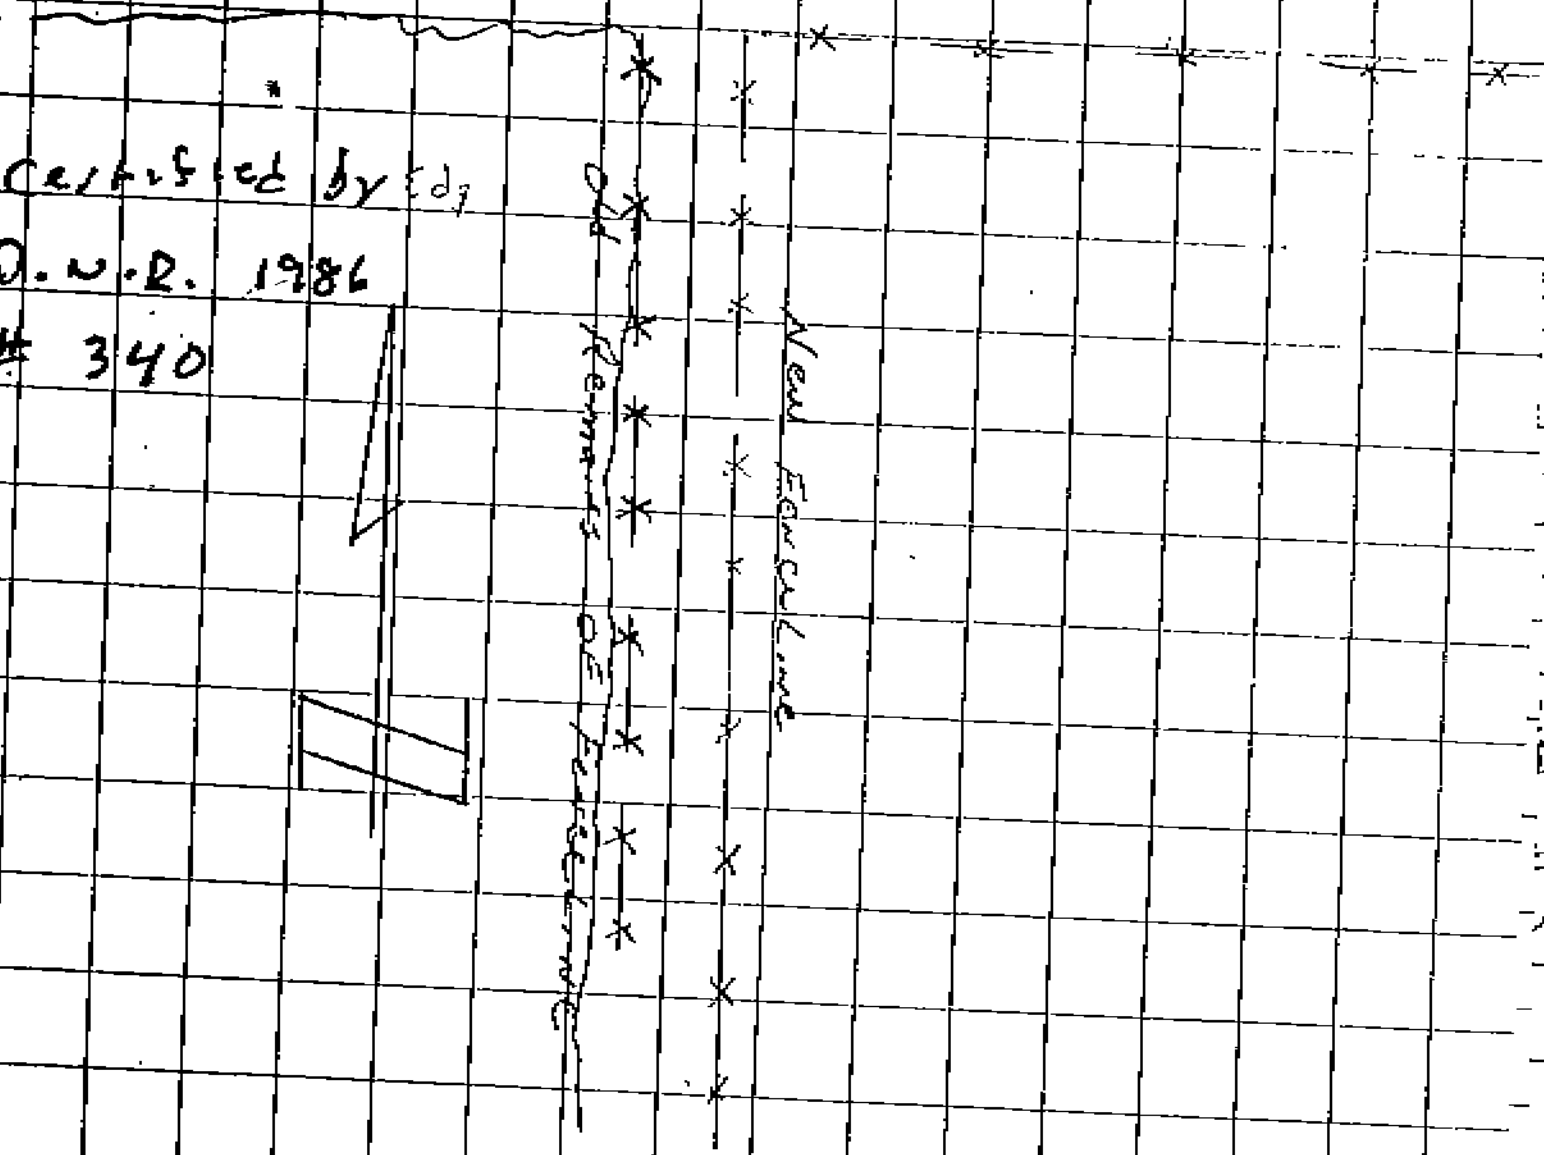

Certified by Edj
D.N.R. 1986
340

June 29, 1981
TOM GARLinghouse
Steve Blanich
Mark Betley

SW cor of
SECTION 15

SET 1/2" Pipe 2' Long at Fence Corner in Corner of Field

Nail in 6" poplar NW 24.25
Nail in 6" poplar S/SE 26.29
Nail in 3" poplar West 28.40
All ties are approx 2' above Ground

Talked to Pete Burgstaller (FRANK Sr.) who said the stake was at the Fence corner –

Time spent: 2 hours
See page 9 for sketch.

Post set in 1853 in 1904 L.E. Garrison
set post 19.41 ch North of M.C.
In 1921 J Card set 2" x 20" stake
From orig BT stump. New BTs set.

NO. 447
TELEDYNE

JUNE 5,
TOM GARLINGHOUSE
STEVE BLANICH

SW COR OF SEC 15
N-13

⑨
40

Searched For Monument
No Corner Found.
Time Spent 1 hour plus 1 hr page 8
TOTAL TIME = 2 hr

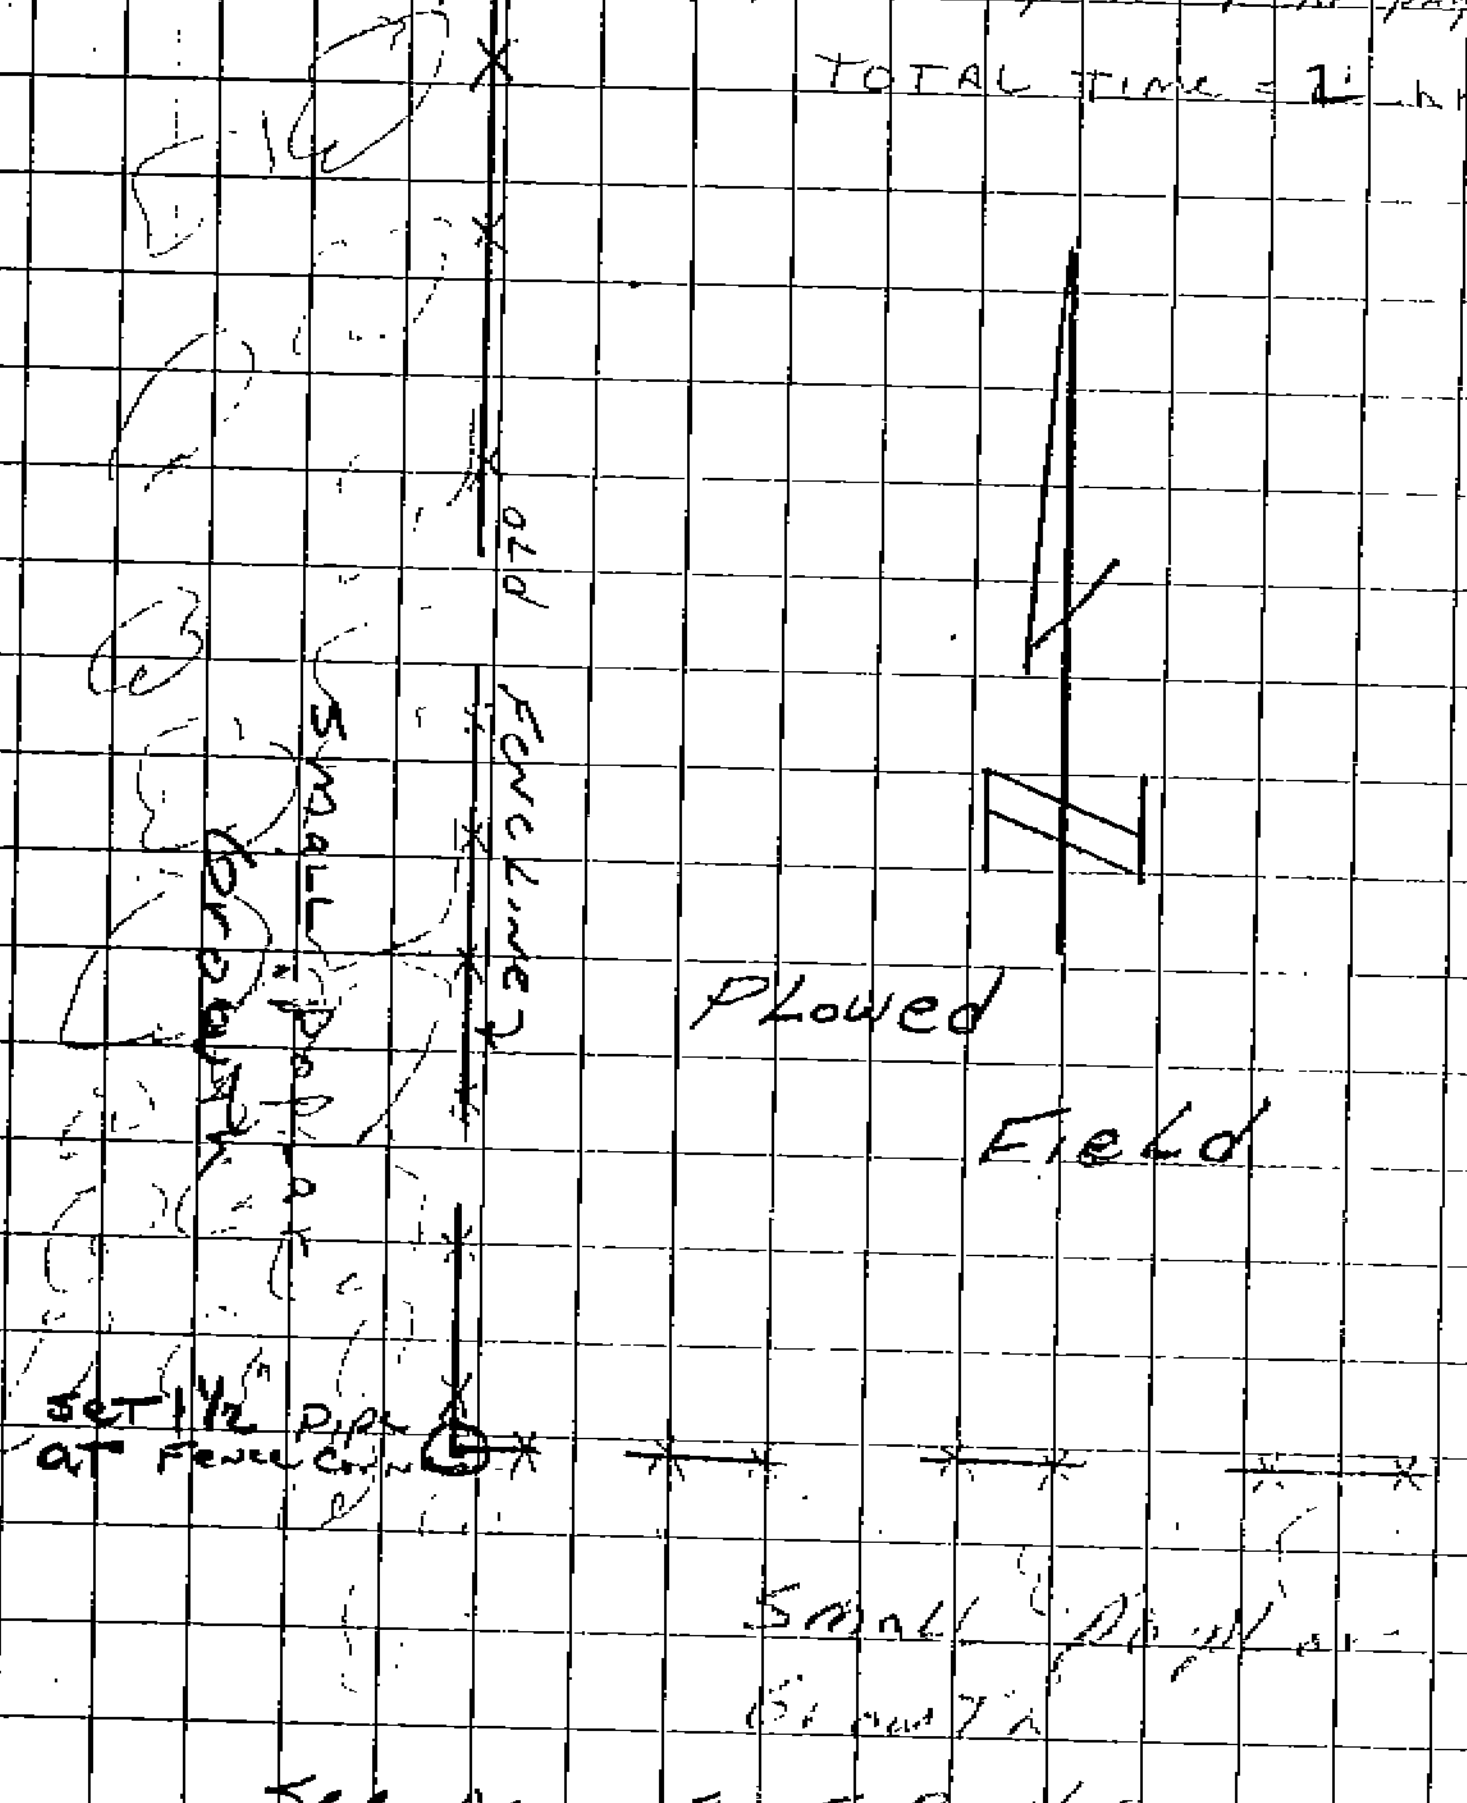

See page 8 FOR NOTES

June 5, 1981
Tom Gaelinghouse Sgn
Steve Blawick

Corner Common
Sections 8-9-17-16
136 — 25

~~40~~ 41

Time Spent 2 hours

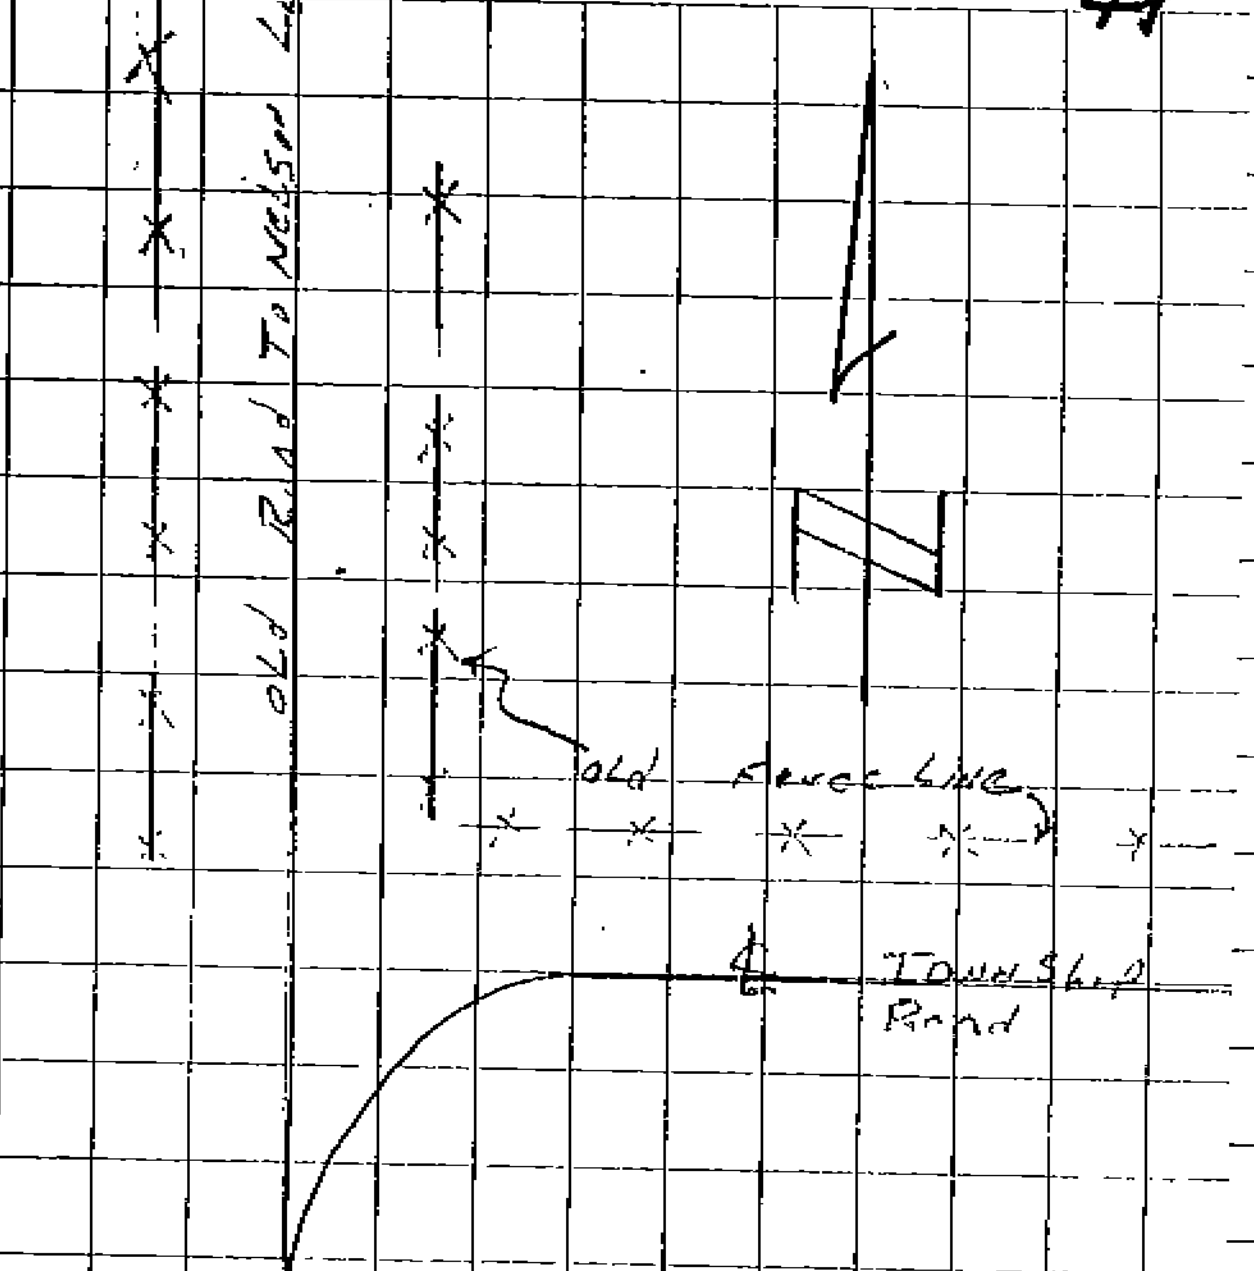

Searched for Monument
None Found

Post Set in 1863; Post Set in
1904 From Orig BTS By LE Garrison
in 1922 J Curo Set 2"x20" stake
And New BTS; Corner Relocated in
1942 By Knudson — No BTS

Certified by D.N.R. 1980
certificate # 337

Tom Garlinghouse
Steve Blanich
Mark Betley

J-11

June 29, 1981

1/4 cor common to Sections 9 & 16 - 136 - 25

Nail & Bottle cap in 3' White Oak SW 57^{50}
Nail & Bottle cap in 14" White Oak SW/W 53^{85}
Nail & Bottle cap in power pole North 30^{35}

Set 2" x 12" Iron pipe in ℄ Township Road & Extended Fence Line Going South.

I Talked to Pete Burgstaller (Frank Sr.) about This Corner, who said That It was supposed to be At The intersection of The Fence going South and ℄ of The Township Road going East & West.

Post set in 1863; L.E. Garrison Set Post in 1904. In 1922 J Cuko set a 2"x20" stake with Big Trees.

See Page 12 For Sketch

NO. 447 TELEDYNE

Tom Garlinghouse
Steve Blanich
June 5, 1981

J-11

~~42~~
43

1/4 Cor Common to Sections 9 & 16 13S-25

Searched for Monument
None Found

Time Spent 3 Hours
+ 2½ Hours
5½ Hours
SEE pg. 42

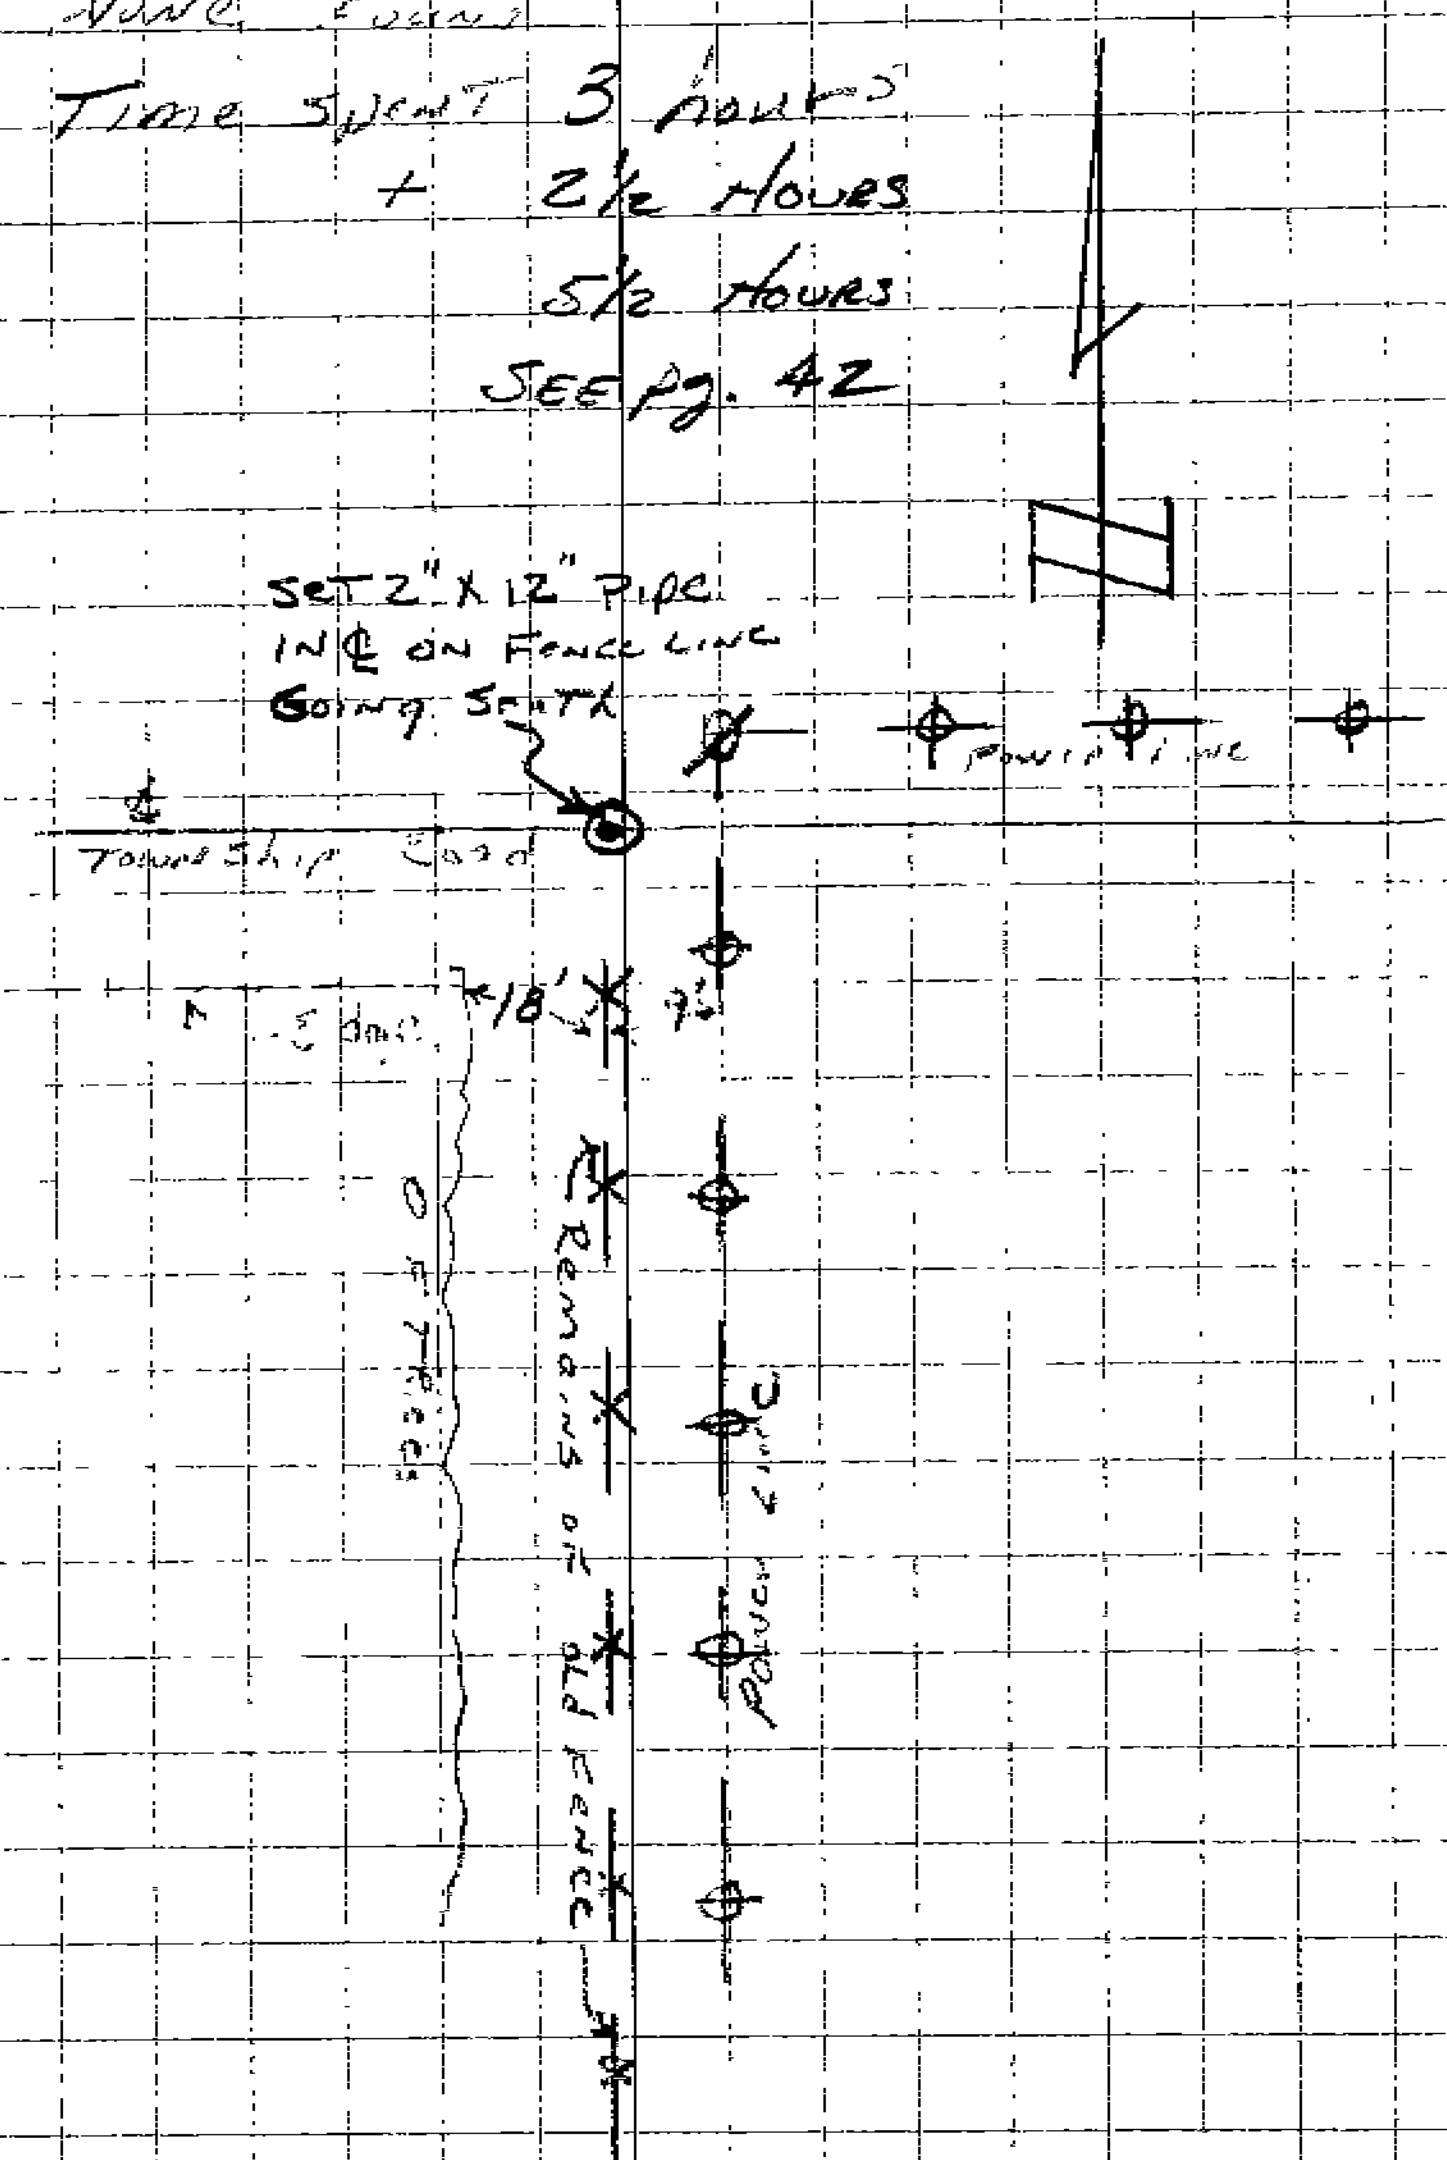
SET 2" X 12" PIPE IN ℄ ON FENCE LINE GOING SOUTH

Tom Garlinghouse Corner common to
Steve Blanich sections 9-10-15-16
Mark Betley T13S-R25
June 29, 1981 J-13

Set 2" x 12' Pipe on ℄ and
Extended Fence Line going North.
Set Pipe 2E Below [illegible]
2' Nail
Nail & cap in power pole NE $65^{\underline{35}}$
3' [illegible]
Nail & cap in Fence Post North $18^{\underline{95}}$
Nail & cap in Fence Post N.W. $31^{\underline{50}}$

Post set in 1863 w/ BTs
In 1904 L.E. Garrison set post
in March. In 1922 J Curo set
3/4" x 10" Iron for temp corner.
In 1942 Louis [illegible] set said post
in line with fence going North —

See sketch & testimony on
page 44.

Tom Garlinghouse
Steve Blawick
June 5, 981
J-13

See Page 13

Time Spent 3 hours

Corner common To Sections
9-10-16 & 15
T 136-25.

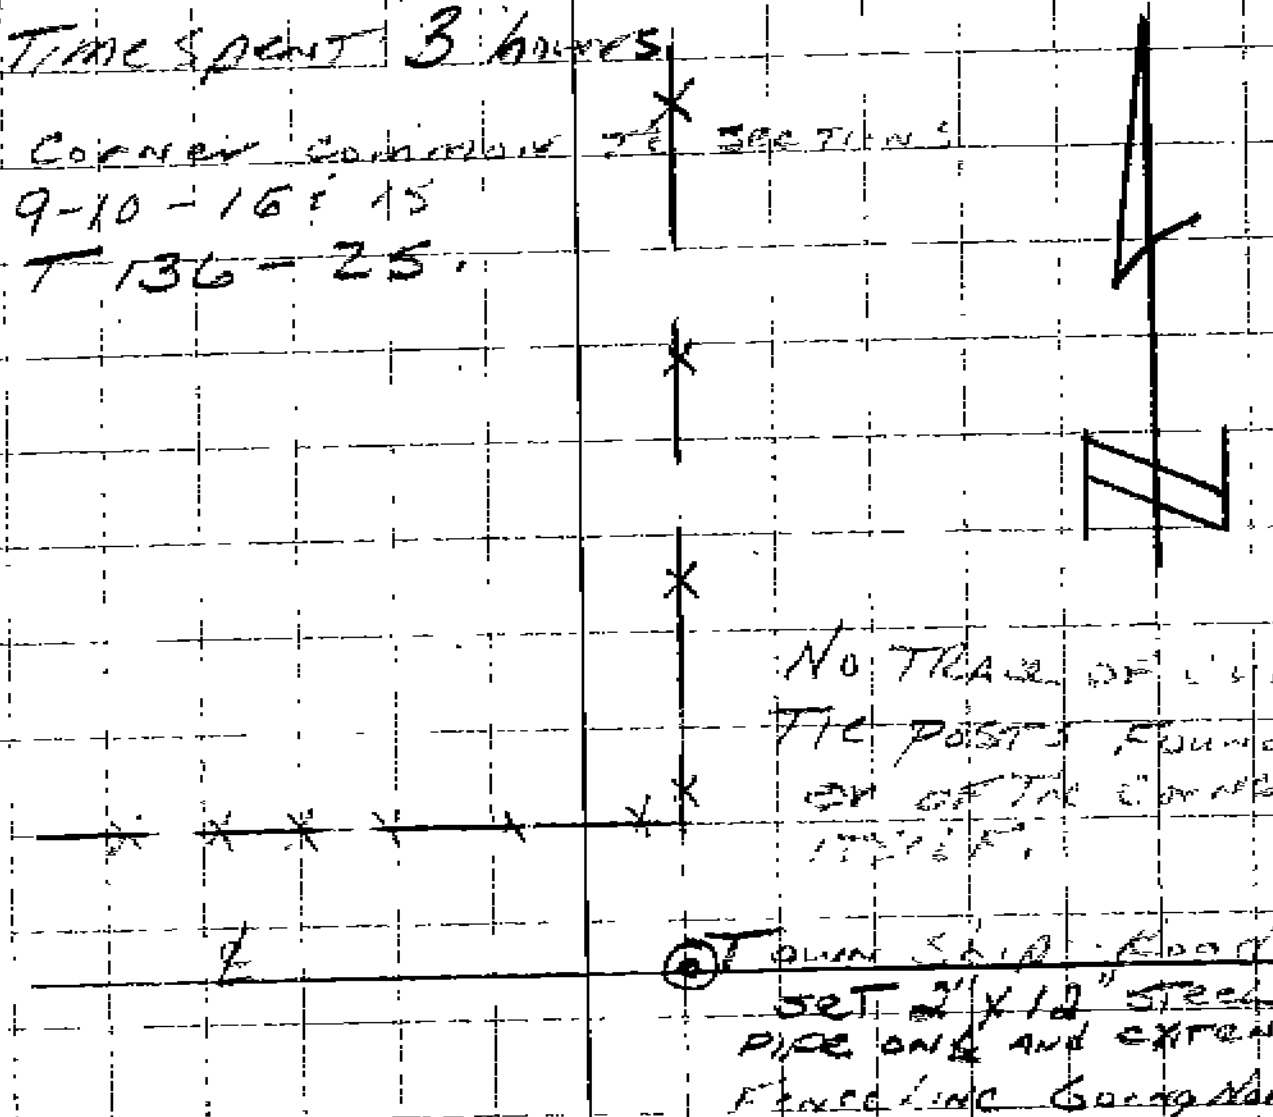

No Trace of cross Tie posts Found on of The corner [illegible].

Township Road

Set 2"x12" steel pipe on & and extended Fenceline Going North

I Talked To Pete Burgstaller About This corner. He grew up on The Farm in The NE NE Sec 16-136-25. He Said That He Had [illegible] on a steel [illegible] at The NE corner of Sec 16 with The Road Grader many years ago But The fence going North is right on The [illegible] side. We Searched [illegible] The Location [illegible] Trace of The corner.

Tom Garlinghouse

June 5, 1981
Tom Garlinghouse
Steve Blanich

Quarter Corner
Common to Sections
10-15-136-25
J-15

~~45~~ 46

Fd 1½" Steel Pipe 1' Below Surface Road

Nail in Fence post North $23^{\underline{73}}$

Nail in Fence post N. 55° W $54^{\underline{59}}$

Nail in Fence post N. 40° E $42^{\underline{90}}$

Time Spent 1 hour

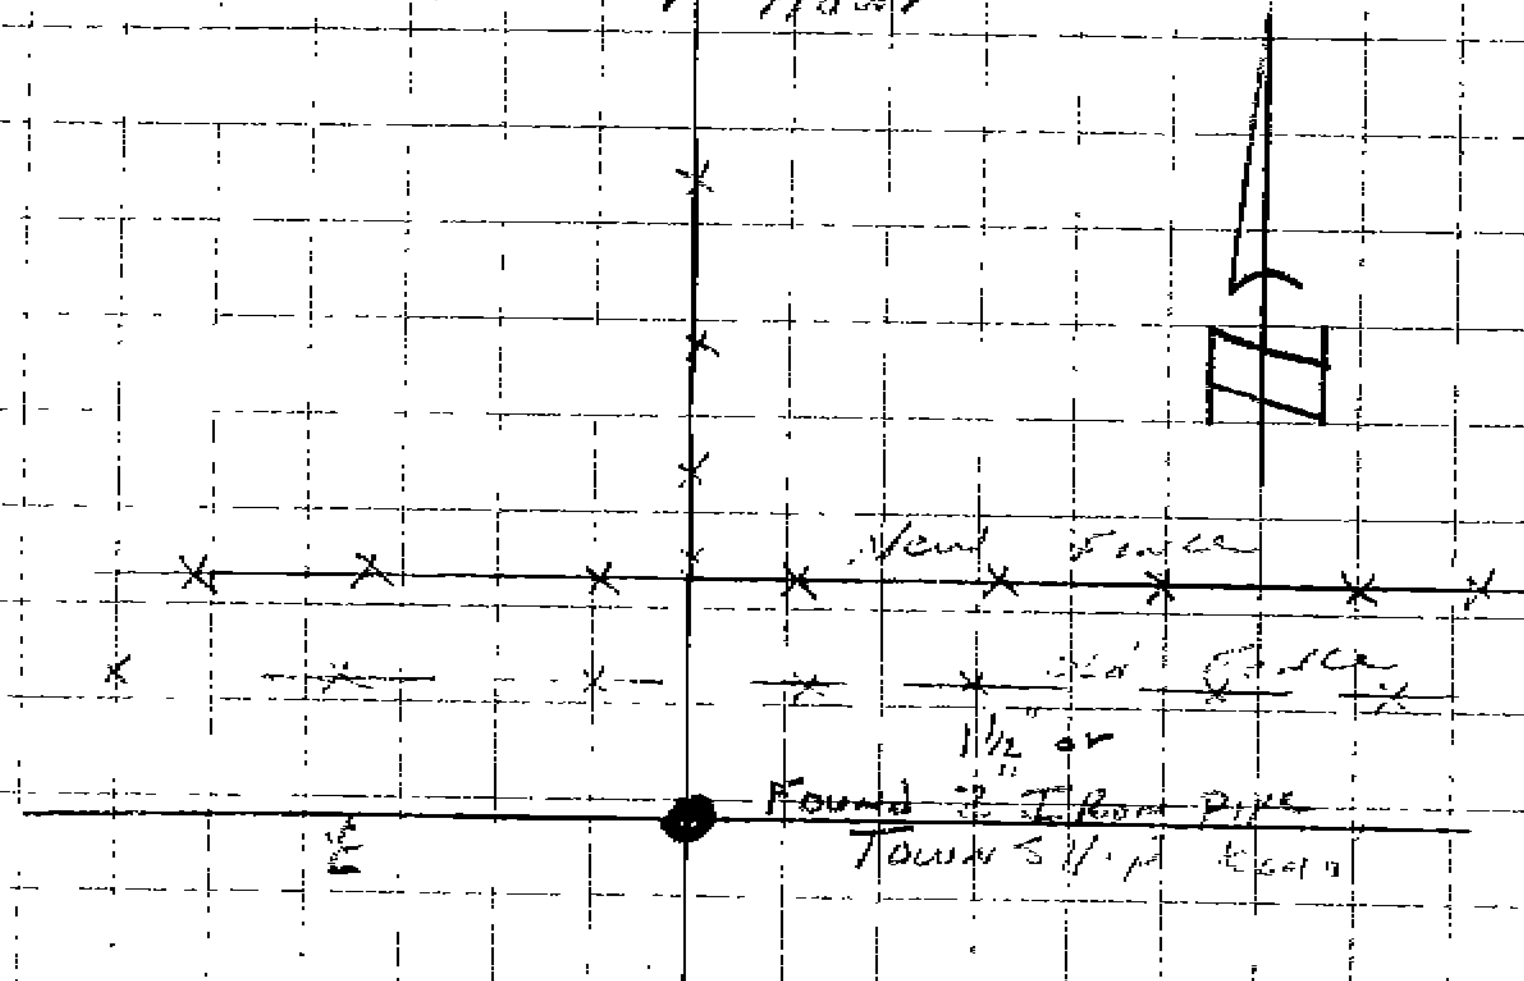

Post set in 1883; in 1922 J Curo set 3/4"x10" Iron 4 pts.
in 1942 [illegible] [illegible] set 1½" Iron Pipe

TELEDYNE NO. 447

Tom Garlinghouse
Steve Blanick

Sec 10-11-15-14
T 136-25
J-17

⑯ 47

Ties To 3/4" Solid Pin	0^{5} Below Surface in ℄ Road	
Nail in Power Pole	N 60 E	64^{01}
Nail in Fence Post	N-25 W	30^{09}
Nail in Fence Post	N 60 W	45^{13}

All Tie Nails Aprox 2' Above Ground

Time Spent. 1 hour

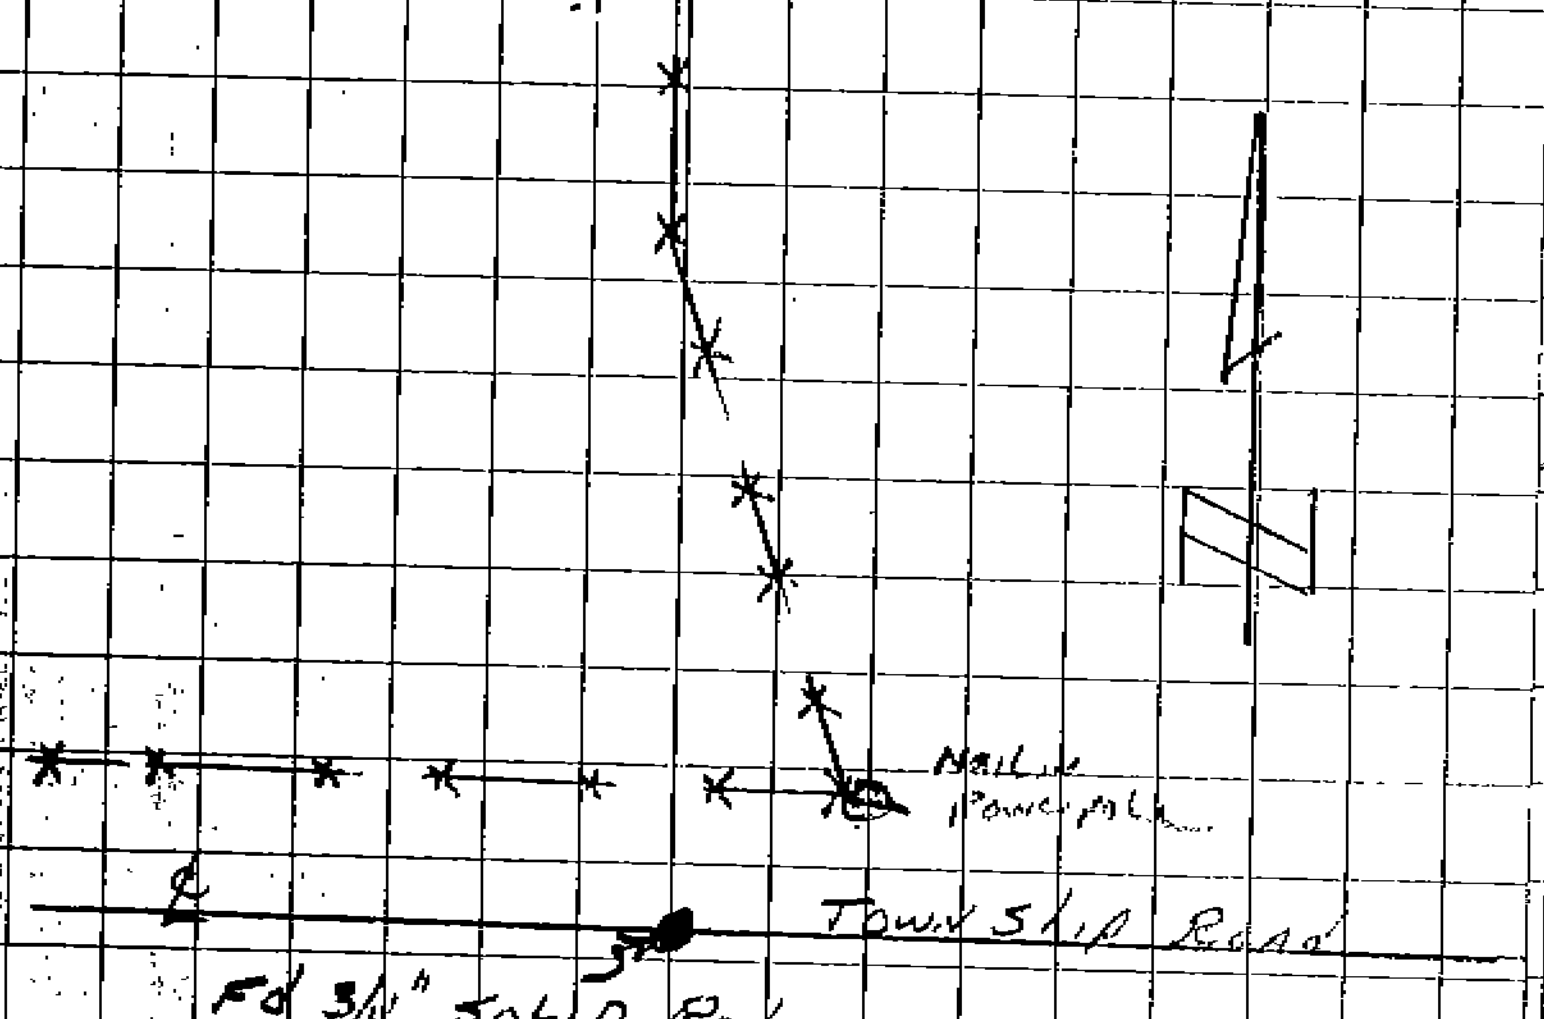

Fd 3/4" Solid Rod
in ℄ Road

In 1863 Post Set; In 1904 L E Garrison Set Post From Orig BT's
In 1922 J Curo Set 3/4" x 10' Temp Corner And BT's; In 1942 Louis Knudsen either Set or Found 3/4" Iron Pin 1' Below Surface.

CORNER COMMON TO
SECTIONS 11-12-13-14
T 136-25

J-21.

JUNE 10, 1981
TOM GARLINGHOUSE
STEVE BLANICK

IN 1863 POST SET; IN 1899 R.K. WHITELEY SET POST; IN 1922 J. CURO SET 3/4" x 10" IRON, ALSO SET BT'S

TIME SPENT 2 HOURS

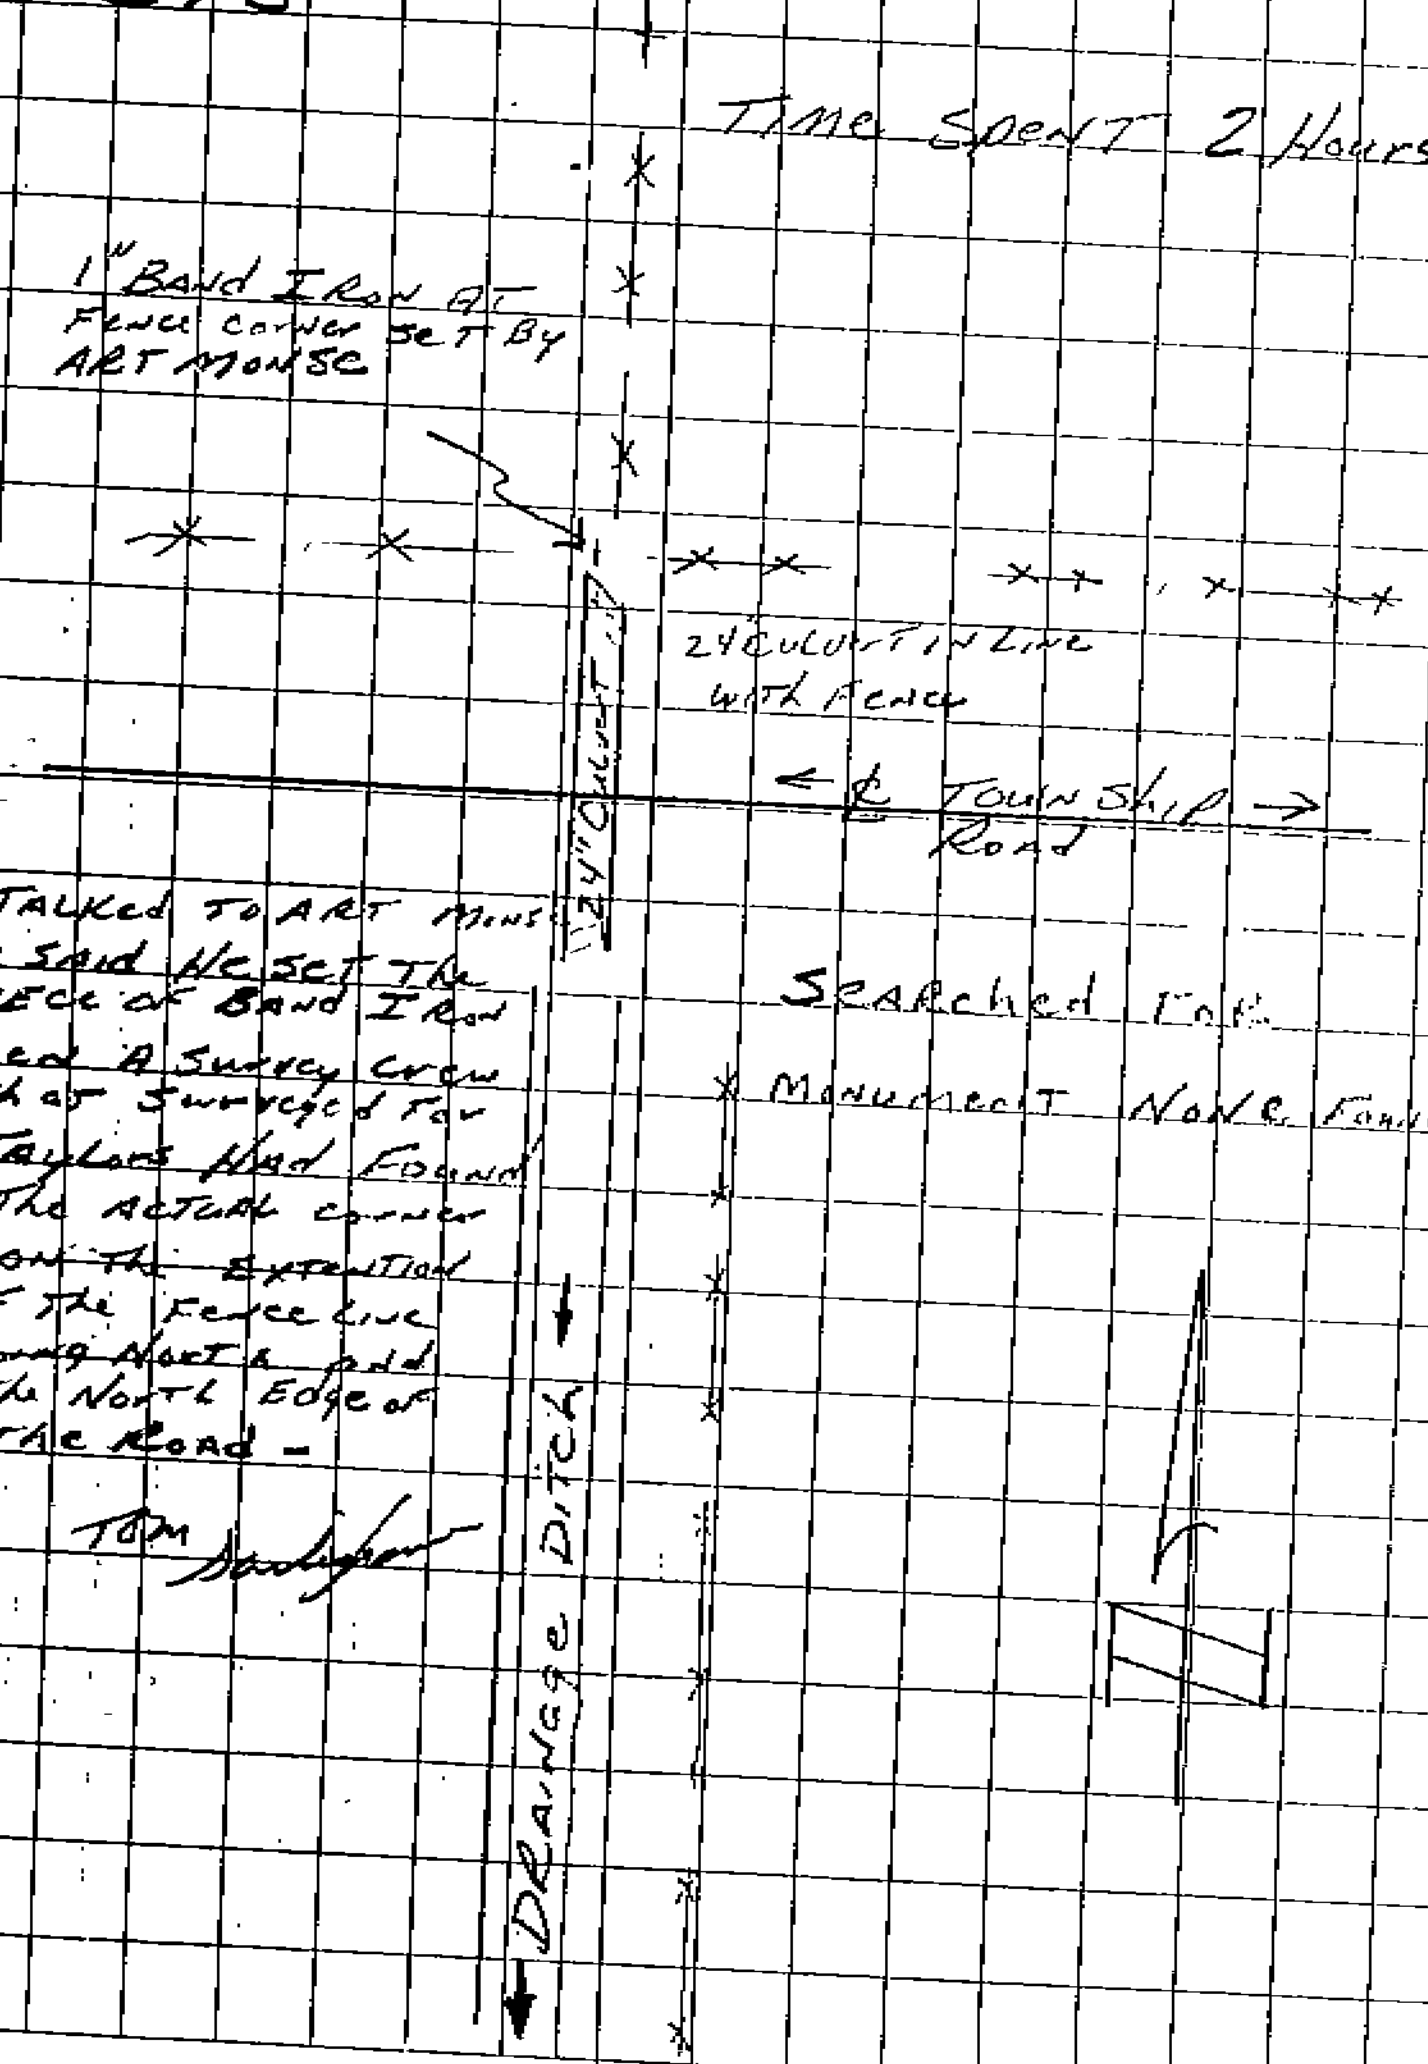
1" BAND IRON AT FENCE CORNER SET BY ART MONSE
24" CULVERT IN LINE WITH FENCE
24" CULVERT
← ℄ TOWNSHIP ROAD →
DRAINAGE DITCH
SEARCHED FOR MONUMENT NONE FOUND

TALKED TO ART MONSE HE SAID HE SET THE PIECE OF BAND IRON WHEN A SURVEY CREW THAT SURVEYED FOR TAYLORS HAD FOUND THE ACTUAL CORNER ON THE EXTENTION OF THE FENCE LINE GOING NORTH AND THE NORTH EDGE OF THE ROAD -

TOM Garlinghouse

TOM GARLINGHOUSE
STEVE BLANICH
MARK BETLEY

J-23

June 10, 1981

~~18~~ 49

QUARTER CORNER COMMON TO SECTIONS 12 & 13 - 136-25

POST SET IN 1863;
IN 1904 LE GARRison
Fd post in place

Time Spent 2 Hour

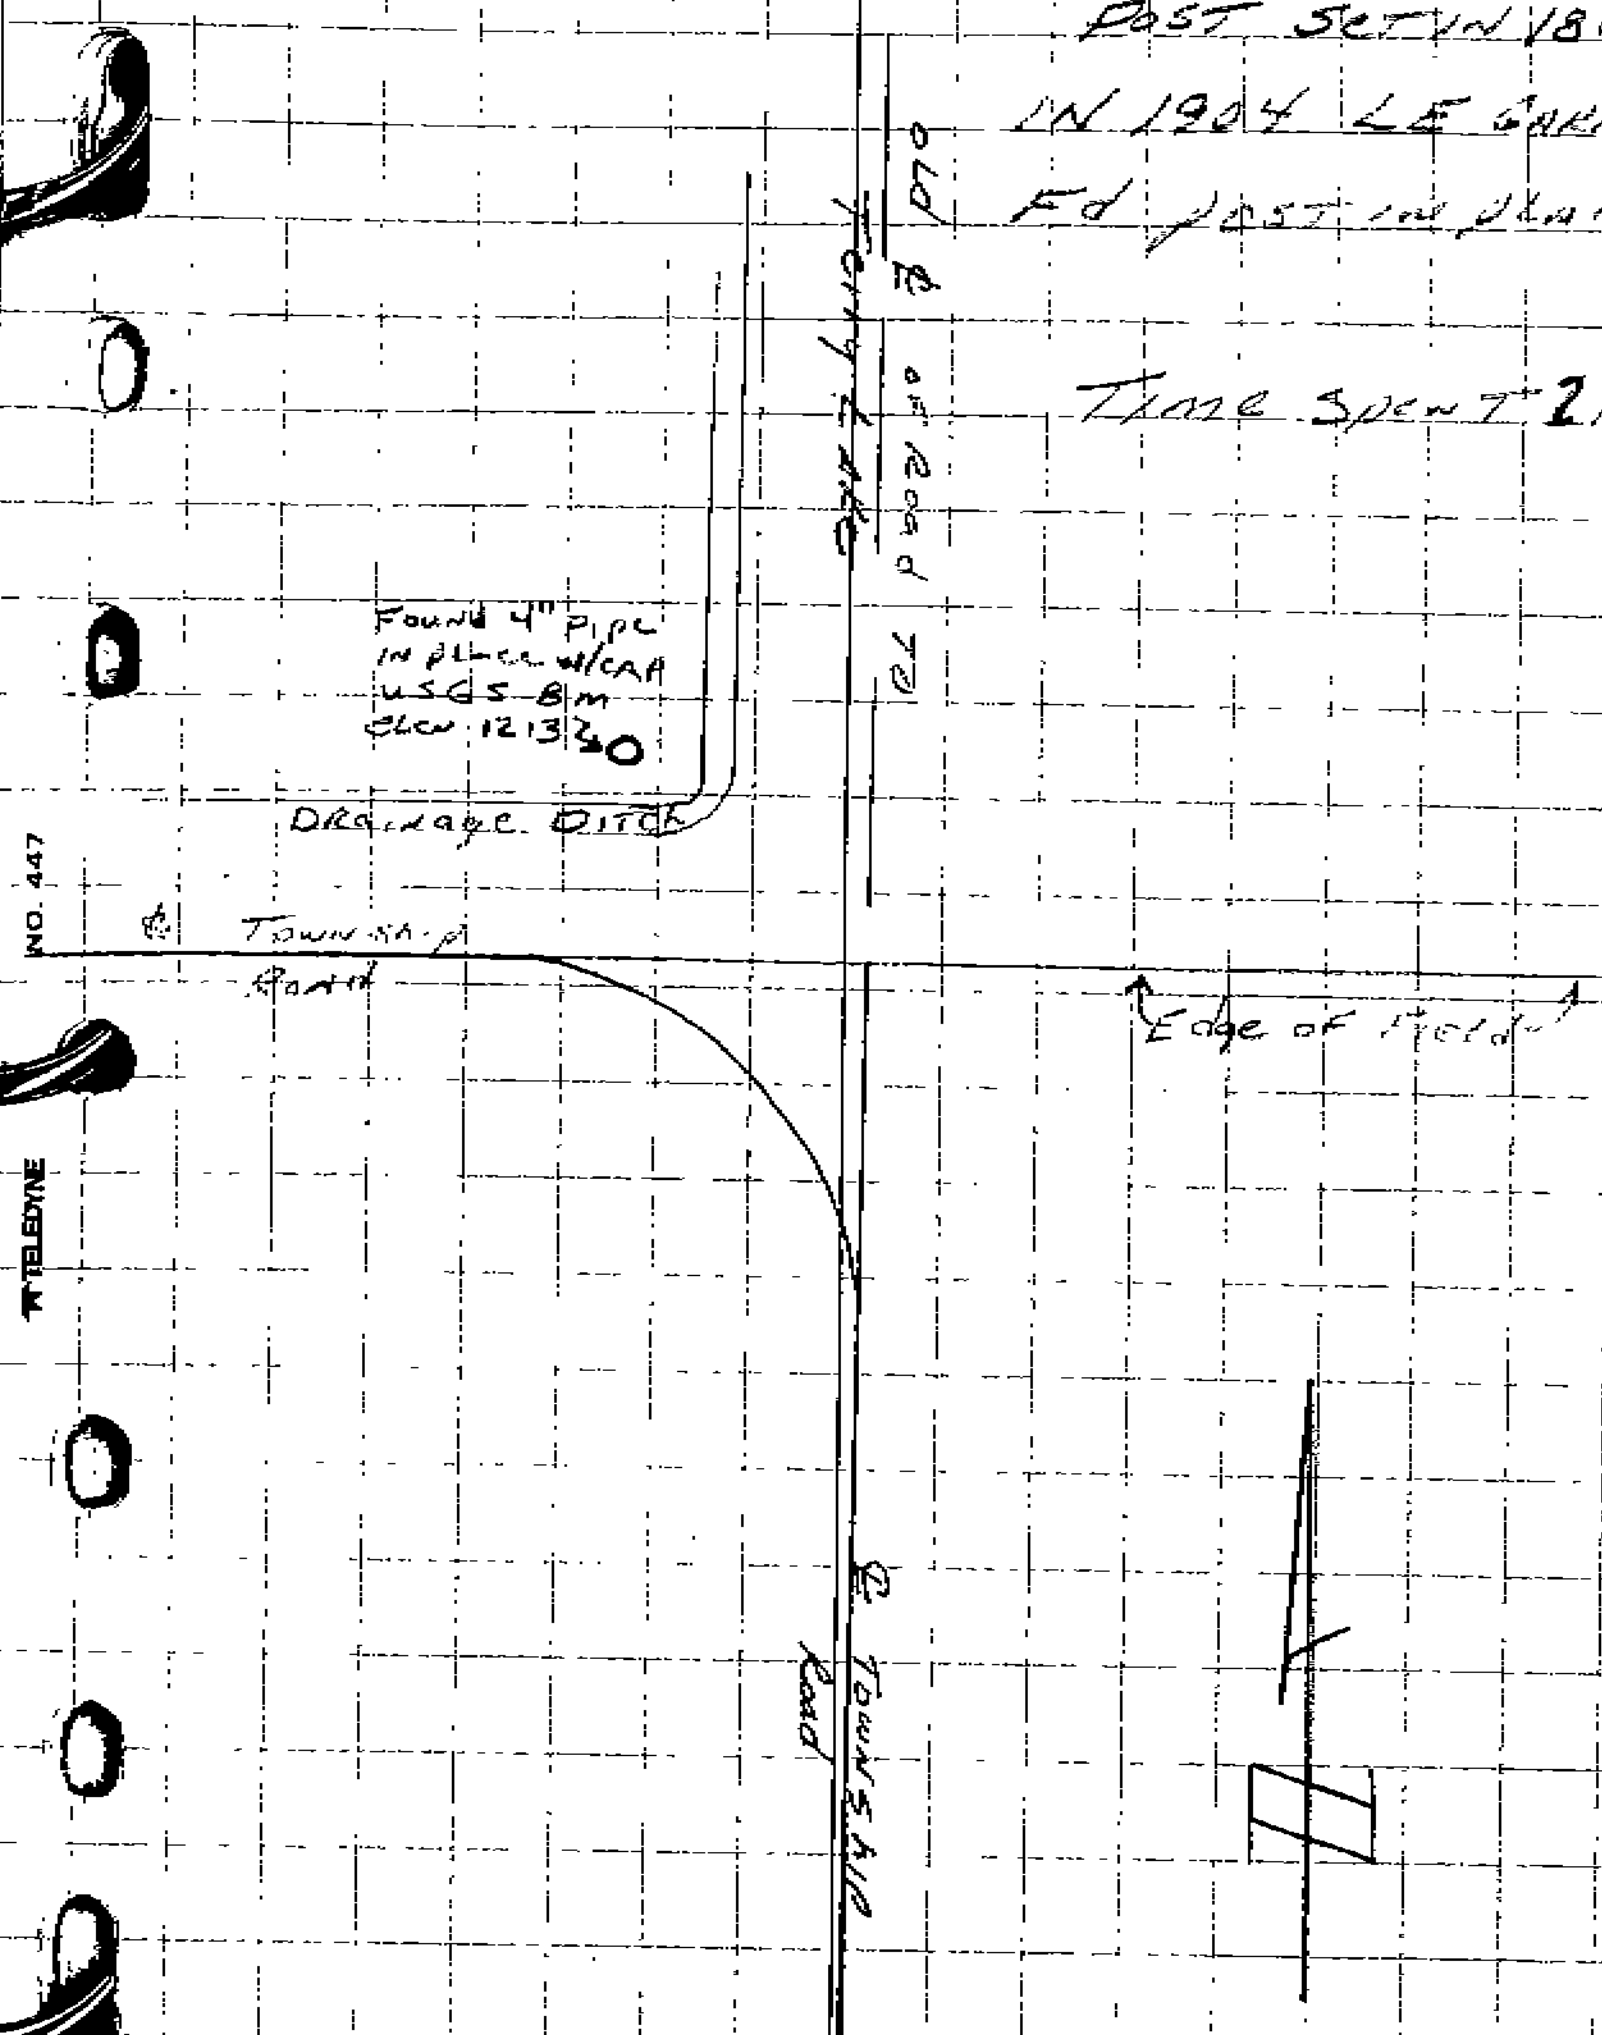
old ℄ of Road to Ferry Lake
Found 4" pipe in place w/cap USGS BM elev 1213.30
Drainage Ditch
℄ Township Road
Edge of Field
℄ Township Road
NO. 447
TELEDYNE

Tom [illegible] Corner Common to
Steve [illegible] Sections 1-2-11-12
Mark Betzey T 136-23
[illegible] 1981 E-21

19
50

Post set in 1863;
Curo set 3/4 x 10' Iron for temp. [illegible]

5" Pop in N45E 110 ft

Cuts 2" Birch [illegible] 12
Ties 5" [illegible] [illegible]

Time Spent
3 hours

2" Oak S37E 24

.305 [illegible]

Fd 3/4" Solid Iron pin 3" Below [illegible] .25

Nail in 10" Red oak West 6

Nail in 16" Red oak South 22 .02

Nail in 10" Twin maple NE 30 .49

The Nails [illegible] 2' Above ground

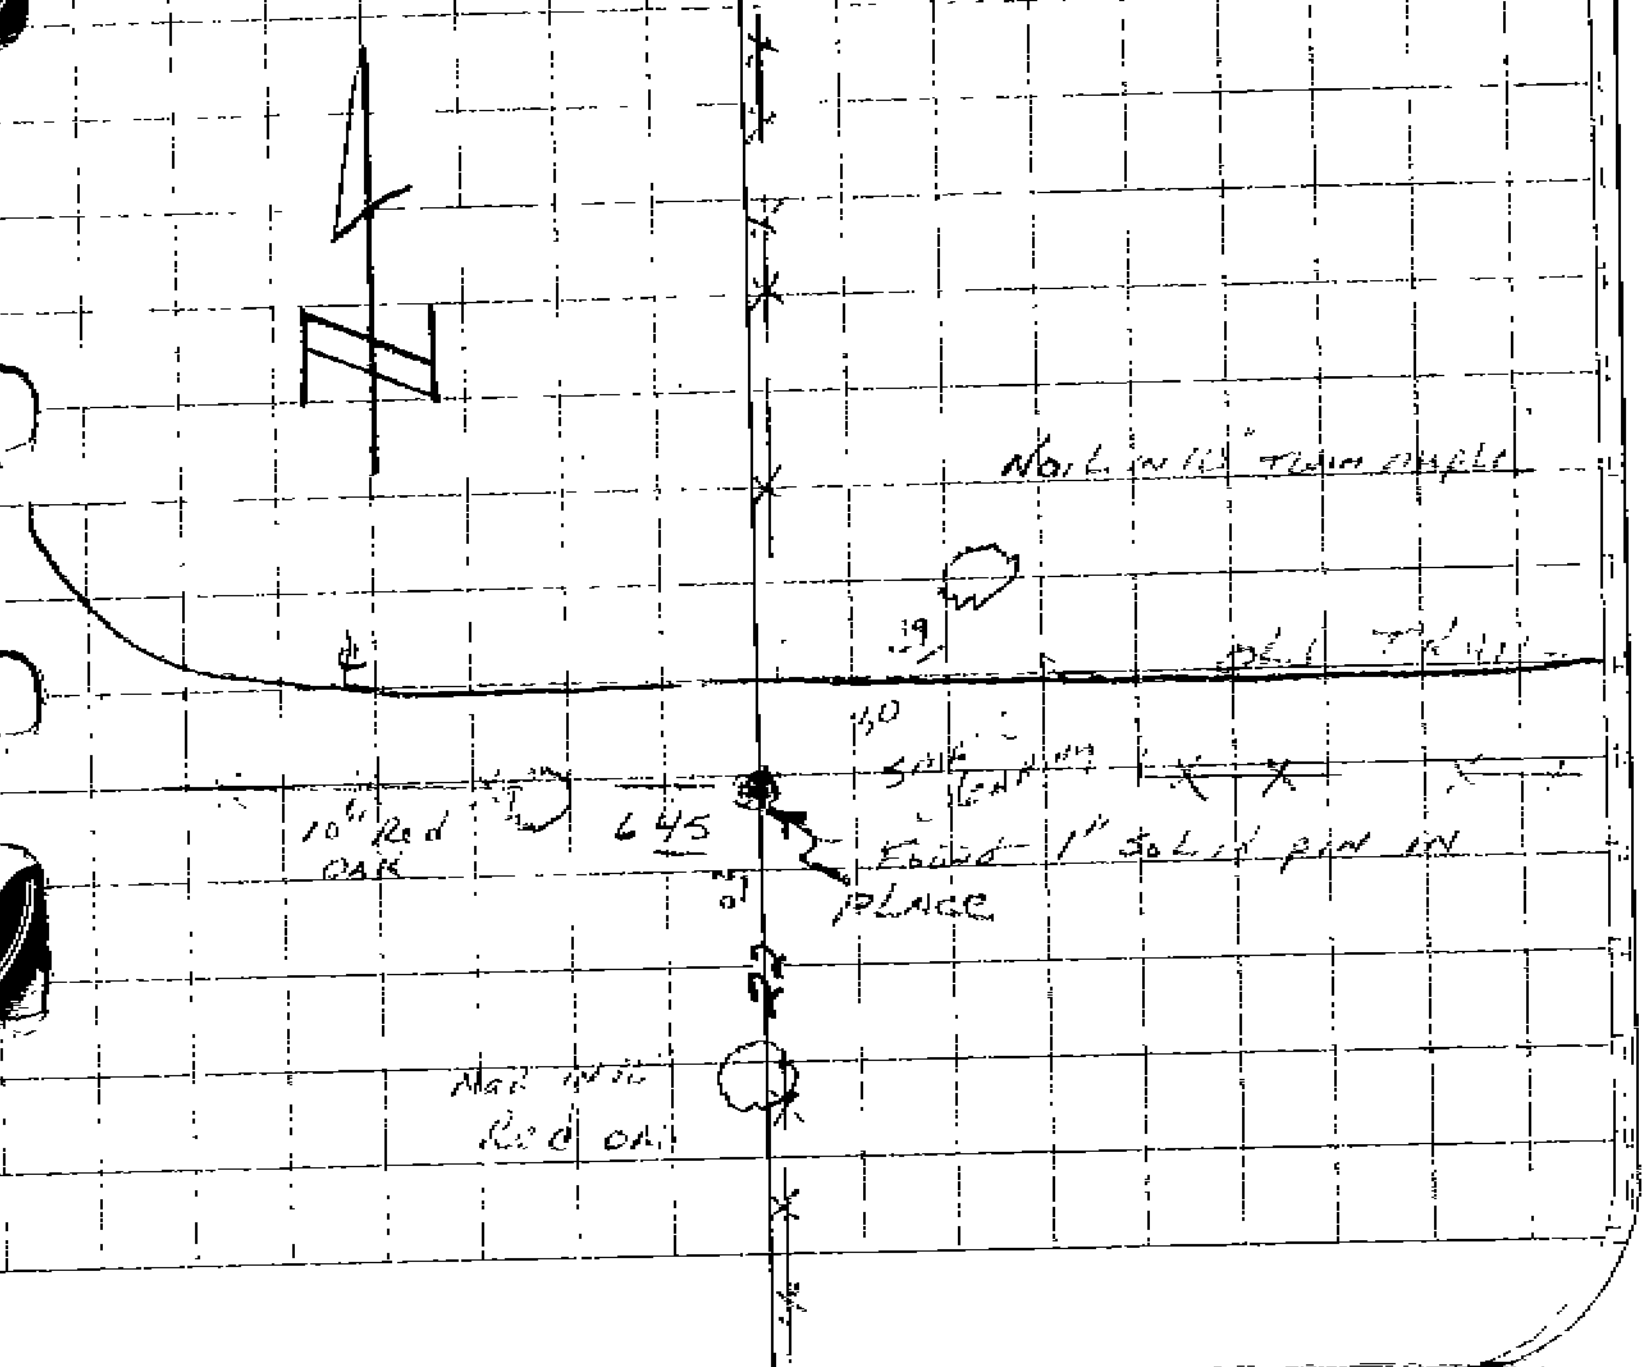

Quarter Corner Common To C-21
Sections 1 & 2
Tom Gallinghouse T 136-25
Steve Blanich
Mark [illegible] June 18, 1981

Found [illegible] Yellow [illegible] Metal Sign
[illegible] [illegible] [illegible] [illegible]
"Marked" "Pulky 11-11-65
50' East [illegible] 1/4 Sec. Cor"
Time Spent 3½ Hours
Nail in 14" [illegible] S 50 W 47 CP
Nail in 5" [illegible] S 40 W [illegible]
Nail in 3" [illegible] [illegible] [illegible]

Fd 2" & 3/4" Iron [illegible] inside 3/4 pipe
with Cap # 7672 [illegible]
Surface of [illegible]
In 1863 Orig. Set [illegible] BT's ;
In 1922 J Clark Set 3/4" Iron
[illegible] [illegible] [illegible] BT's.

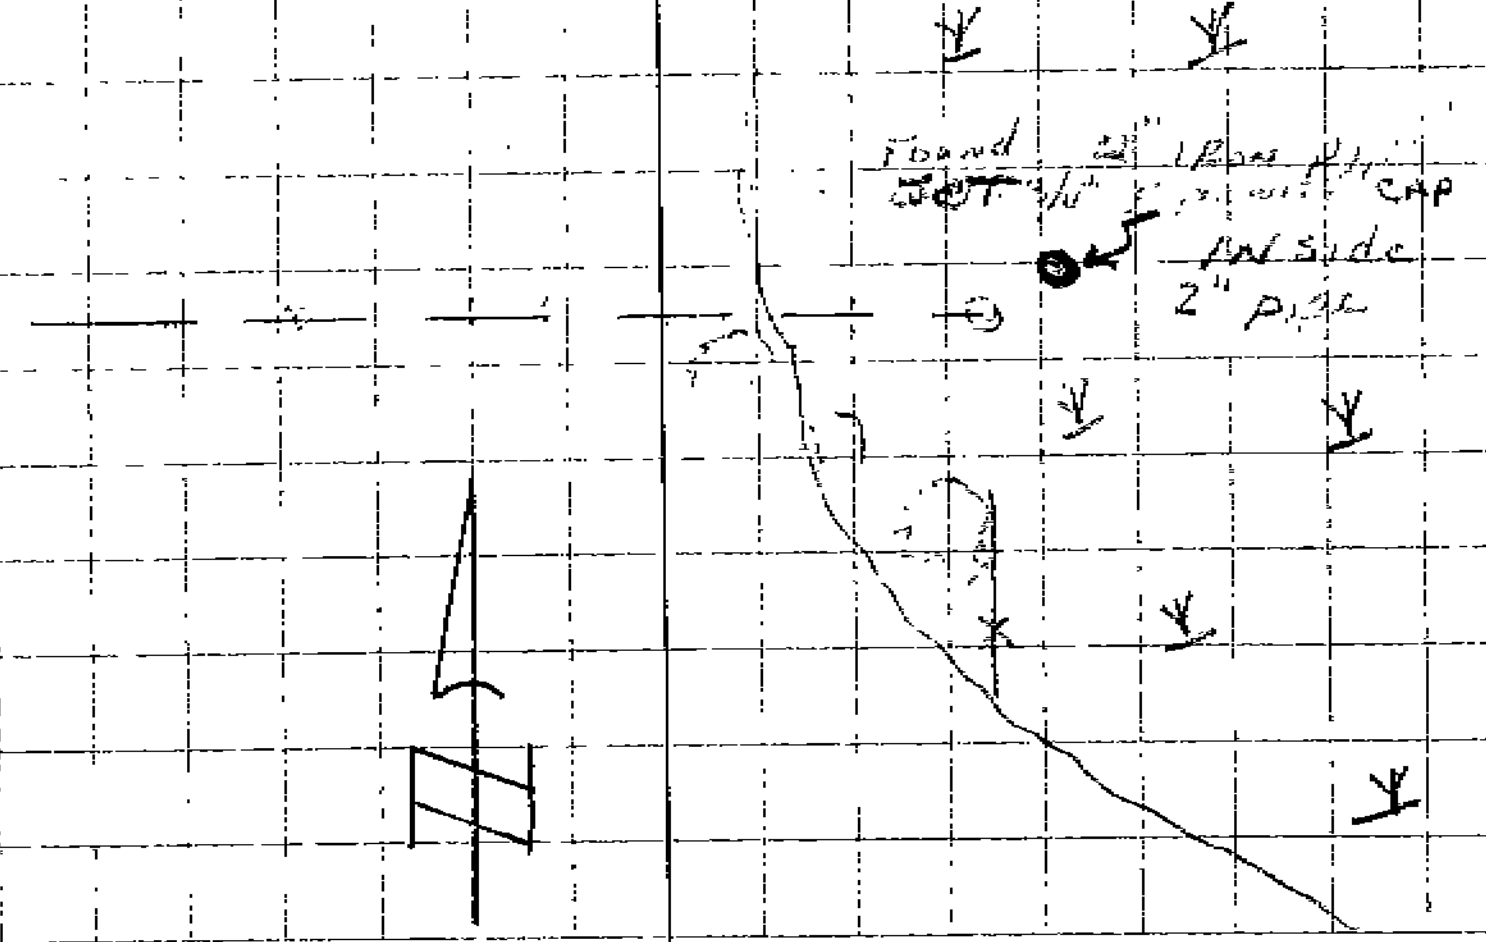

Jim Garlinghouse June 18, 1981.
Steve Blanick
Mark Betley
G-17
Quarter Corner common to
Sections 10-11 T 136-25

Nail in Corner Fence post South $34^{\underline{94}}$

Nail in Corner Fence post North $32^{\underline{13}}$

Nail in Fence post N.W. $57^{\underline{00}}$

East end Culvert S60E 32^{39}

West end Culvert S10W 20^{83}

Time spent 2½ Hours

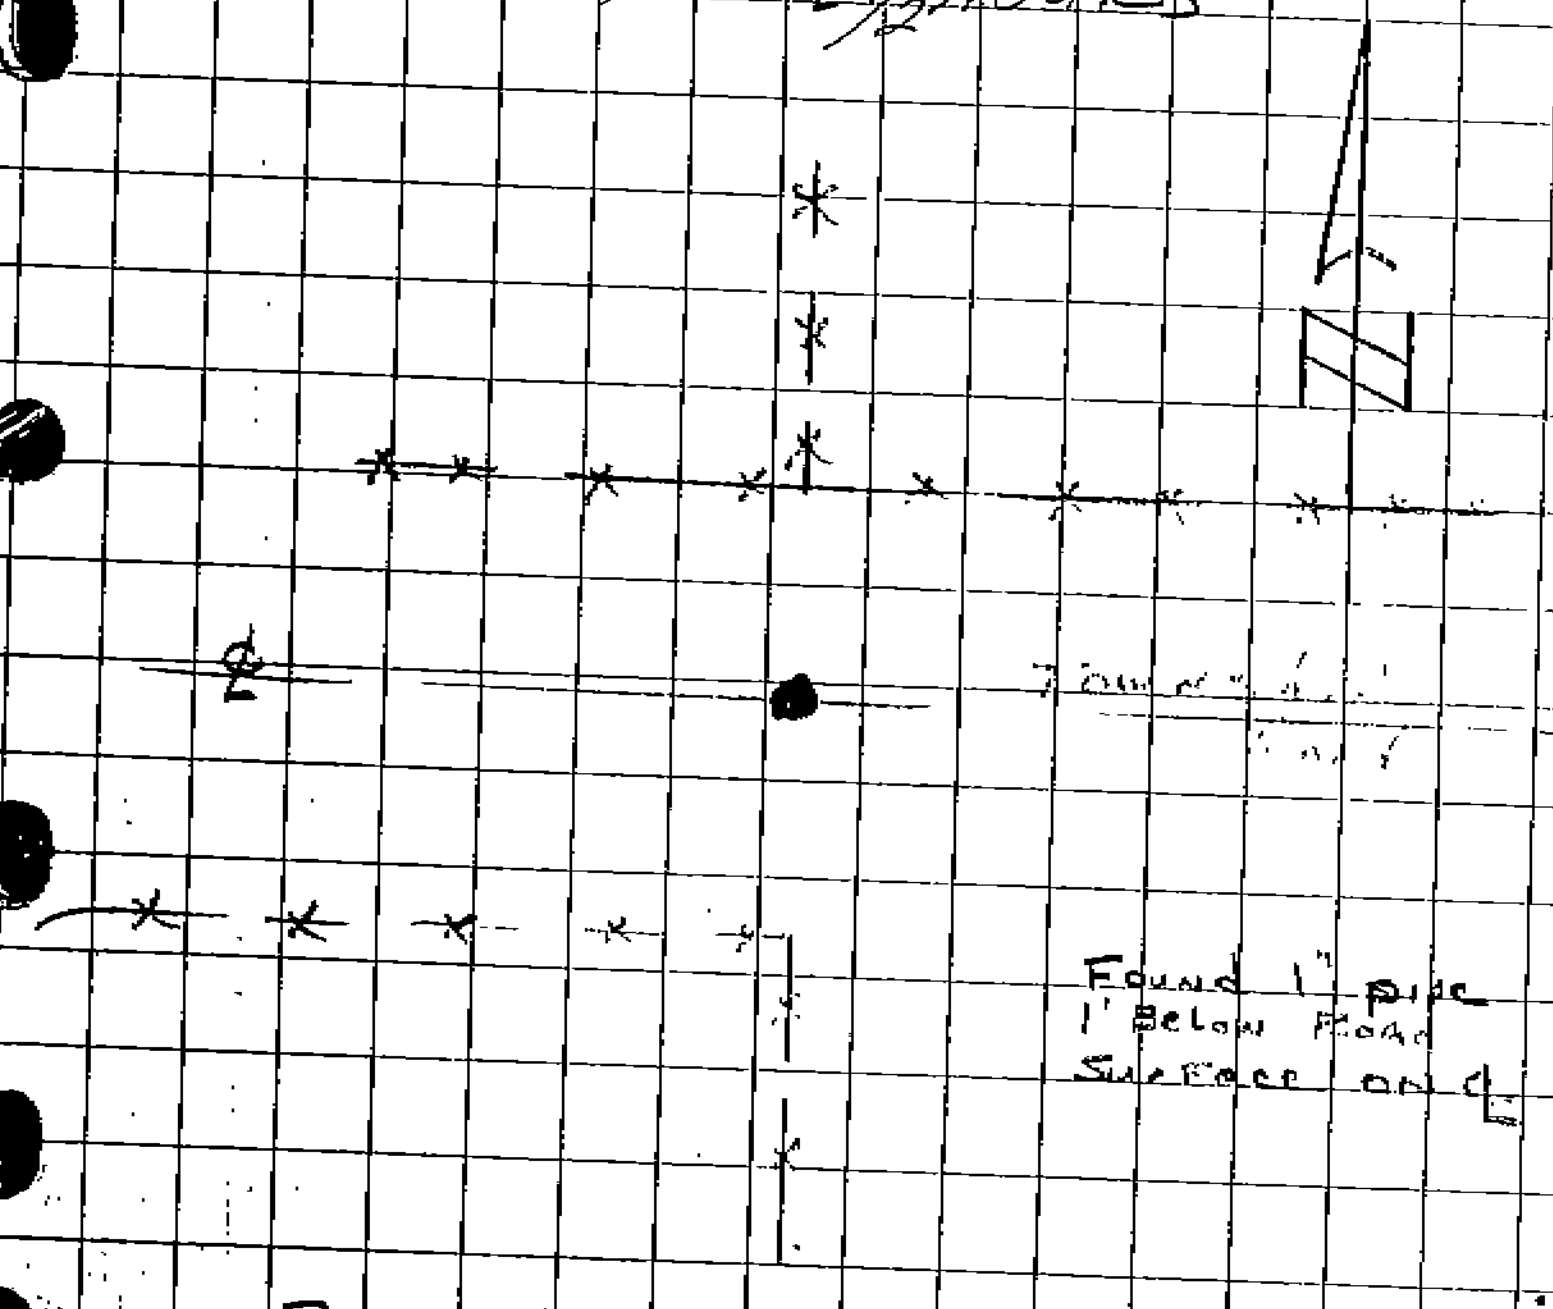

Post set in 1863 with BT's;
Reset in 1904 By LE Garrison

Sept 28, 1981
1/4 Cor Common To Sec 8-9 -136-25
G-9

Tom Gaebelinghouse
Steve Blanich
Terry Sorakaja

Orig Tees 20" OAK S 63N 36 LK
↓ 24" OAK S57E 41LK

To Post Set in 1863

Searched For 2 hours Nothing Found.

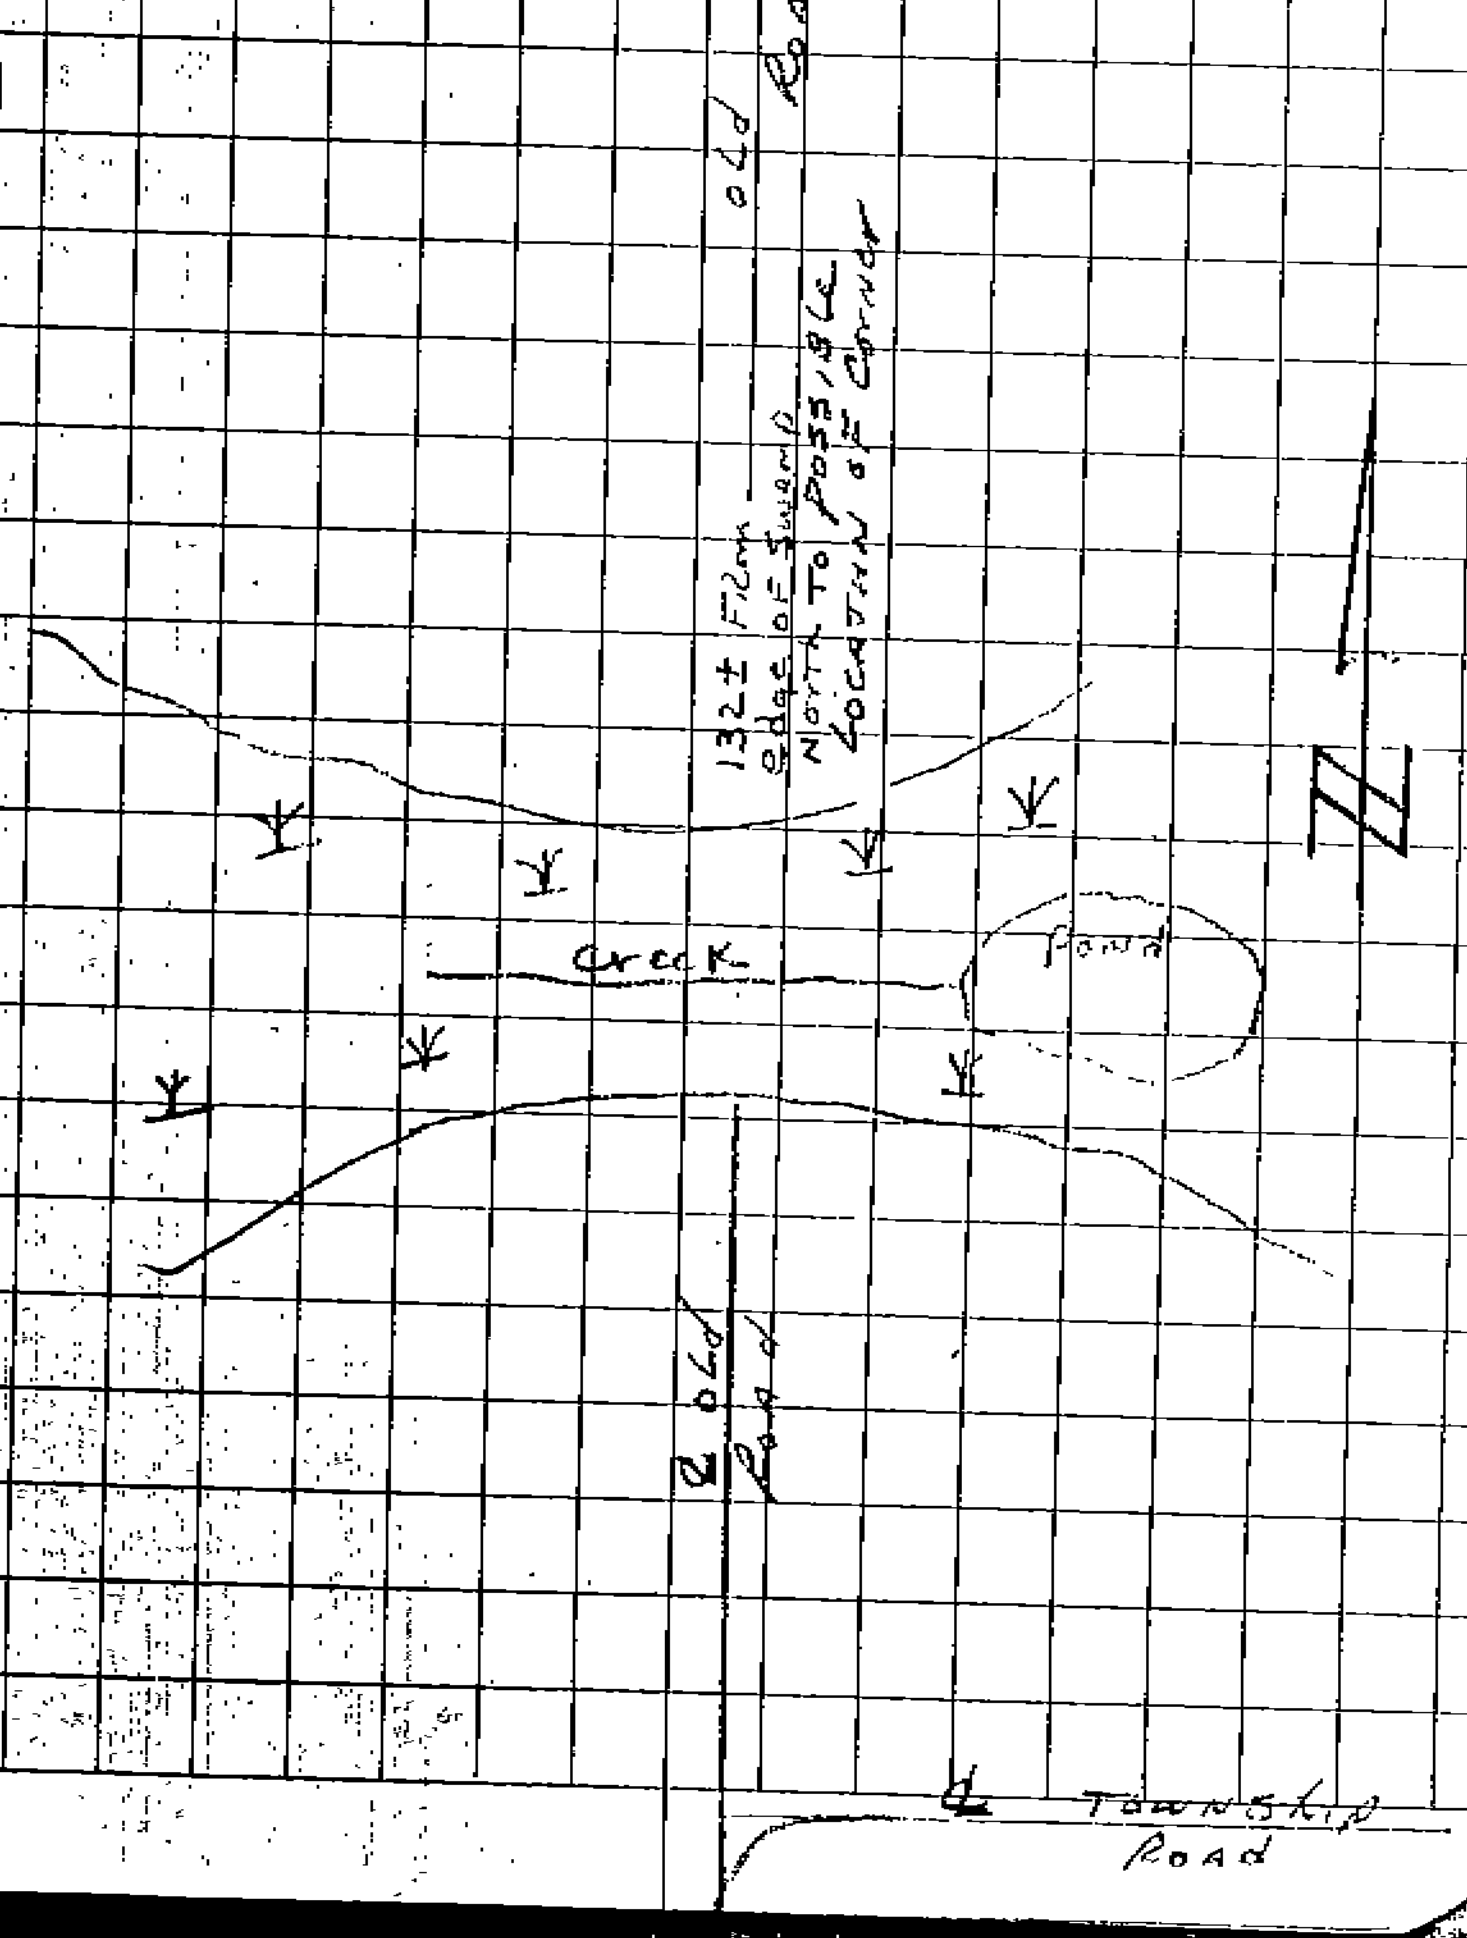
old Road
132± From edge of Swamp North To Possible Location of Corner
Creek
Pond
N
℄ old Road
℄ Township Road

SEPT 27, 1981
Tomi Garlinghouse
Steve Blanich
Terry Savaloja

E-9

23
54

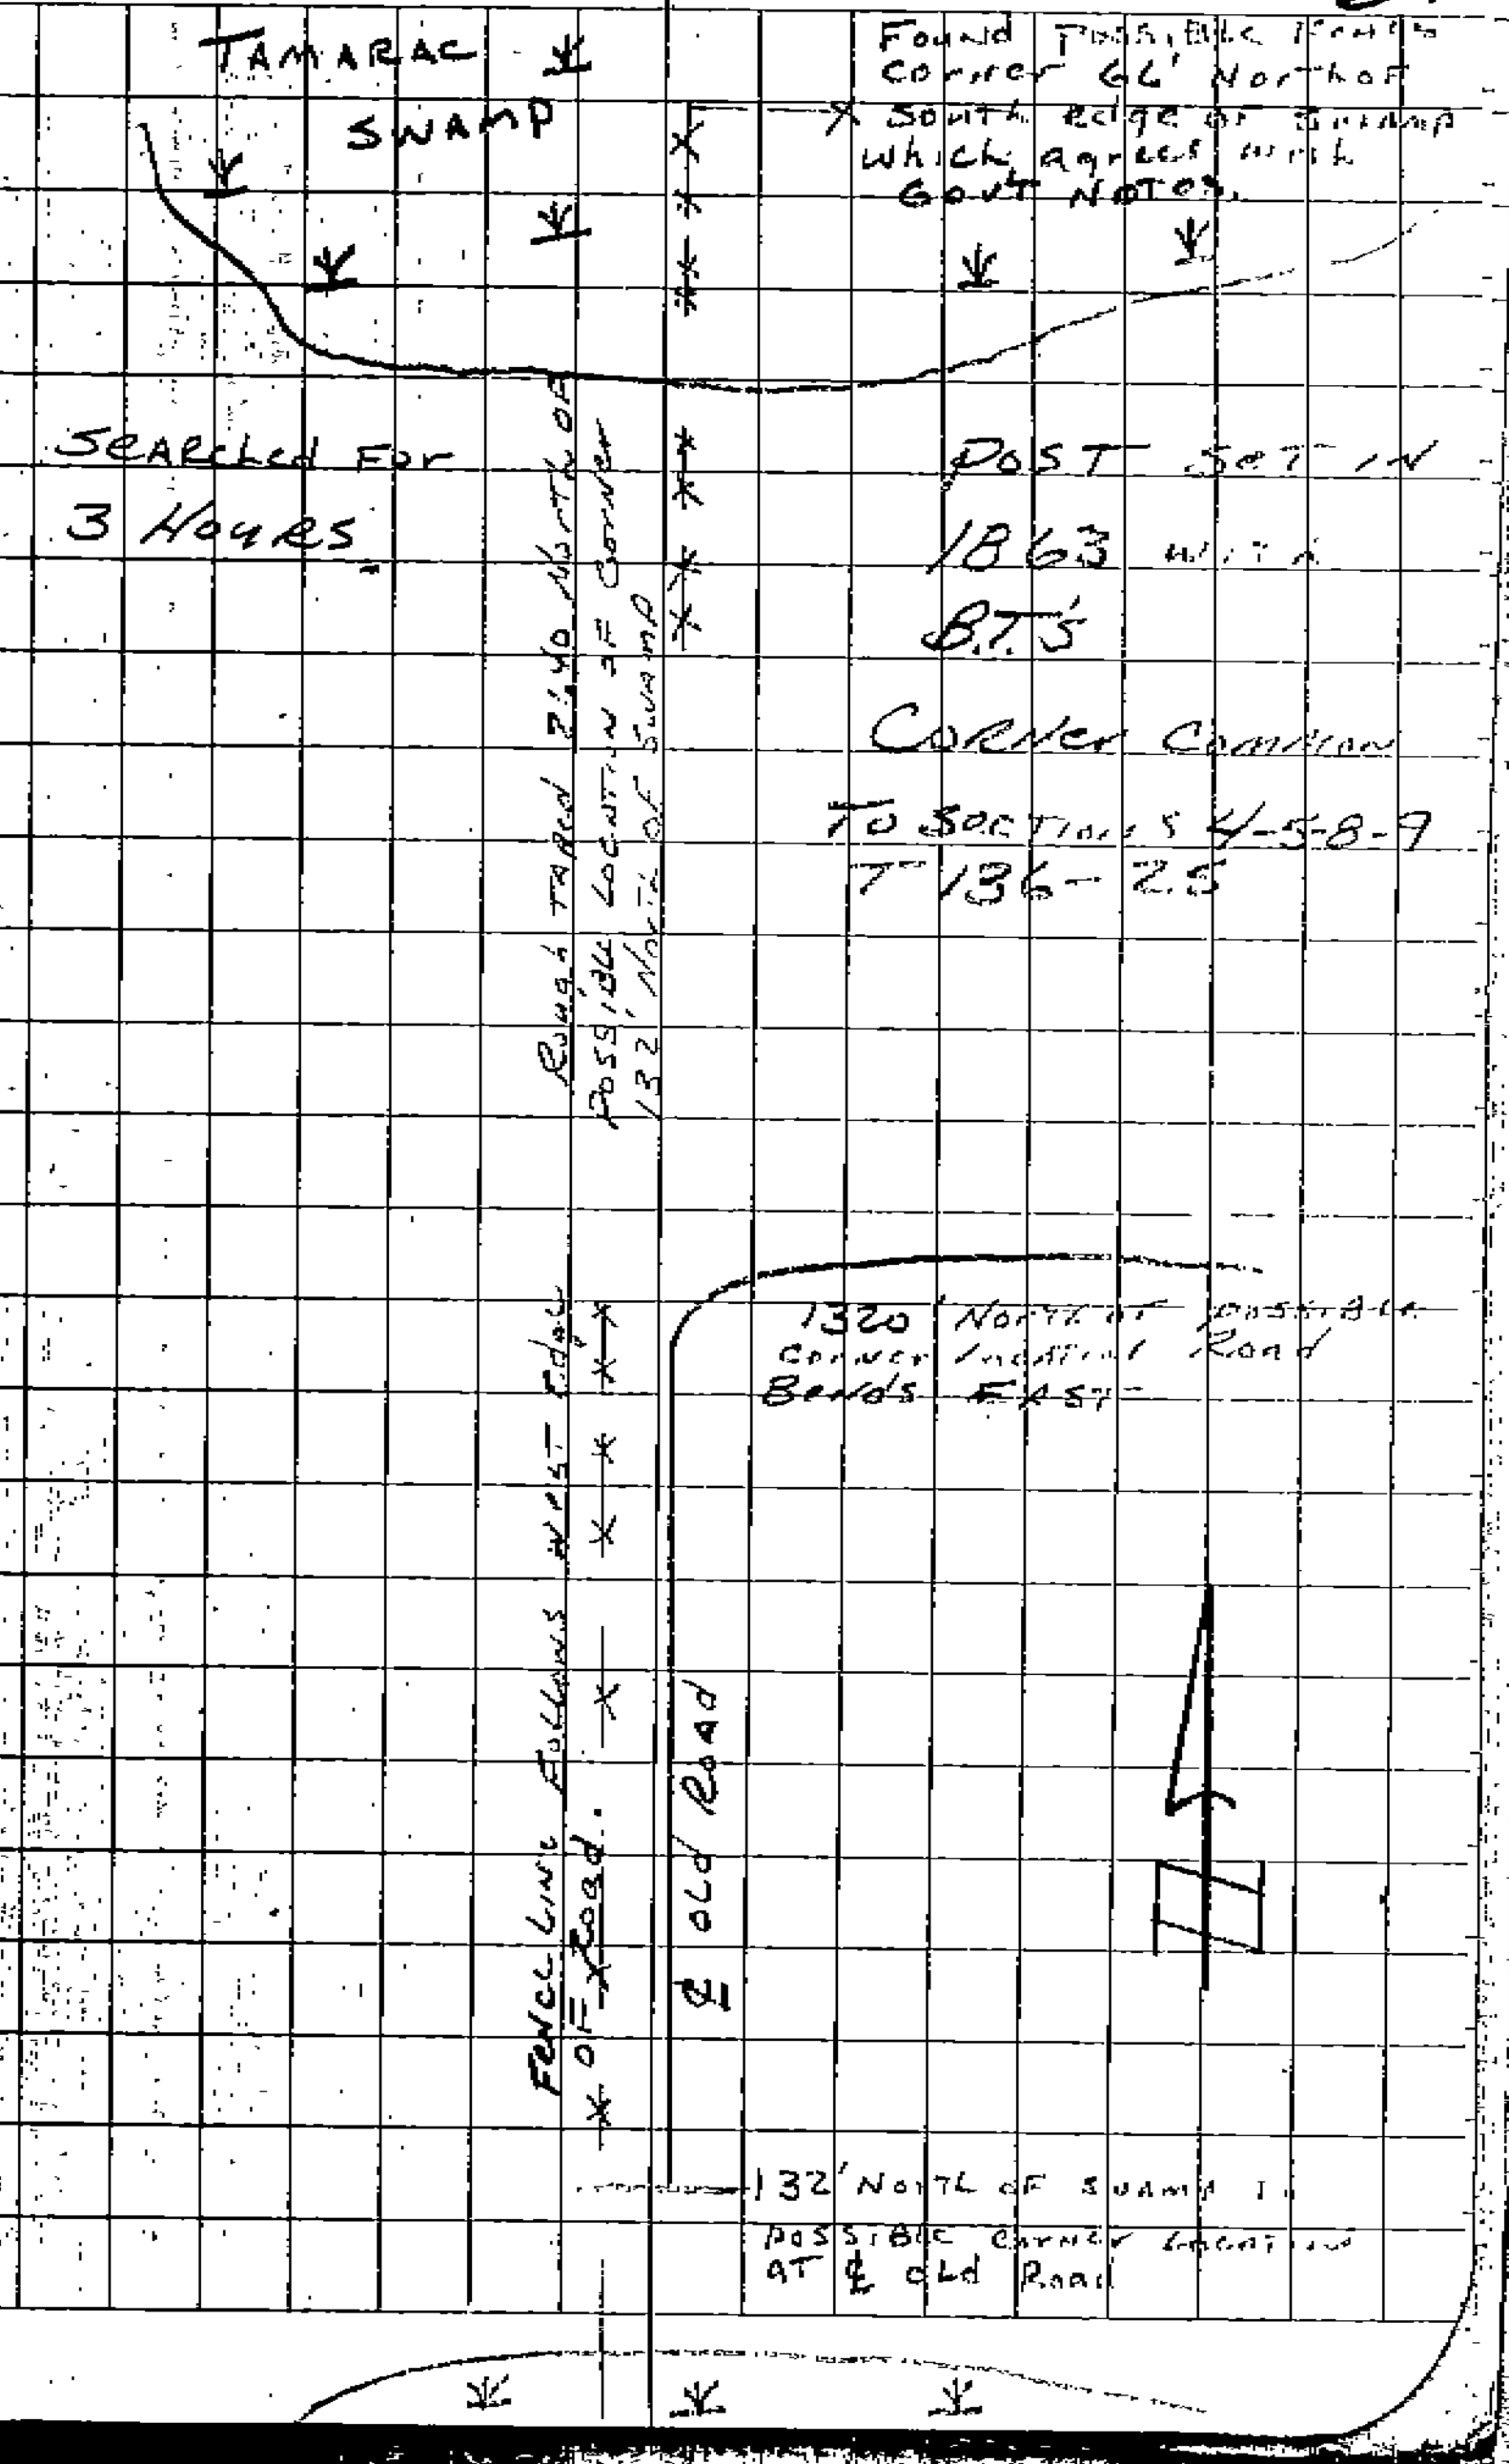

Found Possible Fence Corner 66' North of South edge of Swamp which agrees with Govt Notes.

Searched For 3 Hours.

Rough Taped 2140 North of Possible Location of Corner 132' North of Swamp

Post Set in 1863 with B.T.'s

Corner Common To Sections 4-5-8-9 T 136- 25

1320' North of possible Corner Indicated Road Bends East

Fence Line Follows West Edge of Road.

132' North of Swamp I..

Possible Corner Location at ℄ Old Road

QUARTER CORNER COMMON TO
SECTIONS 16-21-136-25
N-11

SEPT 29, 1981

Tom Garlinghouse
Steve Blanich
Terry Savalota

CURO'S TIES 1922	2" x 12 STAKE	Searched FOR 3 hours
2" STAKE N 45 E	45'	
2" STAKE S 45 W	45'	
ORIG TIES 10" BLK ASH	S 64 E	64 LK
6" BLACK ASH	N 88 E	48 LKS

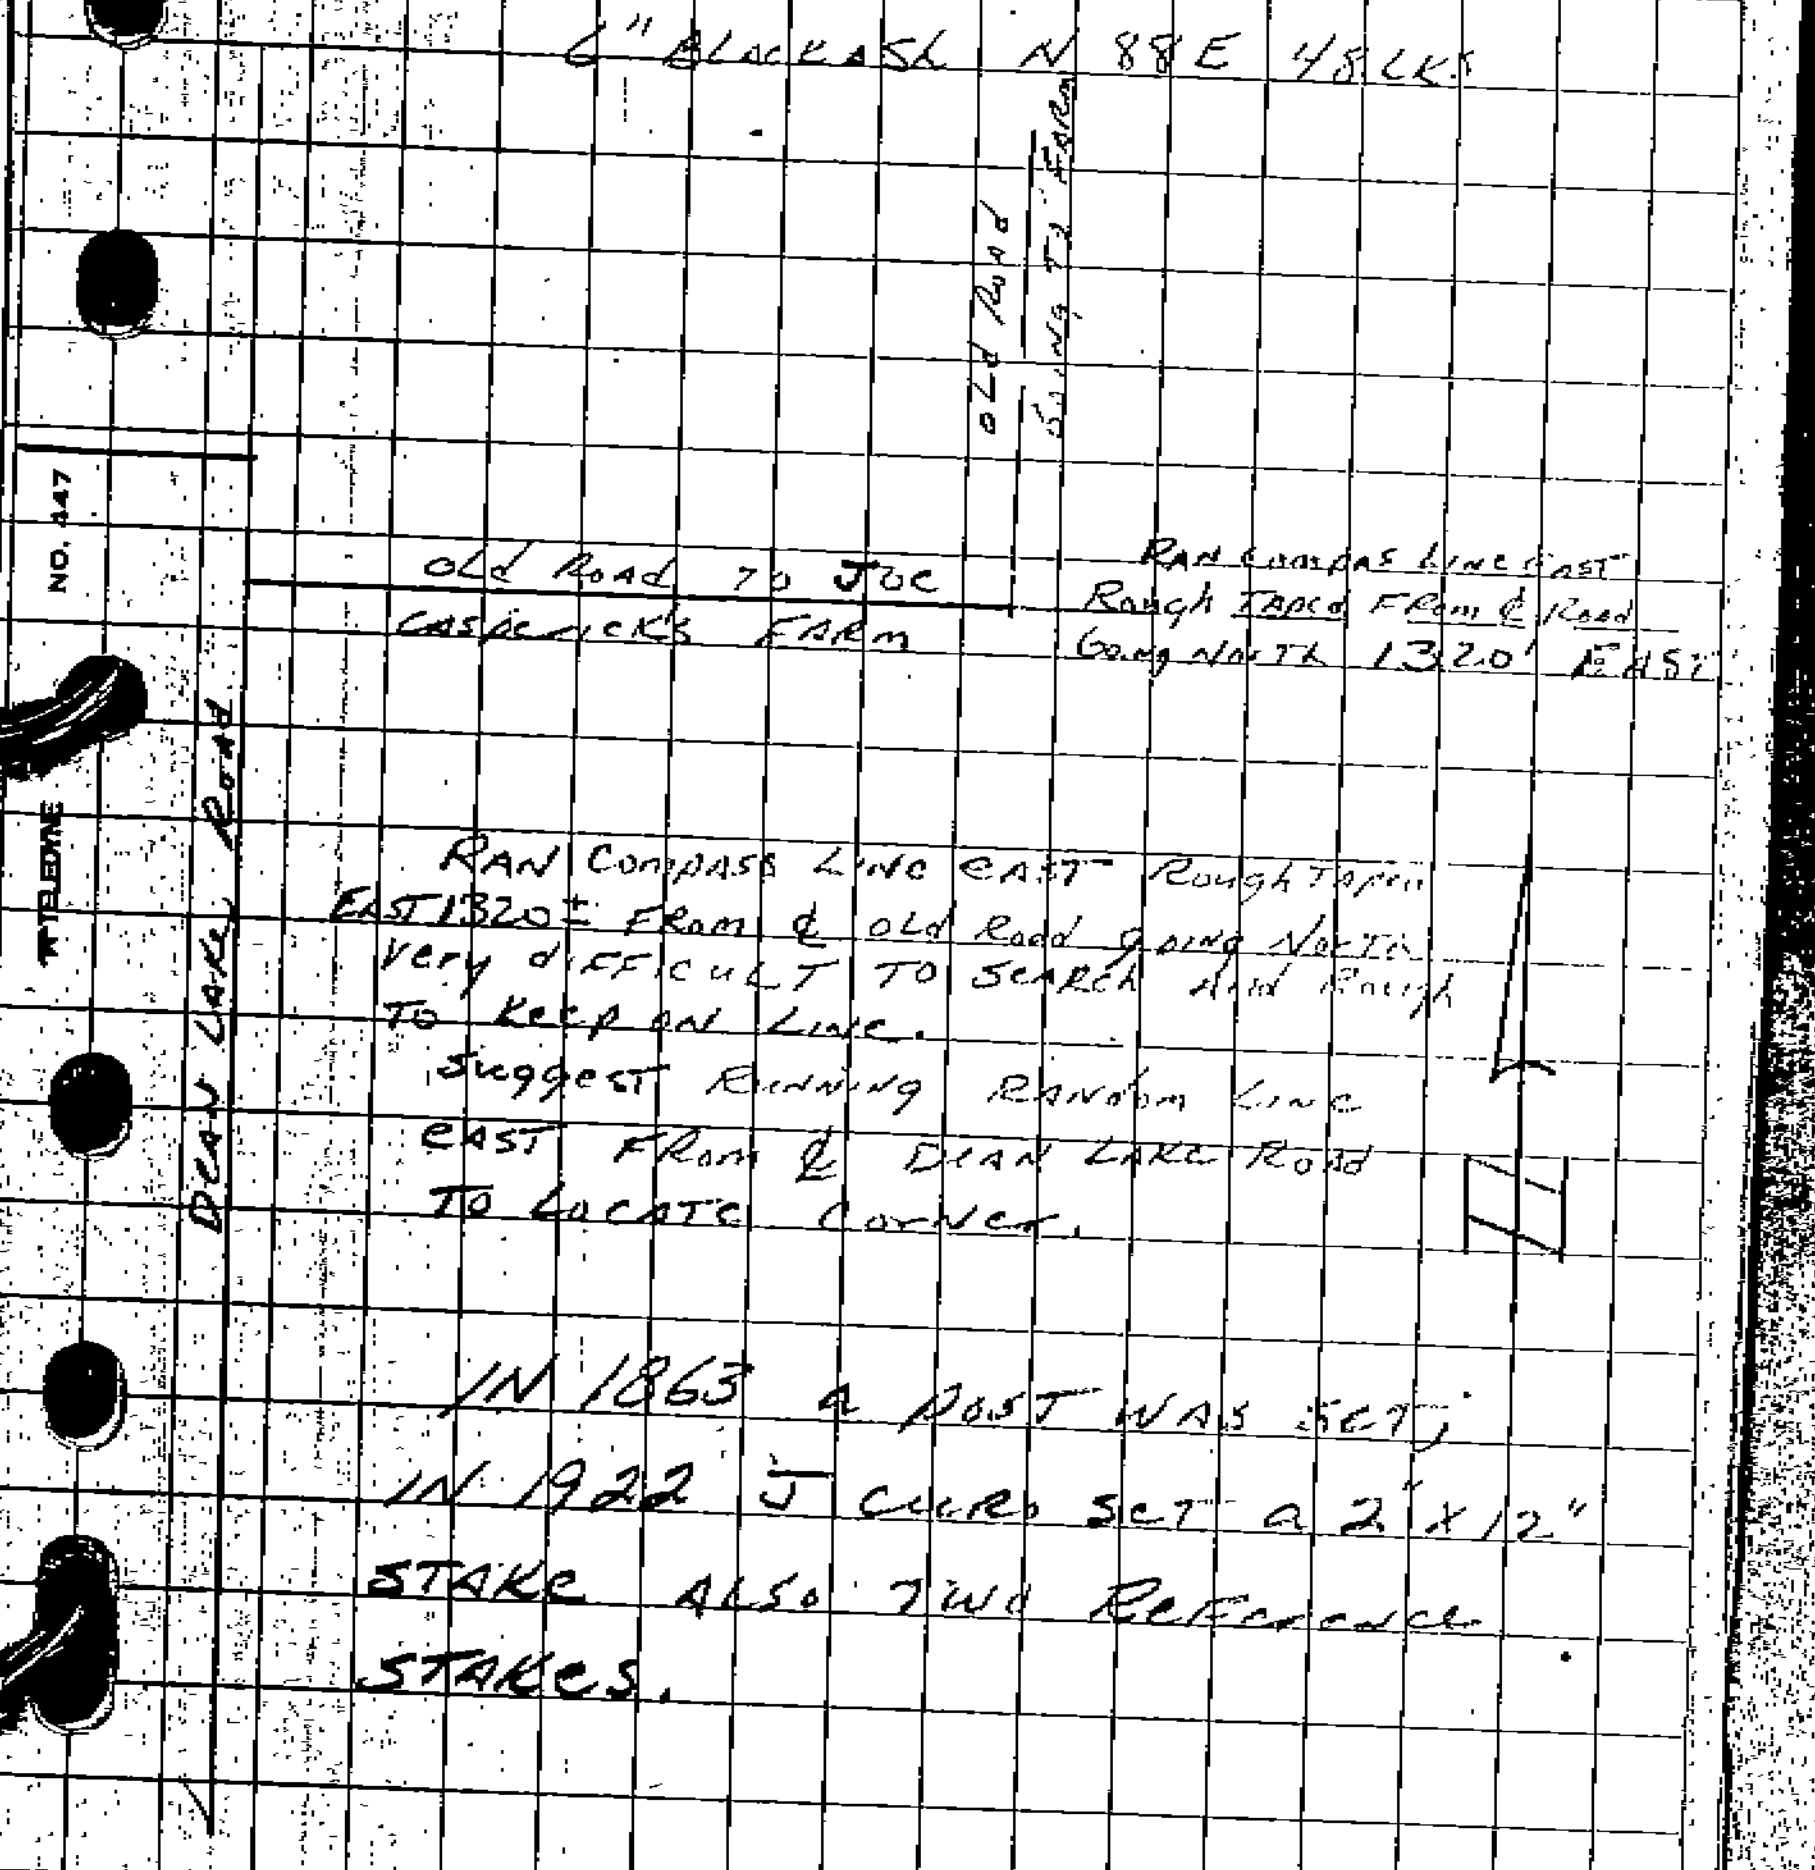

Ran Compass Line East
Rough Taped From ℄ Road
Going North 1320' East

RAN Compass Line EAST Rough Taped
EAST 1320± FROM ℄ old Road going North
Very difficult to search and Rough
To keep on line.
Suggest Running Random line
EAST FROM ℄ DEAN LAKE Road
TO Locate Corner.

IN 1863 a POST WAS SET;
IN 1922 J CURO SET a 2" x 12"
STAKE ALSO TWO Reference
STAKES.

Sept 29, 1981
Tom Garlinghouse
Steve Blanich
Terry Savaloja

Searched For 3 Hours
E-11 And E 11/12

Quarter corner Common to Sec 4-9 136-25
Post set in 1863 with wh pine B.T.'s
MC Common to Sc 4-9 West Shore Nelson lake
Post set in 1863 with poplar B.T.

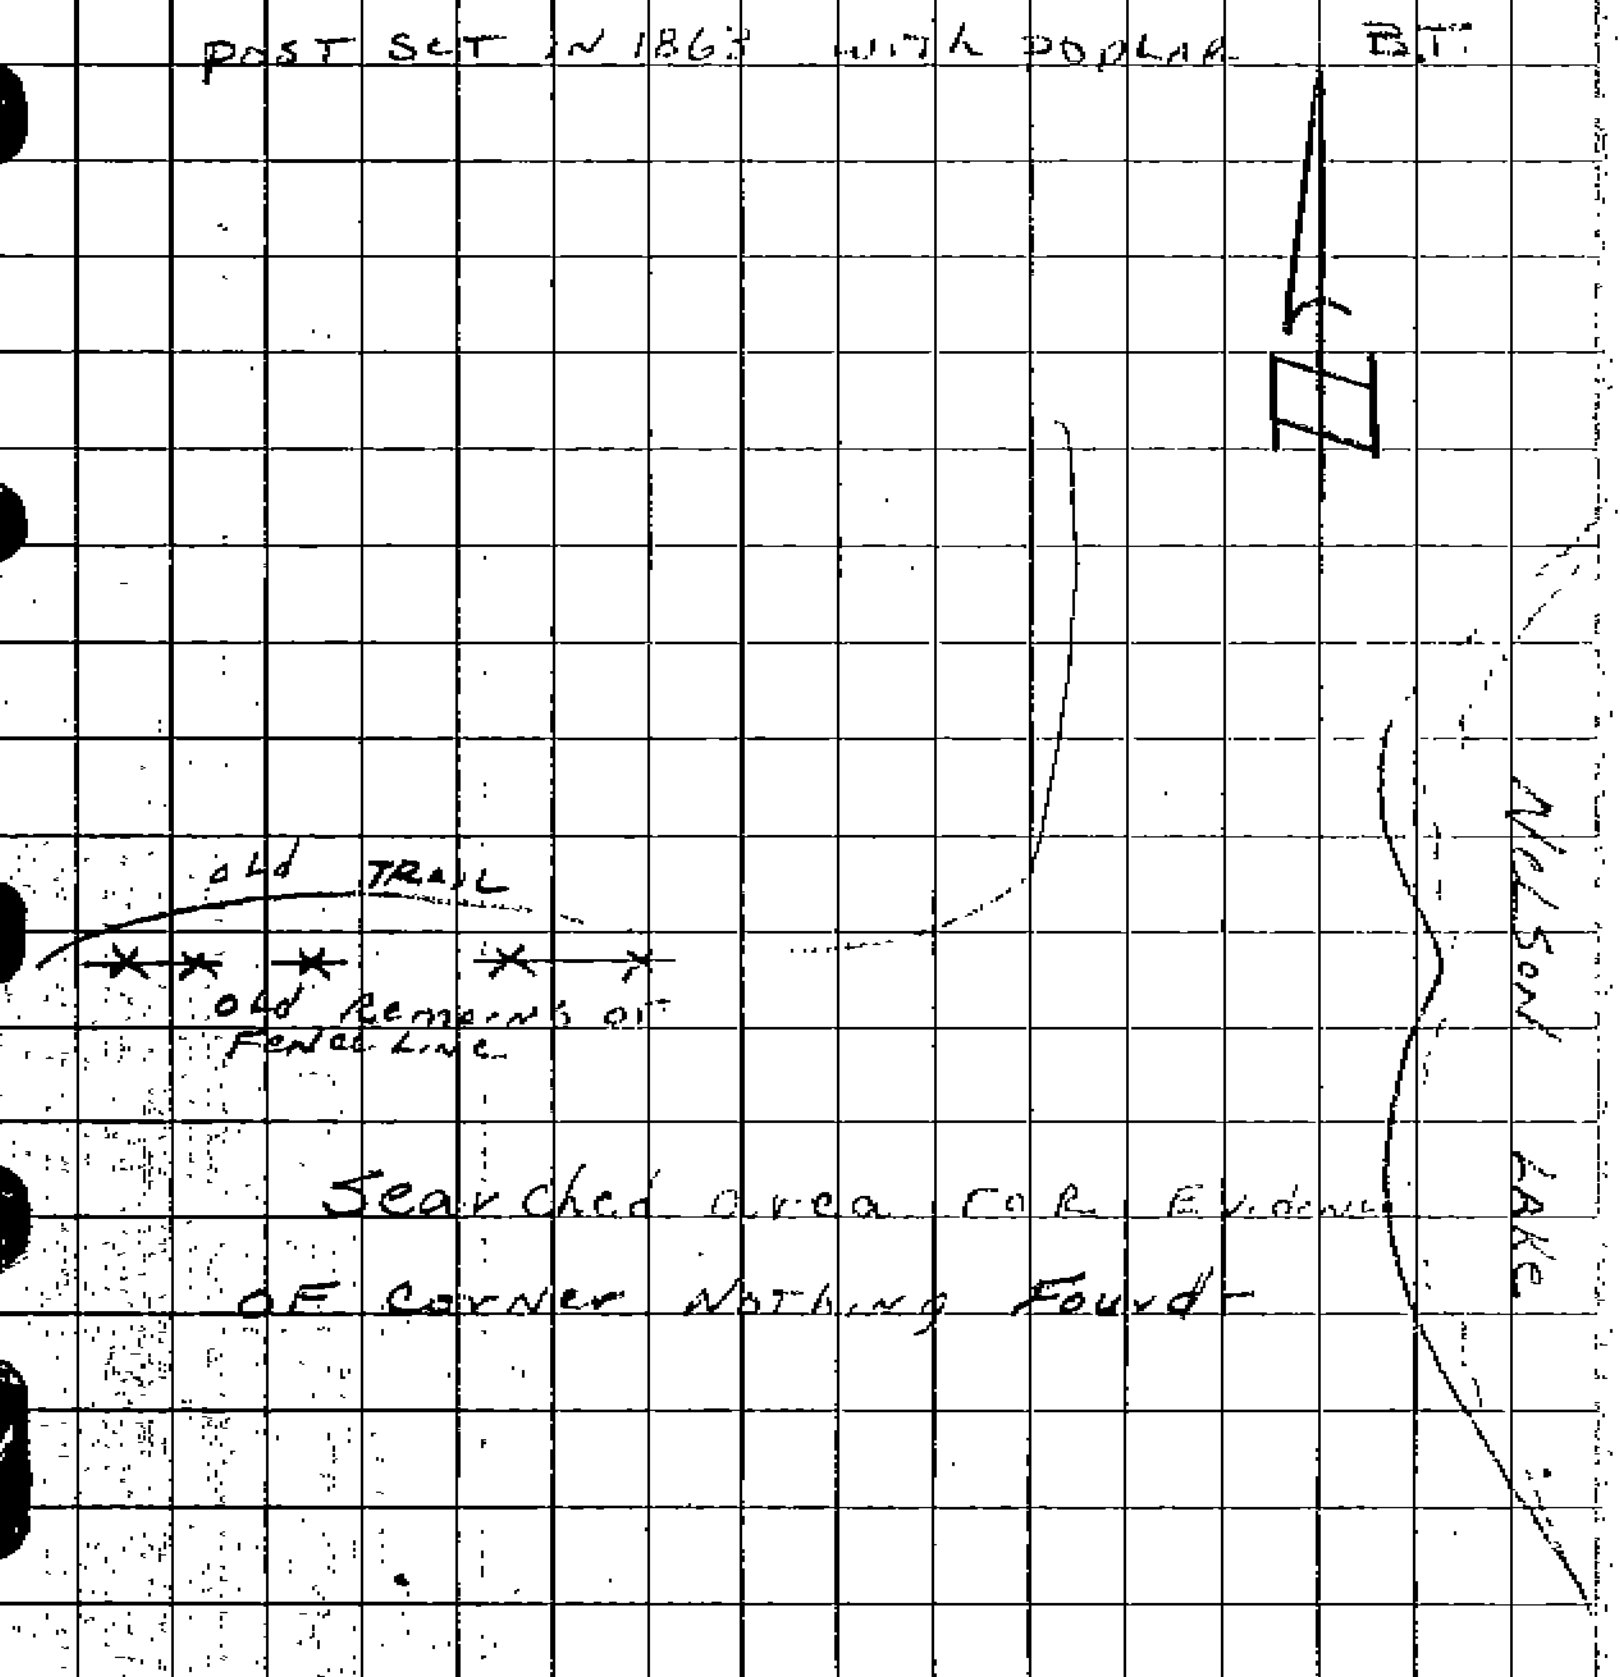

Searched area for Evidence
of corner Nothing Found

Tom Garling Ahn Sec
Mark Betley
Steve Blanich
June 29, 1981

Measured distance 90-13-45 805,756 m.
From N 1/4 cor
Section 15 to 269-46-40 2643.55 ft.
NE Cor Sec 15
Twp 136-25 2643.83

Measured distance from
North 1/4 cor Section 15 to NE
Cor Sec 15 Twp 136-25

1 hour